

共享夾鉗及精密機械配件解決方案的全球化資源
在www.twhaoshou.com可獲得二維和三維CAD文件



**臺灣好手科技股份有限公司
東莞市好手機電科技有限公司**

國際銷售中心：
香港九龍望角道33號凱途發展大廈7樓04室
電話：00852-27935511
傳真：00852-35902333
國際郵箱：export-sale1@twclamp.com
國際網址：www.haoshouclamp.com

中國生產工廠：
中國東莞市寮步鎮繆邊鴻利工業區14號廠房
電話：+86-769-83528312 83528313
傳真：+86-769-83528311
郵箱：haoshou@twhaoshou.com
網址：//www.twhaoshou.com

TAIWAN HAO SHOU TECHNOLOGY CO.,LIMITED
DONGGUAN HAOSHOU ELECTRICAL TECHNOLOGY CO.,LIMITED

International sales center:
address:unit 04,7/F,Bright Way Tower, No 33 Mong Kok Road,
Kowloon,HK.
Tel:00852-27935511
Fax:00852-35902333
International e-mail: export-sale1@twclamp.com
International website: www.haoshouclamp.com

China Factory:
Address: Workshop No.14, Mubian Hongli Industrial Park ,
Liao Bu Town,Dongguan Guangdong,China
Tel:+86-769-83528312 83528313
Fax:+86-769-83528311
E-mail:haoshou@twhaoshou.com
http://www.twhaoshou.com

本公司對產品規格、設計特性均不斷研究改進，
上述規格若有變更，恕不另行通知。
Specifications and design characteristics are subject
to change without prior notice.

版權所有 翻印必究
All rights reserved pirated

快速夾鉗—精密機械配件

東莞市好手機電科技有限公司



HS® **好手科技**
HAO SHOU **HAO SHOU**



快速夾鉗
TOGGLE CLAMPS
精密機械配件
PRECISION MACHINERY ACCESSORIES

綜合目錄
COMPREHENSIVE CATALOG



臺灣好手科技股份有限公司
TAIWAN HAO SHOU TECHNOLOGY CO.,LIMITED
東莞市好手機電科技有限公司
DONGGUAN HAOSHOU ELECTRICAL TECHNOLOGY CO.,LIMITED

www.twhaoshou.com

質量為先，信譽為重，管理為本，服務為誠
追求卓越無止境、與時俱進創未來

——好手科技·服務全球



好手機電科技有限公司是一家集研發設計、生產制造和銷售為一體的公司，成立於2010年，座落於中國制造名鎮-東莞寮步鎮，一直致力於快速夾鉗、高精密氣缸，油壓缸、液壓站（液壓動力單元）、精密機械配件及動向螺桿等系列產品的研發營銷。經過不斷的積累創新，現已發展成一家技術力量雄厚、結構完善的新型企業。為了高品質的服務客戶，公司不斷引進高端管理及技術人才，在公司優秀團隊的共同努力下，榮獲“高新技術企業”榮譽稱號，同時通過了

“ISO9001:2015國際質量體系”認證。東莞好手科技秉承臺灣好手科技股份有限公司的技術優勢，擁有數控車床法蘭克操作系統和CNC加工中心三菱操作系統生產設備，結合公司強大的銷售團隊，產品遠銷東南亞地區和歐美各國，服務於千家不同領域的客戶。

好手機電科技有限公司專注於飛機、汽車制造業和工業界所需工裝、專用夾具的產品營銷、服務及研發，竭力為中國制造業提供穩定可靠、耐用精準的得力工具。公司堅持顧客至上，憑借專業的技術為客戶提供多樣化的選擇，除各類通用夾具外，還可根據客戶要求特別訂制，并能針對客戶需要設計出最優秀的產品。

Found in 2010, located in Dongguan City China, Dongguan Haoshou Electrical Technology Co., Ltd. is an integrated enterprise who specialized in R&D, manufacturing and marketing of toggle clamps, hydraulic clamp cylinders, pneumatic clamp cylinders, hydraulic power unit, precision mechanical parts and moving screw. After continuous accumulation of innovation, Haoshou has developed into an excellent enterprise with strong technical force and a sound organizational structure.

For providing customers best products and service, the company has continuously introduced high-end management and technical talents, and won the honorary title of "high-tech enterprise". Meanwhile, all the production processes are strictly controlled by ISO9001:2015 Quality Management System.

With headquarter established in Taiwan, we adopt Taiwan's advanced technology, have CNC lathe Frank operating system and CNC machining center Mitsubishi operating system production equipment. Our products are sold well all over the country and the world. We are serving thousands of customers in different fields.

Haoshou clamps and clamp cylinders are focus on the professional fixtures marketing, service and R&D for aircraft, automotive and industrial circles. We are strive to provide a stable, reliable and accurate tools for the Chinese manufacturing industry. Our company insists on customer first, keeps providing customers by a variety of choices with professional technology. In addition to all kinds of common clamps, we can also be customized according to customer requirements, and can design the best products for customer needs.




企業文化

企業精神 敬業、誠信、創新、團隊

企業戰略 創建具有活力持續發展的企業

企業目標 大膽改進、創新、發展、不斷推動工裝夾具及自動化裝備新領域的發展



優秀團隊
EXCELLENT TEAM

優秀團隊
EXCELLENT TEAM

团队合作 DARES TO CHALLENGE

合作 團結 發展 交流 共贏 没有完美的個人，祇有完美的團隊

COOPERATION UNITY

DEVELOPMENT EXCHANGE WIN-WIN

THERE IS NO SINGLE PERFECT PERSON,

ONLY PERFECT COLLECTIVE GROUPS

優秀的團隊和優良的企業文化
保證企業的健康持續發展



公司優秀團隊/Excellent Team Of The Company



年終表彰大會/Year End Commendation Meeting



銷售精英團隊/Sales Elite Team



專業性展會/Professional Exhibition



員工精彩表演/Excellent Performance Of Employees

產品目錄

PRODUCT LIST

垂直式夾鉗
VERTICAL HANDLE



01

水平式夾鉗
HORIZONTAL HANDLE



15-30

推拉式夾鉗
PUSH/PULL



31-42

門門式夾鉗
LATCH TYPE



43-49

擠壓式夾鉗
TOGGLE PLIERS



50-54

復合組立式夾鉗
HEAVY DUTY WELDABLES



55-59

小型F夾鉗
SMALL F CLAMPS



60

C型夾鉗
C-CLAMP



61

氣動夾鉗
AIR CLAMPS



62-66

夾緊氣缸
CLAMPING CYLINDER



67-68

F型夾鉗
F TYPE CLAMP



69-75

氣動剪刀
PNEUMATIC SCISSORS



76-78

直線導軌
LINEAR GUIDES



79

氮氣彈簧
GAS SPRING



80

可調式搪孔頭
ADJUSTABLE BORING HEAD



81

聯軸器
COUPLING



82

無油襯套
OIL-FREE BUSH



83

檢具配件
CHECKING ACCESSORIES



84

固定型金屬支腳
FIXED METAL FEET



85

三維柔性工作臺
THREE-DIMENSIONAL FLEXIBLE TABLE




86

 PAGE NO.	 PAGE NO.	 PAGE NO.	 PAGE NO.	 PAGE NO.	 PAGE NO.
HS-13005 1-1	HS-101-K 1-13	HS-26382 2-14	HS-305-HMY 3-10	HS-70305 7-1	HS-12132-A 10-1
HS-13007 1-1	HS-101-EL 1-13	HS-21385 2-15	HS-301-CR 3-11	HS-70310 7-1	HS-12265-A 10-1
HS-13008 1-1	HS-101-H 1-14	HS-21384 2-15	HS-301-CL 3-11	HS-70315 7-1	HS-12275-A 10-1
HS-13005-HB 1-1	HS-10648 1-14	HS-22384 2-15	HS-305-BM 3-11	HS-70505 7-1	HS-10247-A 10-2
HS-13005-SM 1-1	HS-290696 2-1	HS-200-W 2-16	HS-36330-ML 3-11	HS-70510 7-1	HS-10249-A 10-2
HS-13007-SM 1-1	HS-293229 2-1	HS-200-WLH 2-16	HS-302-CL 3-12	HS-70515 7-1	HS-20820-A 10-2
HS-12050 1-2	HS-290308 2-2	HS-20448 2-16	HS-302-CR 3-12	HS-70605 7-1	HS-20830-A 10-2
HS-12050-U80 1-2	HS-201 2-2	HS-301-AM 3-1	HS-36015-T 3-12	HS-70610 7-1	HS-36301-A 10-3
HS-12050-U120 1-2	HS-201-R 2-2	HS-301-BM 3-1	HS-304-HMY 3-12	HS-70615 7-1	HS-36003-A 10-3
HS-12085 1-2	HS-22100 2-3	HS-302-FM 3-1	HS-40360-ST 4-1	HS-70710 7-1	HS-36330-A 10-3
HS-12050-HB 1-2	HS-22115 2-3	HS-36092-M 3-1	HS-40323 4-2	HS-70715 7-1	HS-305-EA 10-3
HS-12050-SM 1-2	HS-201-B 2-3	HS-36003M 3-2	HS-431 4-2	HS-71210 7-1	HS-702-CA 10-4
HS-101-A 1-3	HS-201-BSI 2-3	HS-36010M 3-2	HS-40341 4-2	HS-71215 7-1	HS-702-DA 10-4
HS-101-AT 1-3	HS-201-BHB 2-4	HS-36012M 3-2	HS-40324 4-2	HS-72410 7-1	HS-702-KA 10-4
HS-12205 1-3	HS-201-BSM 2-4	HS-36067M 3-2	HS-40344 4-2	HS-72415 7-1	HS-30600HL-A 10-5
HS-12220 1-3	HS-225-D 2-4	HS-36068M 3-2	HS-40402 4-3	HS-75027 7-2	HS-31200HL-A 10-5
HS-12130 1-4	HS-225-DI 2-4	HS-36330M 3-3	HS-40702 4-3	HS-75027-SM 7-2	HS-32500HL-A 10-5
HS-12148 1-4	HS-225-DHB 2-5	HS-36202M 3-3	HS-40840 4-3	HS-75048 7-2	HS-30600PR-A 10-5
HS-12130-HB 1-4	HS-225-DSM 2-5	HS-36204M 3-3	HS-40870 4-3	HS-75078 7-2	HS-31200PR-A 10-5
HS-12130-SM 1-4	HS-20820 2-5	HS-36224M 3-3	HS-43101 4-4	HS-75088 7-2	HS-32500PR-A 10-5
HS-12265 1-5	HS-22165 2-6	HS-304-CM 3-4	HS-40200 4-4	HS-70320 7-3	HTK系列 11-1
HS-12300 1-5	HS-22200 2-6	HS-304-EM 3-4	HS-451 4-4	HS-70300T 7-3	F CLAMP 12-1
HS-12305 1-5	HS-22235 2-6	HS-304-HM 3-4	HS-452 4-4	HS-70300B 7-3	HS-13005-SS 1-1
HS-12320 1-5	HS-22250 2-6	HS-305-CM 3-4	HS-40371 4-4	HS-70720 7-3	HS-12050-SS 1-2
HS-10247 1-6	HS-20235 2-7	HS-305-EM 3-4	HS-43810 4-4	HS-70725 7-3	HS-12050-USS 1-2
HS-10250 1-6	HS-20236 2-7	HS-305-HM 3-4	HS-40370 4-5	HS-71220 7-3	HS-101-ASS 1-3
HS-101-J 1-6	HS-20752-B 2-7	HS-30509M 3-4	HS-40370-LP 4-5	HS-71225 7-3	HS-12130-SS 1-4
HS-101-JSI 1-6	HS-24502-B 2-7	HS-30510M 3-5	HS-40380 4-5	HS-72420 7-3	HS-12265-SS 1-5
HS-11002-B 1-7	HS-201-C 2-8	HS-30511M 3-5	HS-40390 4-5	HS-72425 7-3	HS-11421-SS 1-11
HS-11501-B70 1-7	HS-203-F 2-8	HS-30519M 3-5	HS-40391 4-5	HS-70533 7-3	HS-201-SS 2-2
HS-12002-C 1-7	HS-202-F 2-8	HS-30619M 3-5	HS-40392 4-5	HS-70200A 7-4	HS-201-ASS 2-2
HS-13002-B 1-7	HS-203-FL 2-8	HS-30600 3-6	HS-43110 4-6	HS-70730A 7-4	HS-201-BSS 2-3
HS-10751-B 1-7	HS-202-FL 2-8	HS-31200 3-6	HS-43120 4-6	HS-71230A 7-4	HS-225-DSS 2-4
HS-13502-B 1-7	HS-203-P 2-8	HS-32500 3-6	HS-43150 4-6	HS-70200B 7-4	HS-20235-SS 2-7
HS-13009 1-8	HS-204-G 2-9	HS-30600HL 3-6	HS-43160 4-6	HS-70730B 7-4	HS-20752-BSS 2-7
HS-14009 1-8	HS-204-GL 2-9	HS-31200HL 3-6	HS-40550 4-7	HS-71230B 7-4	HS-21502-BSS 2-7
HS-101-B 1-8	HS-204-GB 2-9	HS-32500HL 3-6	HS-40580 4-7	HS-72430A 7-4	HS-203-FSS 2-8
HS-102-B 1-9	HS-204-GBL 2-9	HS-30600PR 3-7	HS-60130 4-7	HS-72430B 7-4	HS-20800-SS 2-12
HS-101-D 1-9	HS-204-GBLH 2-9	HS-31200PR 3-7	HS-50350-1 5-1	HS-702-C 7-5	HS-21382-SS 2-14
HS-101-E 1-9	HS-22005 2-10	HS-32500PR 3-7	HS-50350 5-1	HS-70201 7-5	HS-301-AMSS 3-1
HS-101-DI 1-9	HS-22040 2-10	HS-36006 3-7	HS-50360 5-1	HS-702-D 7-5	HS-302-FMSS 3-1
HS-101-EI 1-9	HS-20400 2-10	HS-36070 3-7	HS-50380 5-1	HS-70203 7-5	HS-36092-MSS 3-1
HS-101-EU 1-10	HS-20100 2-11	HS-302-DM 3-8	HS-50385 5-2	HS-702-K 7-5	HS-36202-MSS 3-3
HS-101-EIU 1-10	HS-2300 2-11	HS-30282M 3-8	HS-50450 5-2	HS-701-C 7-5	HS-36204-MSS 3-3
HS-101-ED 1-10	HS-2301-B 2-11	HS-30290M 3-8	HS-50480 5-2	HS-70101 7-5	HS-36224-MSS 3-3
HS-101-EID 1-10	HS-2500 2-11	HS-30292M 3-8	HS-51105 5-2	HS-701-D 7-5	HS-304-EMSS 3-4
HS-11401 1-10	HS-2501-B 2-11	HS-36020M 3-8	HS-51106 5-3	HS-70103 7-5	HS-40323-SS 4-1
HS-12401 1-10	HS-2600 2-11	HS-36020-K 3-8	HS-51150 5-3	HS-701-K 7-5	HS-431M-SS 4-1
HS-11421 1-11	HS-2601-B 2-11	HS-31501 3-9	HS-51152 5-3	HS-80070 8-1	HS-40341-SS 4-1
HS-12421 1-11	HS-20800 2-12	HS-36060 3-9	HS-51151 5-3	HS-80325 8-1	HS-40324-SS 4-1
HS-11412 1-11	HS-21800 2-12	HS-303-EM 3-9	HS-51100 5-3	HS-80379 8-1	HS-40334-SS 4-1
HS-12412 1-11	HS-20300 2-12	HS-303-EMK 3-9	HS-51111 5-4	CCLAMP 9-1	HS-40344-SS 4-1
HS-14412 1-12	HS-21383 2-13	HS-30513 3-10	HS-511SP 5-4	HS-10101-A 10-1	HS-40402-SS 4-2
HS-13412 1-12	HS-25383 2-13	HS-30250 3-10	HS-51000 5-4	HS-12050-A 10-1	HS-451-SS 4-3
HS-10444 1-12	HS-21382 2-14	HS-30450 3-10	HS-51010 5-5	HS-12050-UA 10-1	HS-452-SS 4-3
HS-10448-Z 1-12	HS-22382 2-14	HS-305-CMT 3-10	HS-51020 5-5	HS-12130-A 10-1	HS-40380-SS 4-4
HS-10448-ZH 1-12	HS-25382 2-14	HS-304-EML 3-10	HS-51030 5-5		深喉式C型鉗 9-1

夾具螺絲等配件 13-1

精密機械配件 14-1

氣油壓缸系列 15-1

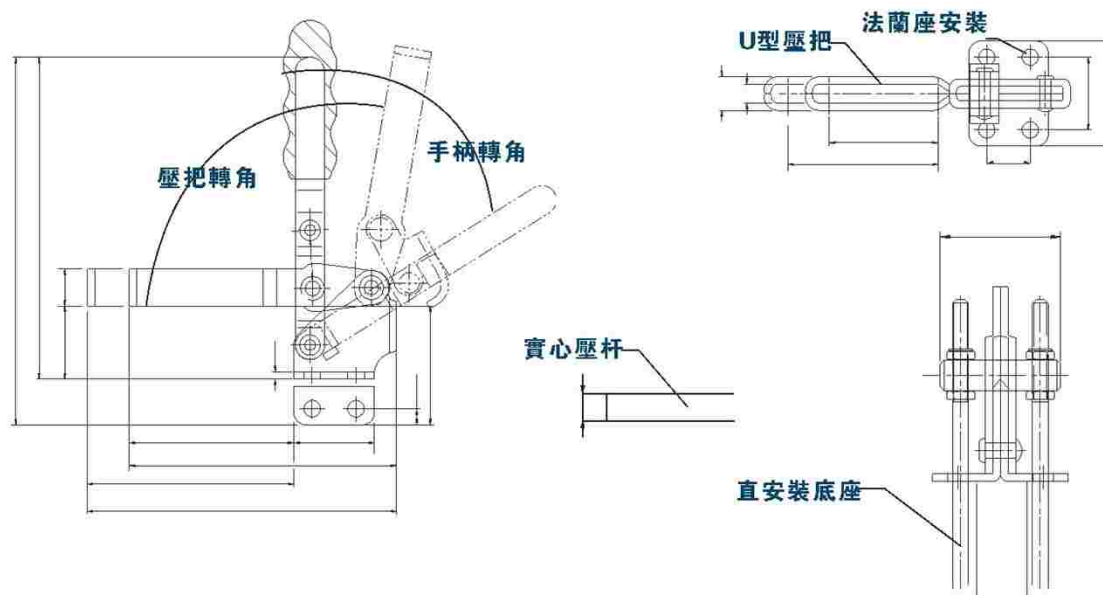

(快速夾鉗型錄)英漢對照

MODEL	型號
WEIGHT	自重
HOLDING CAPACITY	夾持力
SPINDLE SUPPLIED	壓頭螺絲型號
BAR OPENS	壓把開啓角度
HANDLE OPENS	手柄開啓角度
U--BAR	U型壓把
(LONG) SOLID BAR	(長)實心壓把
(SHORT) SOLID BAR	(短)實心壓把
OPEN BAR	開口壓把
HIGH BAR	高壓把
LOW BAR	低壓把
FLANGED BASE	法蘭底座
STRAIGHT BASE	直底座
LEFT HAND FLANGED BASE	左法蘭底座
RIGHT HAND FLANGED BASE	右法蘭底座
STRAIGHT HANDLE	直手柄
T-HANDIE	T型手柄
SIDE MOUNTED	側面法蘭安裝
PLUNGER STROKE	行程
FIXED SPINDLE	壓頭螺栓不能移的壓把
STAINLESS STEEL	不銹鋼
CYLINDER BORE	缸徑
CYLINDER AREA	氣缸面積
MAXIMUM CYLINDER AIR PRESSURE	氣缸最大的壓力
MAXMUM HOLDING CAPACITY	最大的夾持力

HS-13005 THRU HS-13008

- HS-13008 has
- Hardened bushings
- Removable ground pins.
(HS-13008) 产品转动关键部位装有耐磨套




HS-13005-T
HS-13007-T



HS-13005



HS-13007
HS-13008

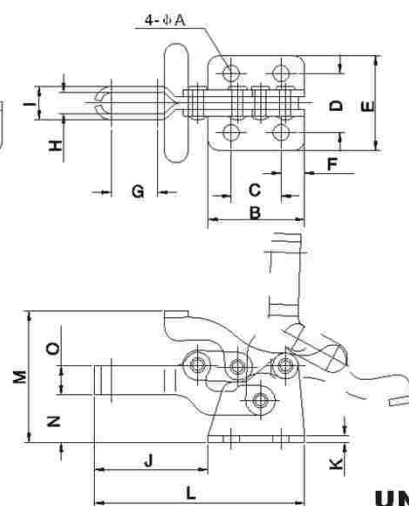

UNT:mm

MODEL	WEIGHT	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS	ØA	B	C	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
HS-13005(T)	60	68	HS-FC-10138	90°	170°	4.4	26.2	13.5	—	—	15.9	25.4	6.4	12.7	5.6	9	30.8	2	57	35.2	12.7	7.9
HS-13007	230	150	HS-FC-56212	90°	170°	7	44	—	19	27	29.4	46	10.3	19.5	8.8	14.8	50.1	3.0	93.7	58.7	22.2	12.7
HS-13008	630	320	HS-FC-38312	90°	170°	7.9	64.3	—	31	39	38.1	62.7	12.7	28.9	10.4	19	70.5	3.0	135	88.1	33.3	19
HS-13007-T	265	150	HS-FC-56212	90°	170°	7	44	23	—	—	29	46	10.5	19.5	9.4	15.4	50.1	3.0	93.7	58.7	22.2	12.7
HS-13005-SS	STAINLESS STEEL																					
HS-13007-SS	STAINLESS STEEL																					


HS-13005-HB AND HS-13005-SM AND HS-13007-SM





HS-13005-HB

UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS
HS-13005-HB	68	68	HS-FC-10138	90°	170°

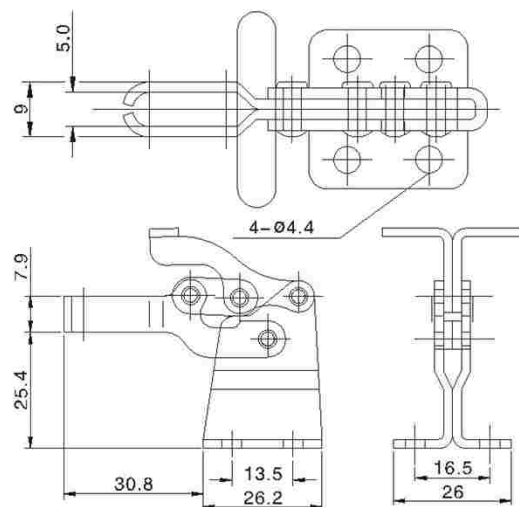

HS-13005-SM

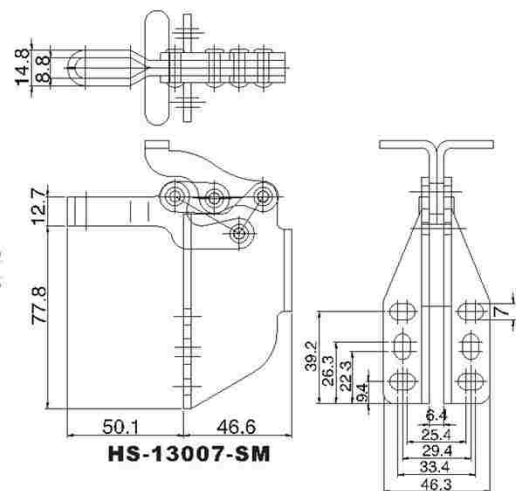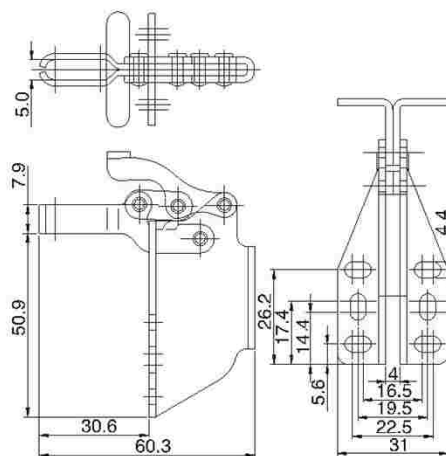

HS-13007-SM

UNT:mm


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS
HS-13005-SM	92	68	HS-FC-10138	90°	170°
HS-13007-SM	360	150	HS-FC-56212		

HS-12050 THRU HS-12085

- WEIGHT(自重): 170g
- HOLDING CAPACITY(夾持力): 91Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-FC-14134
- BAR OPENS(壓把開啓角度): 100°
- HANDLE OPENS(手柄開啓角度): 60°

UNT:mm

MODEL	DESCRIPTION
HS-12050	FIXED SPINDLE, FLANGED BASE, STRAIGHT HANDLE
HS-12055	FIXED SPINDLE, STRAIGHT BASE, STRAIGHT HANDLE
HS-12060	SOLID BAR, FLANGED BASE, STRAIGHT HANDLE
HS-12065	SOLID BAR, STRAIGHT BASE, STRAIGHT HANDLE
HS-12070	FIXED SPINDLE, FLANGED BASE, T-HANDLE
HS-12075	FIXED SPINDLE, STRAIGHT BASE, T-HANDLE
HS-12080	SOLID BAR, FLANGED BASE, T-HANDLE
HS-12085	SOLID BAR, STRAIGHT BASE, T-HANDLE
HS-12050-U	U-BAR, FLANGED BASE, STRAIGHT HANDLE
HS-12055-U	U-BAR, STRAIGHT BASE, STRAIGHT HANDLE
HS-12050-U80	80mm U-BAR, FLANGED BASE, STRAIGHT HANDLE
HS-12050-U120	120mm U-BAR, FLANGED BASE, STRAIGHT HANDLE
HS-12050-SS	STAINLESS STEEL
HS-12050-US	STAINLESS STEEL

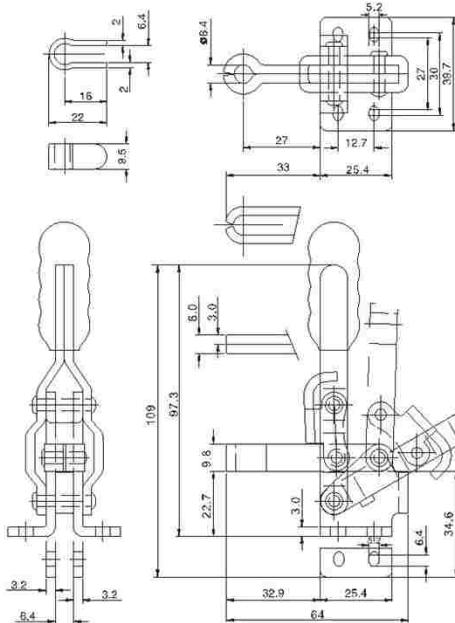

HS-12050




HS-12050-USS




HS-12050-HB THRU HS-12050-SM





HS-12050-HB

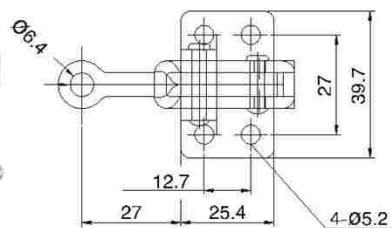

HS-12050-SM

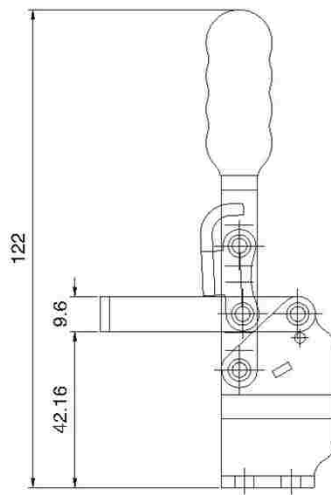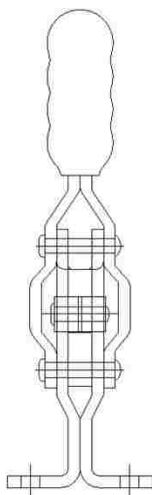


UNT:mm

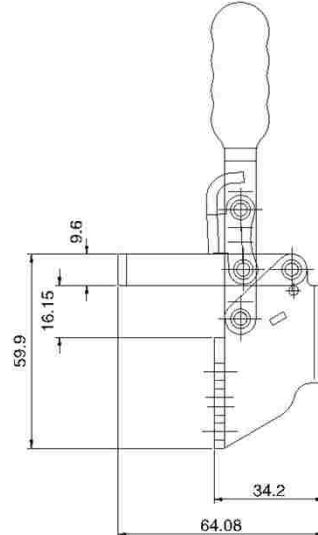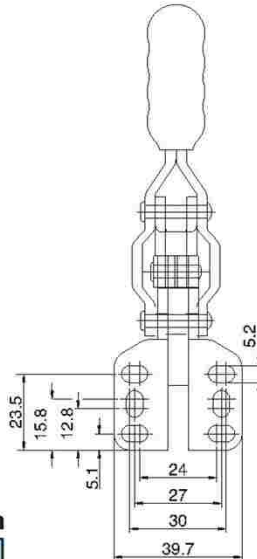

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS
HS-12050-HB	186	91	HS-FC-14134	100"	60"
HS-12050-SM					

HS-101-A THRU HS-101-AT


- WEIGHT(自重): 60g
- HOLDING CAPACITY(夾持力): 50Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-10138
- BAR OPENS(壓把開啓角度): 100°
- HANDLE OPENS(手柄開啓角度): 56°

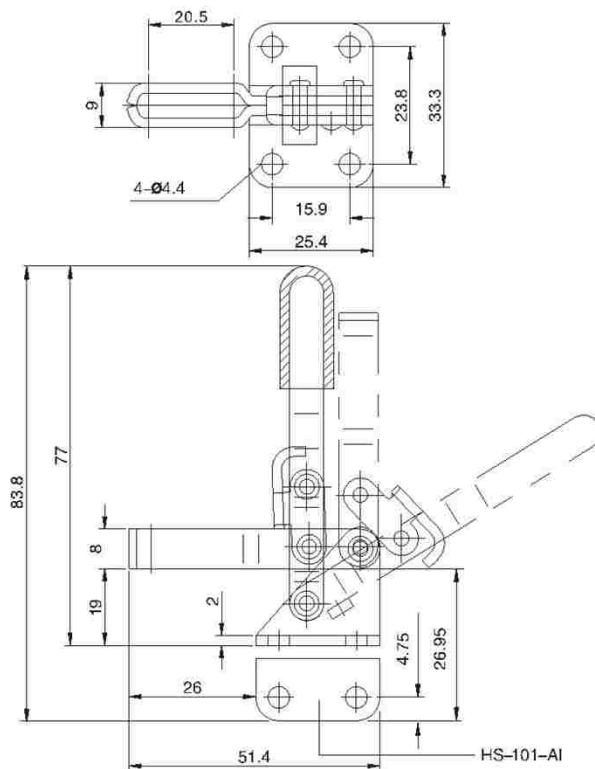**HS-101-A****UNT:mm**

MODEL	DESCRIPTION
HS-101-A	U-BAR, FLANGED BASE, STRAIGHT HANDLE U型壓把, 法蘭底座, 直手柄
HS-101-AI	U-BAR, STRAIGHT BASE, STRAIGHT HANDLE U型壓把, 直底座, 直手柄
HS-101-AIT	U-BAR, STRAIGHT BASE, T-HANDLE U型壓把, 直底座, T型手柄
HS-101-AT	U-BAR, FLANGED BASE, T-HANDLE U型壓把, 法蘭底座, T型手柄
HS-101-ASS	STAINLESS STEEL 不銹鋼

HS-12205 THRU HS-12220

- WEIGHT(自重): 620g
- HOLDING CAPACITY(夾持力): 182Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- BAR OPENS(壓把開啓角度): 101°
- HANDLE OPENS(手柄開啓角度): 57°

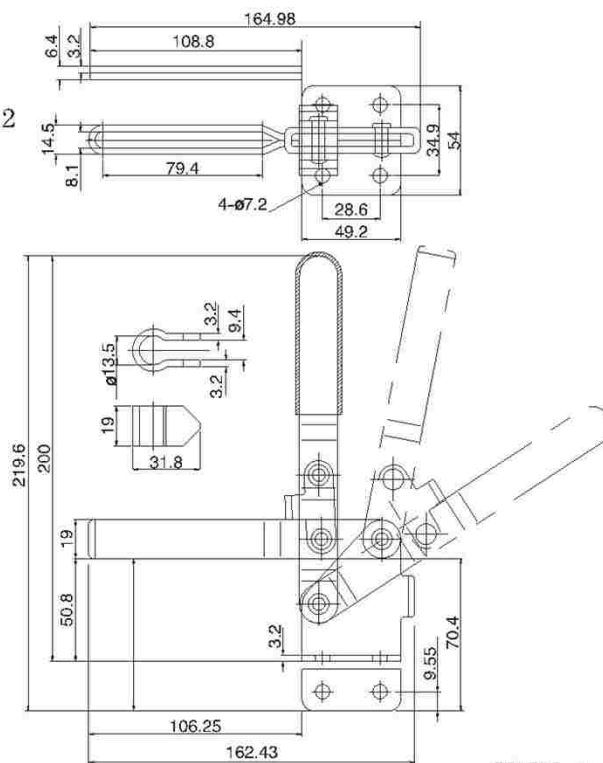**HS-12205****UNT:mm**


MODEL	DESCRIPTION
HS-12205	U-BAR, FLANGED BASE U型壓把, 法蘭底座
HS-12210	U-BAR, STRAIGHT BASE U型壓把, 直底座
HS-12215	SOLID BAR, FLANGED BASE 實心壓把, 法蘭底座
HS-12220	SOLID BAR, STRAIGHT BASE 實心壓把, 直底座

HS-12130 THRU HS-12148

- HOLDING CAPACITY(夾持力): 227Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- BAR OPENS(壓把開啓角度): 100°
- HANDLE OPENS(手柄開啓角度): 60°




HS-12130

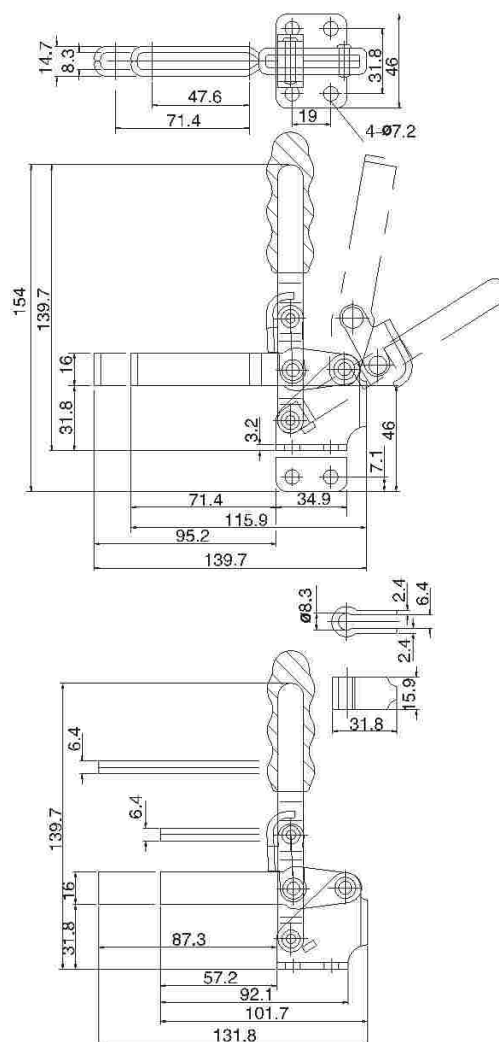


UNT:mm		
MODEL	DESCRIPTION	WEIGHT(g)
HS-12130	SHORT U-BAR,FLANGED BASE,STRAIGHT HANDLE	355
HS-12131	SHORT U-BAR,FLANGED BASE,T-HANDLE	370
HS-12132	LONG U-BAR,FLANGED BASE,STRAIGHT HANDLE	370
HS-12133	LONG U-BAR,FLANGED BASE,T-HANDLE	400
HS-12135	SHORT U-BAR,STRAIGHT BASE,STRAIGHT HANDLE	355
HS-12136	SHORT U-BAR,STRAIGHT BASE,T-HANDLE	370
HS-12137	LONG U-BAR,STRAIGHT BASE,STRAIGHT HANDLE	370
HS-12138	LONG U-BAR,STRAIGHT BASE,T-HANDLE	400
HS-12140	SHORT SOLID BAR,FLANGED BASE,STRAIGHT HANDLE	340
HS-12141	SHORT SOLID BAR,FLANGED BASE,T-HANDLE	355
HS-12142	LONG SOLID BAR,FLANGED BASE,STRAIGHT HANDLE	355
HS-12143	LONG SOLID BAR,FLANGED BASE,T-HANDLE	375
HS-12145	SHORT SOLID BAR,STRAIGHT BASE,STRAIGHT HANDLE	340
HS-12146	SHORT SOLID BAR,STRAIGHT BASE,T-HANDLE	355
HS-12147	LONG SOLID BAR,STRAIGHT BASE,STRAIGHT HANDLE	355
HS-12148	LONG SOLID BAR,STRAIGHT BASE,T-HANDLE	375
HS-12130-SS	STAINLESS STEEL	

HS-12130-HB AND HS-12130-SM

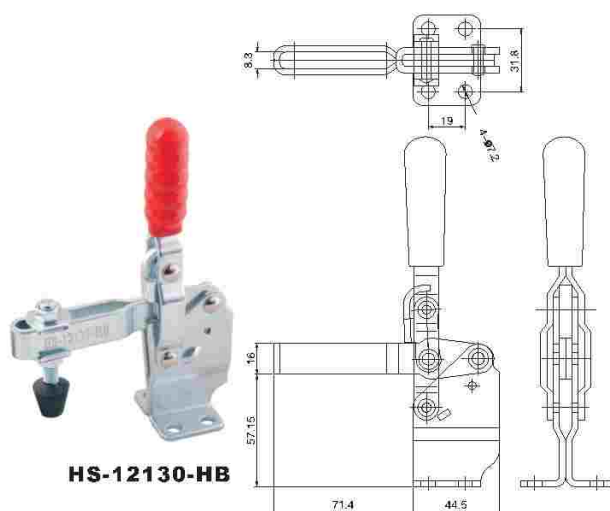

HS-12130-HB

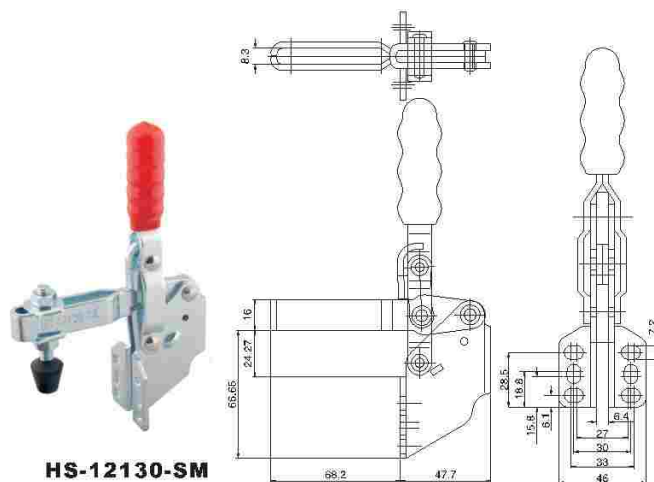

HS-12130-SM

UNT:mm					
MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS
HS-12130-HB	401	227	HS-FC-56212	100°	60°
HS-12130-SM	395				

HS-12265 THRU HS-12300


- Hardened bushings Removable ground pins.
(产品转动关键部位装有耐磨套)
- HOLDING CAPACITY(夾持力): 340Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-FC-38312
- BAR OPENS(壓把開啓角度): 105°
- HANDLE OPENS(手柄開啓角度): 58°



HS-12265

UNT:mm

MODEL	DESCRIPTION	WEIGHT(g)
HS-12265	U-BAR, FLANGED BASE, STRAIGHT HANDLE	635
HS-12270	U-BAR, STRAIGHT BASE, STRAIGHT HANDLE	635
HS-12275	SOLID BAR, FLANGED BASE, STRAIGHT HANDLE	680
HS-12280	SOLID BAR, STRAIGHT BASE, STRAIGHT HANDLE	680
HS-12285	U-BAR, FLANGED BASE, T-HANDLE	710
HS-12290	U-BAR, STRAIGHT BASE, T-HANDLE	710
HS-12295	SOLID BAR, FLANGED BASE, T-HANDLE	735
HS-12300	SOLID BAR, STRAIGHT BASE, T-HANDLE	735
HS-12265-SS	STAINLESS STEEL	

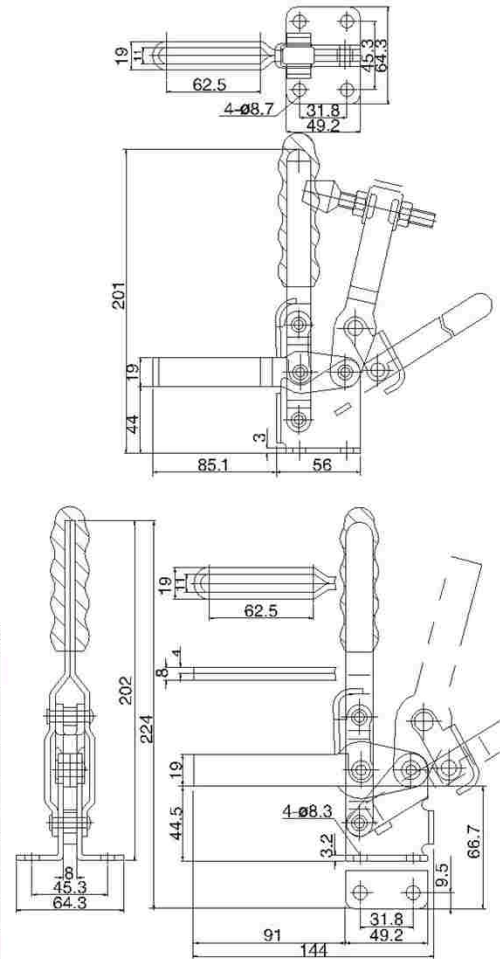

HS-12305 THRU HS-12320


- WEIGHT(自重): 990g
- HOLDING CAPACITY(夾持力): 364Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-38312
- BAR OPENS(壓把開啓角度): 100°
- HANDLE OPENS(手柄開啓角度): 65°



HS-12305

UNT:mm

MODEL	DESCRIPTION	
HS-12305	OPEN BAR, FLANGED BASE	開口壓把, 法蘭底座
HS-12310	OPEN BAR, STRAIGHT BASE	開口壓把, 直底座
HS-12315	SOLID BAR, FLANGED BASE	實心壓把, 法蘭底座
HS-12320	SOLID BAR, STRAIGHT BASE	實心壓把, 直底座

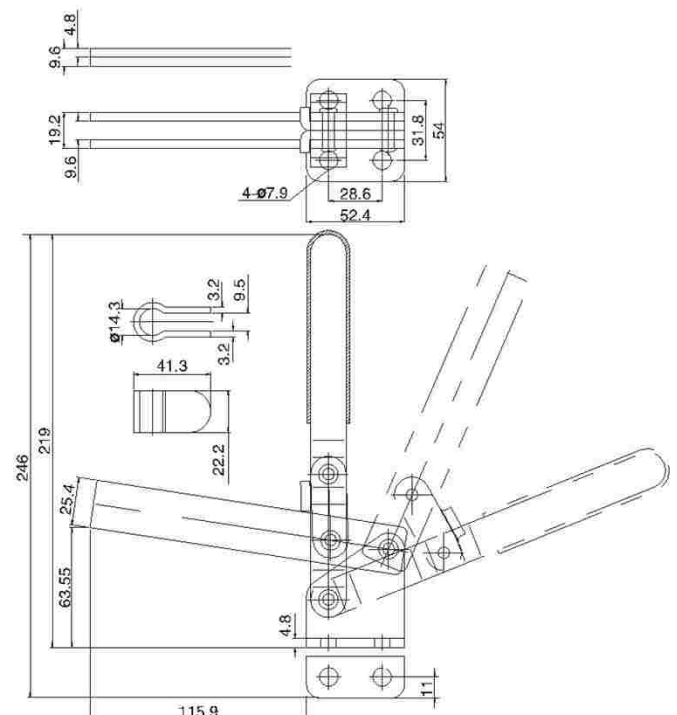


HS-10247 THRU HS-10250

- Hardened bushings Removable ground pins.
(产品转动关键部位装有耐磨套)
- WEIGHT(自重): 1250g
- HOLDING CAPACITY(夾持力): 450Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-12300
- BAR OPENS(壓把開啓角度): 100-135°
- HANDLE OPENS(手柄開啓角度): 58°-70°



HS-10247

MODEL	DESCRIPTION
HS-10247	U-BAR, FLANGED BASE U型壓把, 法蘭底座
HS-10248	U-BAR, STRAIGHT BASE U型壓把, 直底座
HS-10249	SOLID BAR, FLANGED BASE 實心壓把, 法蘭底座
HS-10250	SOLID BAR, STRAIGHT BASE 實心壓把, 直底座

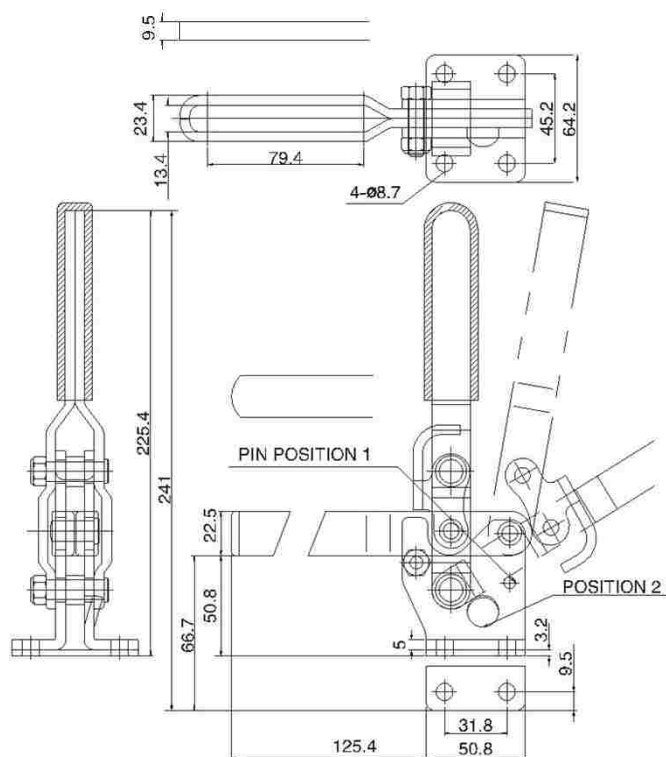


UNT:mm

HS-101-J THRU HS-101-JSI

- Hardened bushings Removable ground pins.
(产品转动关键部位装有耐磨套)
- WEIGHT(自重): 2540g
- HOLDING CAPACITY(夾持力): 550Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-58500
- BAR OPENS(壓把開啓角度): 100-140°
- HANDLE OPENS(手柄開啓角度): 48-60°



HS-101-J

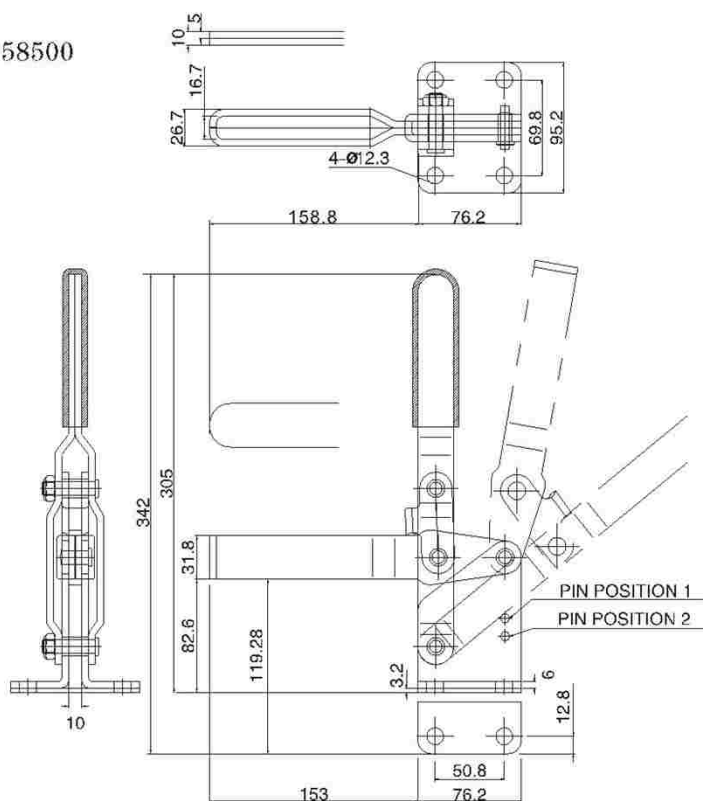


UNT:mm

MODEL	DESCRIPTION
HS-101-J	U-BAR, FLANGED BASE U型壓把, 法蘭底座
HS-101-JS	SOLID BAR, FLANGED BASE 實心壓把, 法蘭底座
HS-101-JSB	U-BAR, STRAIGHT BASE U型壓把, 直底座
HS-101-JSI	SOLID BAR, STRAIGHT BASE 實心壓把, 直底座

HS-11002-B THRU HS-13002-B

- HS-13002-B has
 - Hardened bushings**
 - Removable ground pins.**
- 产品转动关键部位装有耐磨套

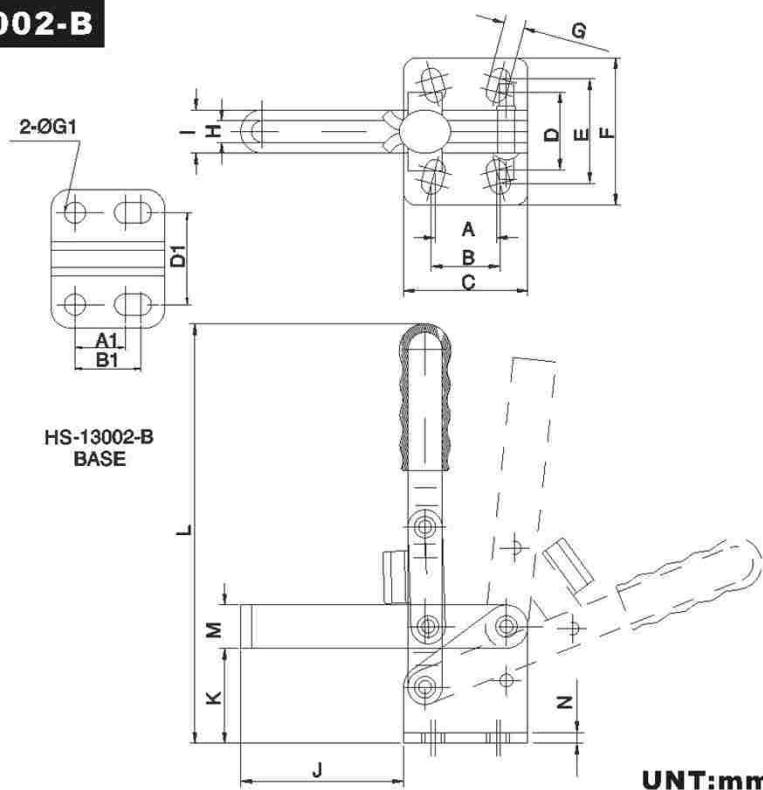
**HS-13002-B**

UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS	A	A1	B	B1	C	D	D1	E	F	ØG1	G	H	I	J	K	L	M	N
HS-11002-B	128	75	HS-SA-054008	96°	69°	14.0	-	16	-	29	17.5	-	24.2	34	-	4.8	5	10	38	22	97	10	2.5
HS-12002-B	170	150	HS-SA-065010	108°	70°	12.7	-	19	-	35	25	-	27	42	-	5.5	6.4	11	44	29	143	13	3
HS-13002-B	380	250	HS-SA-086512	108°	67°	-	19	-	25	43	-	34.4	-	51.1	8	-	8.8	12	100	35	196	19	3

HS-10751-B THRU HS-13502-B

MODEL	A	B	C	C1	ØD	E	F	G	G1	H	H1	I	J	K	L	L1
HS-10751-B	-	-	5.5	-	4.4	16	26	31	-	27.6	9	5	4	-	9.8	-
HS-10752-B	24	34	5.5	-	4.4	16	26	31	-	16	-	9	-	4	86.5	-
HS-11501-B	-	-	6.2	-	5.1	12.7	27	43	-	33.4	11	5.4	5.8	-	135	-
HS-11501-B70	-	-	6.2	-	5.1	12.7	27	75	-	33.4	11	5.4	5.8	-	135	-
HS-11501-C	-	-	6.2	-	5.1	12.7	27	-	33	33.4	11	5.4	5.8	-	135	-
HS-11502-B	26.8	37.8	6.2	-	5.1	12.7	27	43	-	23	-	11	5.4	5.8	123	-
HS-11502-C	26.8	37.8	-	6.2	5.1	12.7	27	-	33	23	-	11	5.4	5.8	123	-
HS-12501-B	-	-	8.9	-	7.1	19	35	75	-	46	17.5	7	6	-	190	-
HS-12501-C	-	-	8.4	7.1	19	35	-	53	-	46	17.5	7	6	-	190	-
HS-12502-B	32	47	8.9	-	7.1	19	35	75	-	32	-	17.5	7	6	175	-
HS-12502-C	32	47	-	8.4	7.1	19	35	-	53	32	-	17.5	7	6	175	-
HS-13501-B	-	-	10.6	-	8.3	32	50	95	-	63.6	22	9.6	8	-	240	-
HS-13502-B	45	64	10.6	-	8.3	32	50	95	-	43	-	22	9.6	8	220	-

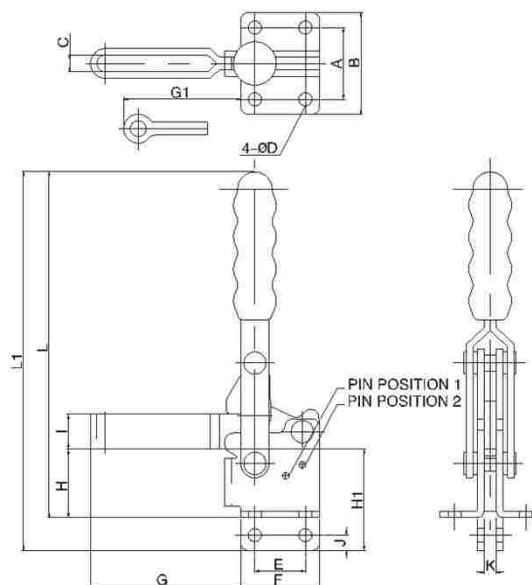


UNT:mm

MODEL	WEIGHT (g)	HOLDING CAPACITY (kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS	DESCRIPTION
HS-10751-B	50	75	HS-SA-055008	130°-195°	90°-125°	U-BAR, STRAIGHT BASE
HS-10752-B						U-BAR, FLANGED BASE
HS-11501-B						U-BAR, STRAIGHT BASE
HS-11501-C	150	150	HS-SA-065010	95°-185°	75°-110°	FIXED SPINDLE, STRAIGHT BASE
HS-11502-B						U-BAR, FLANGED BASE
HS-11502-C						FIXED SPINDLE, FLANGED BASE
HS-12501-B	380	250	HS-SA-085012	90°-150°	70°-100°	U-BAR, STRAIGHT BASE
HS-12501-C						FIXED SPINDLE, STRAIGHT BASE
HS-12502-B						U-BAR, FLANGED BASE
HS-12502-C	800	350	HS-SA-108015	90°-180°	70°-100°	FIXED SPINDLE, FLANGED BASE
HS-13501-B						U-BAR, STRAIGHT BASE
HS-13502-B						U-BAR, FLANGED BASE

**HS-11502-B****HS-11502-C**

HS-13009 AND HS-14009

- WEIGHT(自重): 40g
- HOLDING CAPACITY(夾持力): 30Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-044207
- BAR OPENS(壓把開啓角度): 80°
- HANDLE OPENS(手柄開啓角度): 88°

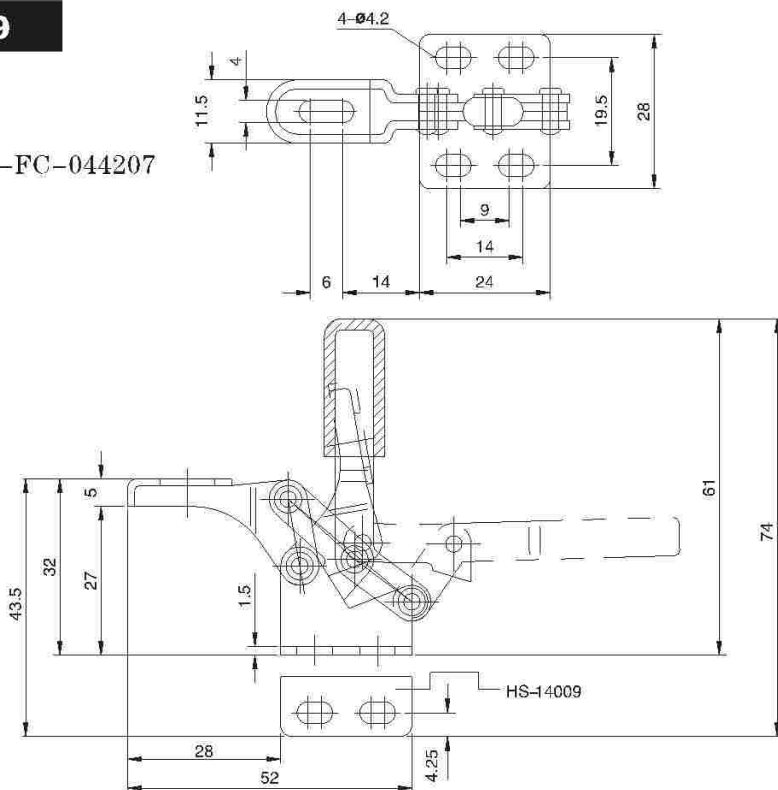
**HS-13009**

MODEL	DESCRIPTION
HS-13009	FLANGED BASE 法蘭底座
HS-14009	STRAIGHT BASE 直底座

UNT:mm

HS-101-B


- WEIGHT(自重): 135g
- HOLDING CAPACITY(夾持力): 100Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-14134
- BAR OPENS(壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 65°

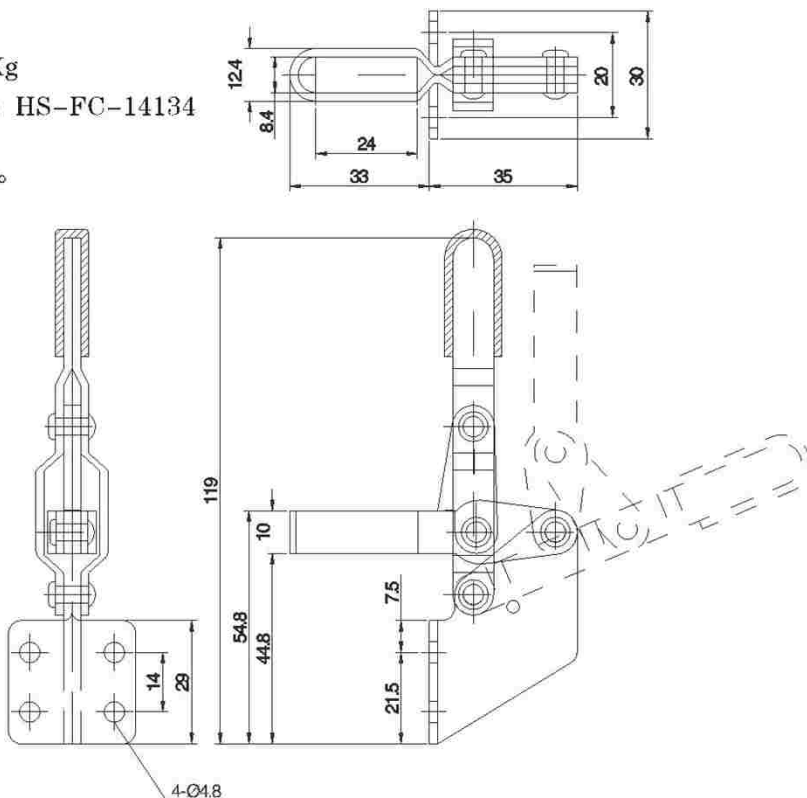**HS-101-B**

UNT:mm

HS-102-B


- WEIGHT(自重): 115g
- HOLDING CAPACITY(夾持力): 100Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-14134
- BAR OPENS(壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 65°

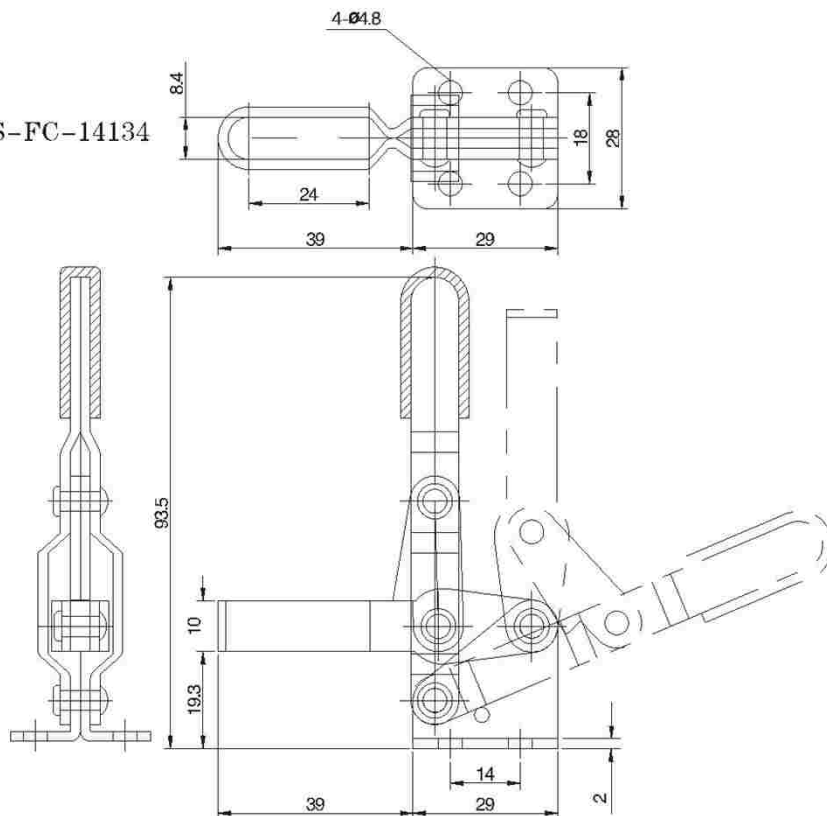**HS-102-B**

UNT:mm

HS-101-D AND HS-101-E**HS-101-DI AND HS-101-EI**

- HOLDING CAPACITY(夾持力): 180Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- BAR OPENS(壓把開啓角度): 100°
- HANDLE OPENS(手柄開啓角度): 60°

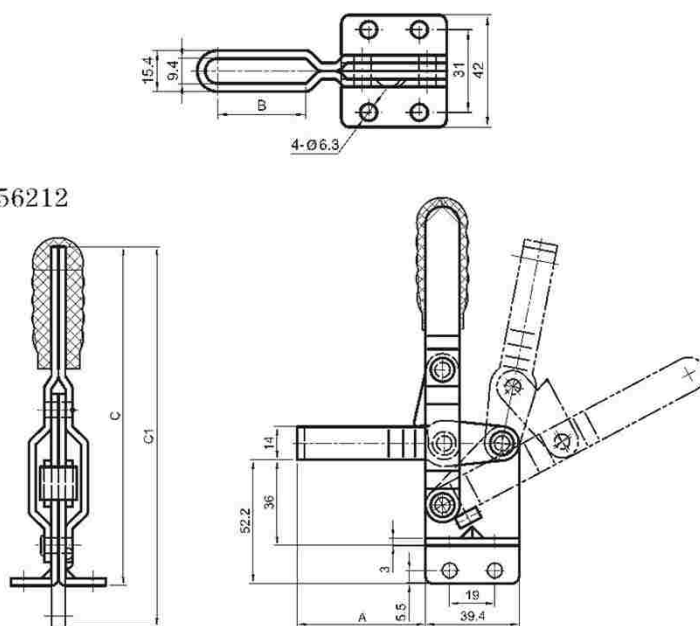
**HS-101-D**

UNT:mm

MODEL	DESCRIPTION	WEIGHT (g)	A	B	C	C1
HS-101-D	U-BAR, FLANGED BASE, STRAIGHT HANDLE	330	54	32.7	145	-
HS-101-D-15	LONG U-BAR, FLANGED BASE, STRAIGHT HANDLE	412	154	132.7	145	-
HS-101-DI	U-BAR, STRAIGHT BASE, STRAIGHT HANDLE	330	54	32.7	-	159
HS-101-DI-15	LONG U-BAR, STRAIGHT BASE, STRAIGHT HANDLE	412	154	132.7	-	159
HS-101-E	LONG U-BAR, FLANGED BASE, STRAIGHT HANDLE	380	104	82.7	145	-
HS-101-E-20	LONG U-BAR, FLANGED BASE, STRAIGHT HANDLE	440	204	182.7	145	-
HS-101-EI	LONG U-BAR, STRAIGHT BASE, STRAIGHT HANDLE	380	104	82.7	-	159
HS-101-EI-20	LONG U-BAR, STRAIGHT BASE, STRAIGHT HANDLE	440	204	182.7	-	159
HS-101-DL	U-BAR, FLANGED BASE, LONG HANDLE	350	54	32.7	182	-

HS-101-EU AND HS-101-EIU**HS-101-ED AND HS-101-EID**

- WEIGHT(自重): 374g
- HOLDING CAPACITY(夾持力): 150Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- BAR OPENS(壓把開啓角度): 100°
- HANDLE OPENS(手柄開啓角度): 60°

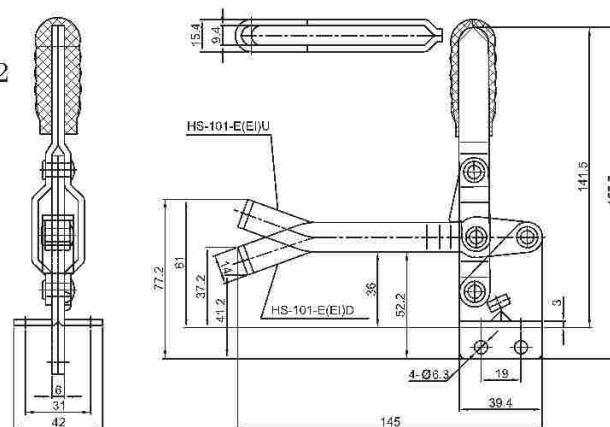
**HS-101-EID**

UNT:mm

MODEL	DESCRIPTION
HS-101-EU	CURVE UP U-BAR, FLANGED BASE, STRAIGHT HANDLE
HS-101-ED	CURVE DOWN U-BAR, FLANGED BASE, STRAIGHT HANDLE
HS-101-EIU	CURVE UP U-BAR, STRAIGHT BASE, STRAIGHT HANDLE
HS-101-EID	CURVE DOWN U-BAR, STRAIGHT BASE, STRAIGHT HANDLE

HS-11401 AND HS-12401

- WEIGHT(自重): 200g
- HOLDING CAPACITY(夾持力): 100Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-064010
- BAR OPENS(壓把開啓角度): 95°
- HANDLE OPENS(手柄開啓角度): 65°

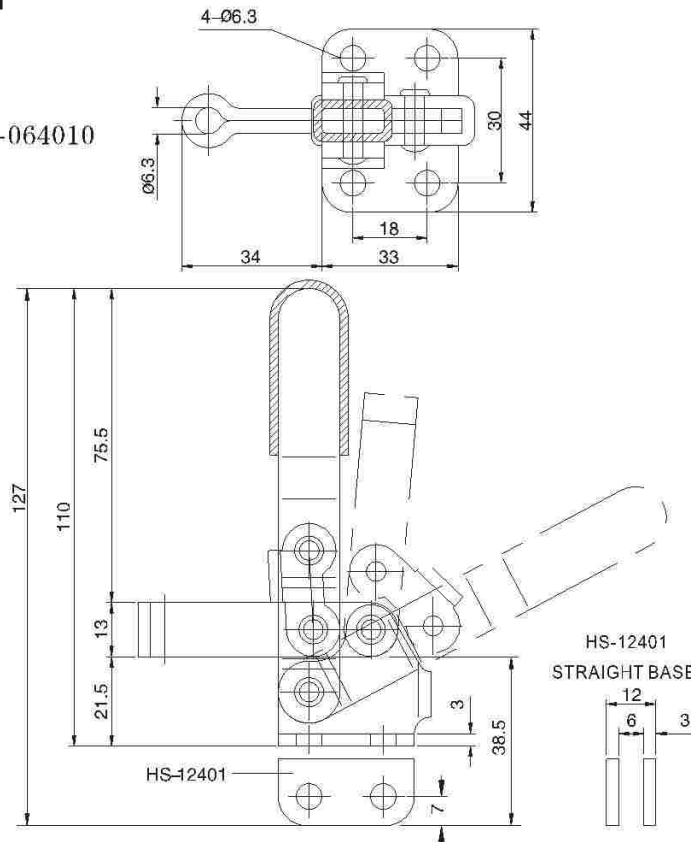**HS-11401**

UNT:mm


MODEL	DESCRIPTION
HS-11401	FLANGED BASE 法蘭底座
HS-12401	STRAIGHT BASE 直底座

HS-11421 AND HS-12421


- WEIGHT(自重): 370g
- HOLDING CAPACITY(夾持力): 200Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-085012
- BAR OPENS(壓把開啓角度): 94°
- HANDLE OPENS(手柄開啓角度): 45°

**HS-11421**

MODEL	DESCRIPTION
HS-11421	FLANGED BASE 法蘭底座
HS-12421	STRAIGHT BASE 直底座
HS-11421-SS	STAINLESS STEEL 不銹鋼

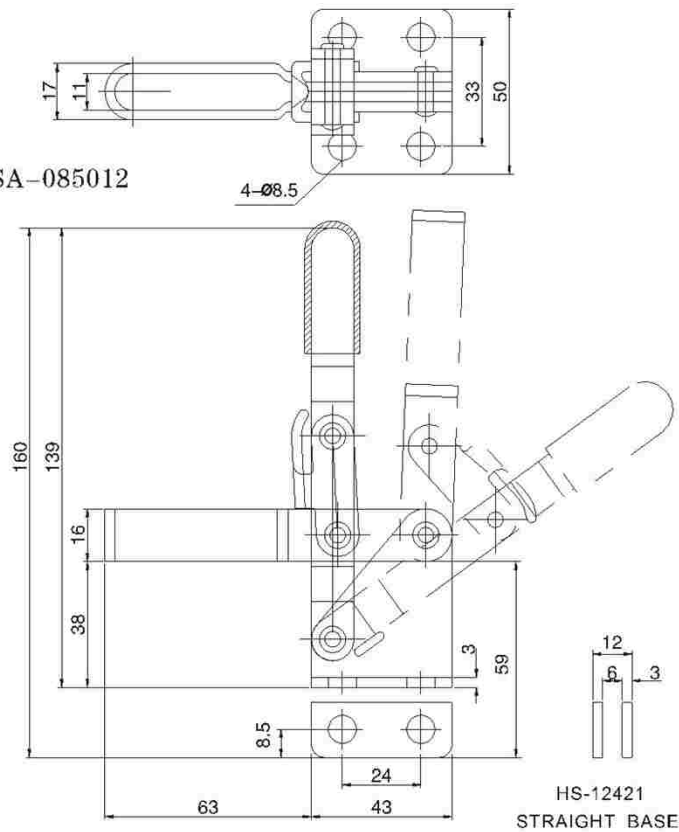**HS-12421
STRAIGHT BASE****UNT:mm****HS-11412 AND HS-12412**

- WEIGHT(自重): 370g
- HOLDING CAPACITY(夾持力): 200Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-085012
- BAR OPENS(壓把開啓角度): 110°
- HANDLE OPENS(手柄開啓角度): 64°

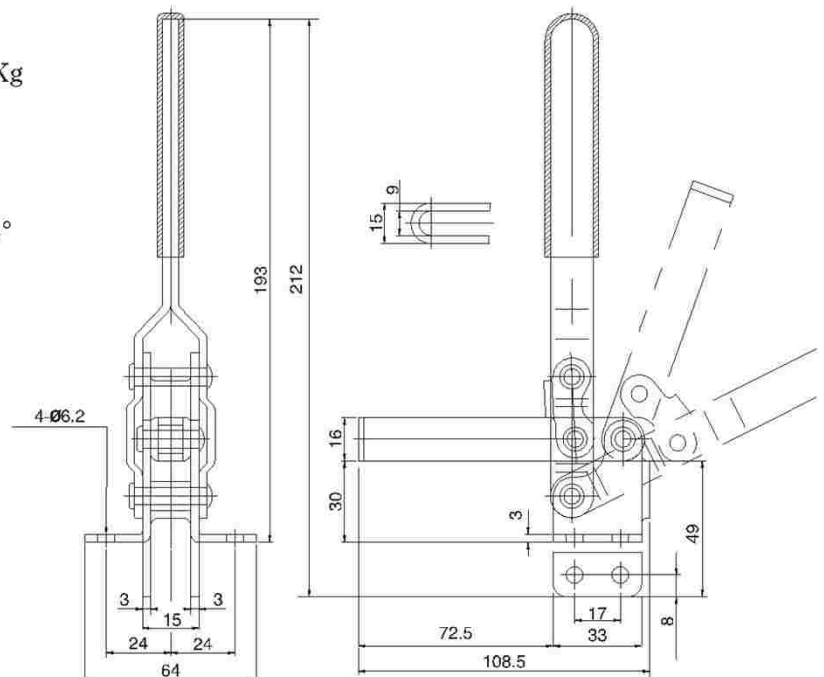**HS-11412****UNT:mm**


MODEL	DESCRIPTION
HS-11412	FLANGED BASE 法蘭底座
HS-12412	STRAIGHT BASE 直底座

HS-14412 AND HS-13412

- WEIGHT(自重): 1140g
- HOLDING CAPACITY(夾持力): 300Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-109015
- BAR OPENS(壓把開啓角度): 140°
- HANDLE OPENS(手柄開啓角度): 67°



HS-14412

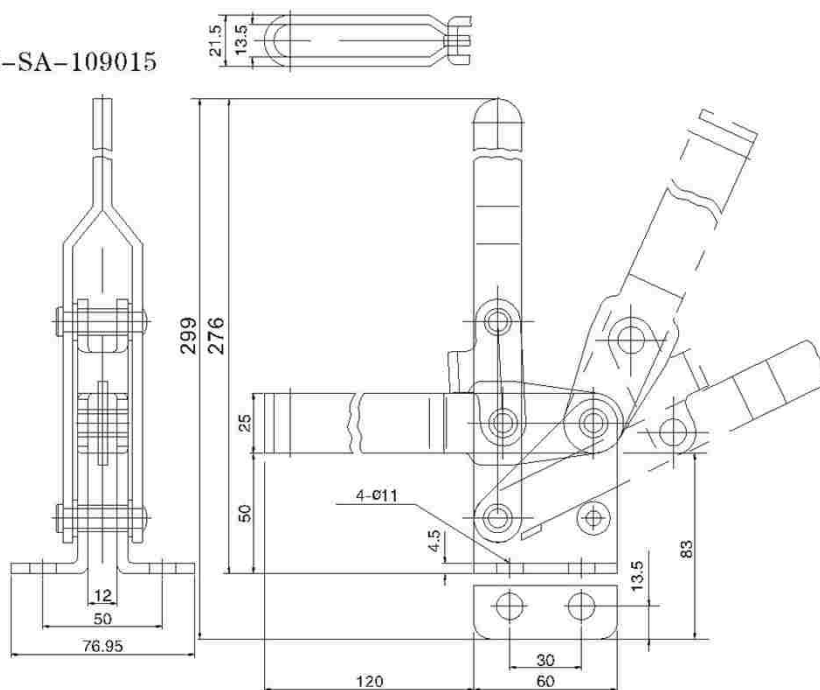

UNT:mm

MODEL	DESCRIPTION
HS-14412	FLANGED BASE 法蘭底座
HS-13412	STRAIGHT BASE 直底座

HS-10444 THRU HS-10448-ZH




- HOLDING CAPACITY(夾持力): 400Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-38200
- BAR OPENS(壓把開啓角度): 129°
- HANDLE OPENS(手柄開啓角度): 75.5°



HS-10448-Z



HS-10448-ZH

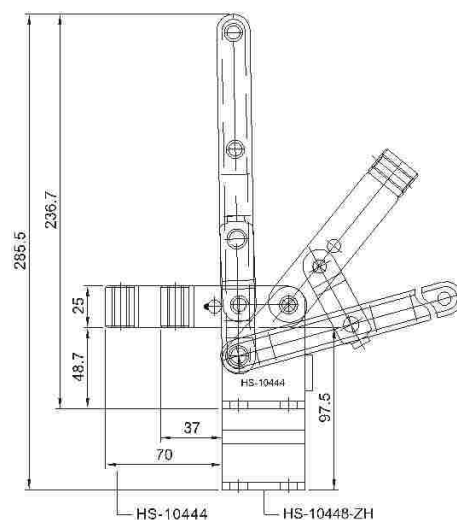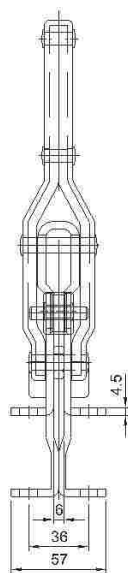

UNT:mm




MODEL	DESCRIPTION	WEIGHT(g)
HS-10444	LONG BAR, FLANGED BASE	870
HS-10448-Z	SHORT BAR, FLANGED BASE	840
HS-10448-ZH	SHORT BAR, HIGH FLANGED BASE	1000

HS-101-K

- HOLDING CAPACITY(夾持力): 500Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-128017
- ※ Pu发泡 (汽车椅垫) 材专用
- ※ 底座可特制

**HS-101-KS**

HS-101-K
HS-101-KS

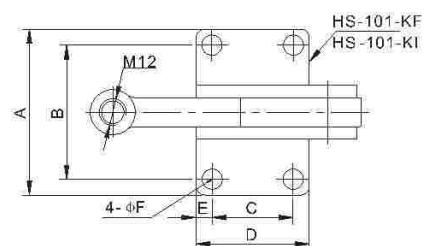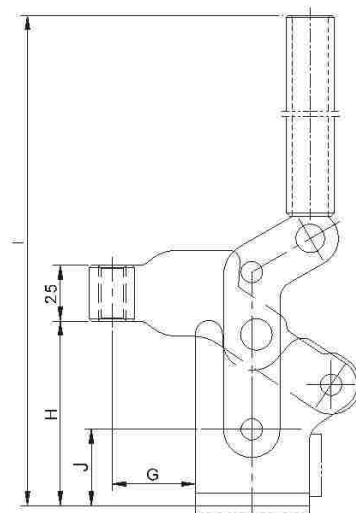
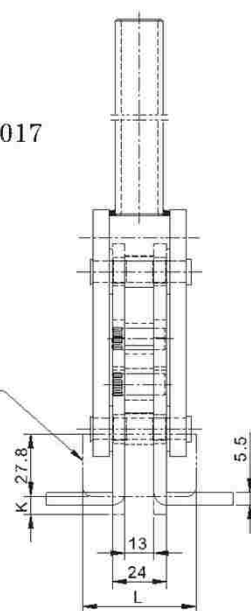


MODEL	WEIGHT(g)	A	B	C	D	E	φF	G	H	I	J	K	L
HS-101-K	1730	-	-	-	50.5	-	-	36.1	82.8	288	40.3	0	50.5
HS-101-KI	1680	68	44	44	68	14.5	9	28.6	64.5	270	22	-	-
HS-101-KF	1730	84	69.6	36	50.5	7.25	9	36.1	80.5	285	38	-	-
HS-101-KS	1730	-	-	-	50.5	-	-	36.1	80.5	285	38	8	50.5

UNT:mm

HS-101-EL


- WEIGHT(自重): 838g
- HOLDING CAPACITY(夾持力): 360Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-38312
- BAR OPENS(壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 60°

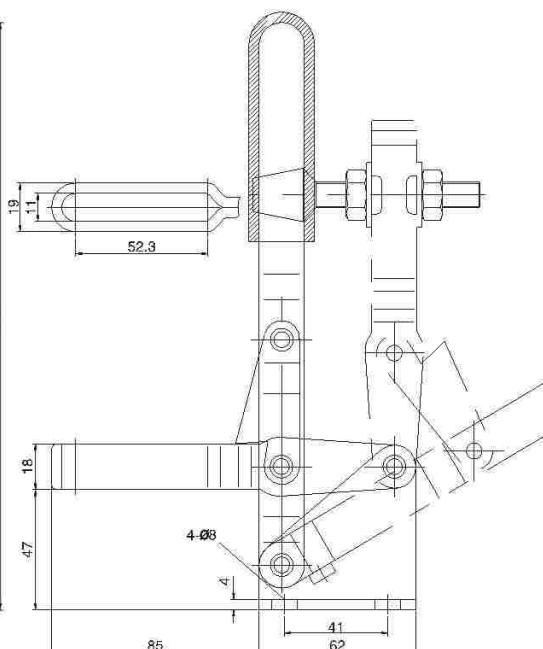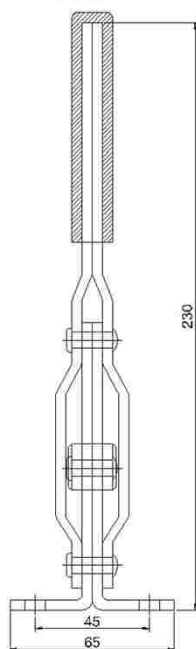**HS-101-EL**


UNT:mm

HS-101-H

- WEIGHT(自重): 1220g
- HOLDING CAPACITY(夾持力): 450Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-12300
- BAR OPENS(壓把開啓角度): 101°
- HANDLE OPENS(手柄開啓角度): 63°

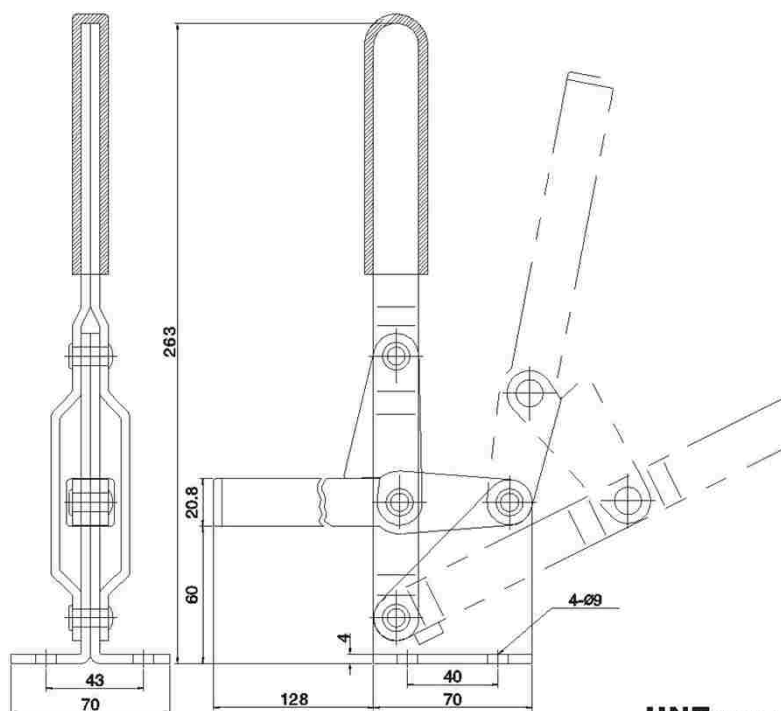
**HS-101-H****UNT:mm****HS-10648**

- WEIGHT(自重): 1310g
- HOLDING CAPACITY(夾持力): 450Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-125017
- BAR OPENS(壓把開啓角度): 67.5°
- HANDLE OPENS(手柄開啓角度): 60°

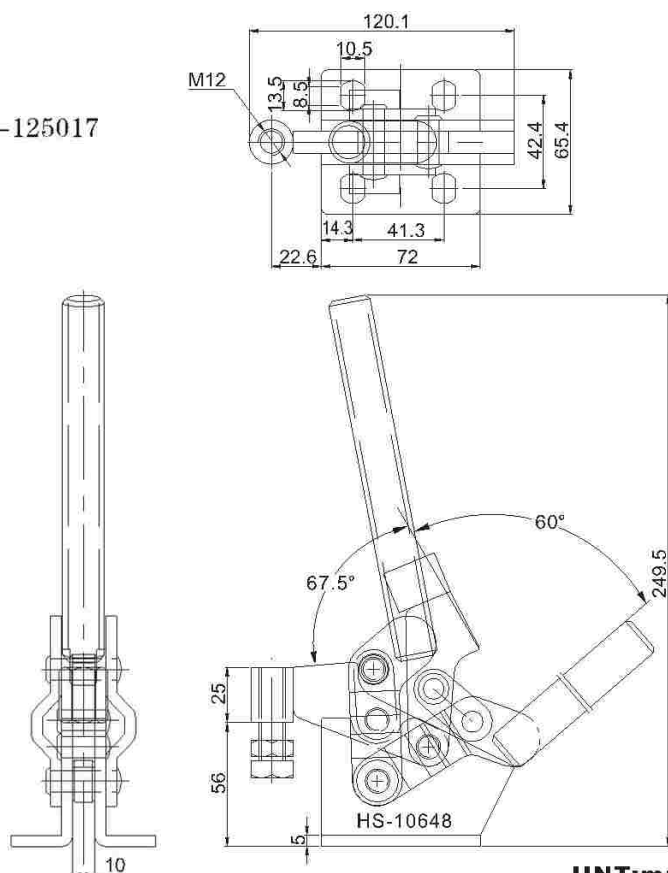
**HS-10648****UNT:mm**

HS-293229

- WEIGHT(自重): 185g
- HOLDING CAPACITY(夾持力): 105kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-065110
- BAR OPENS (壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 68°

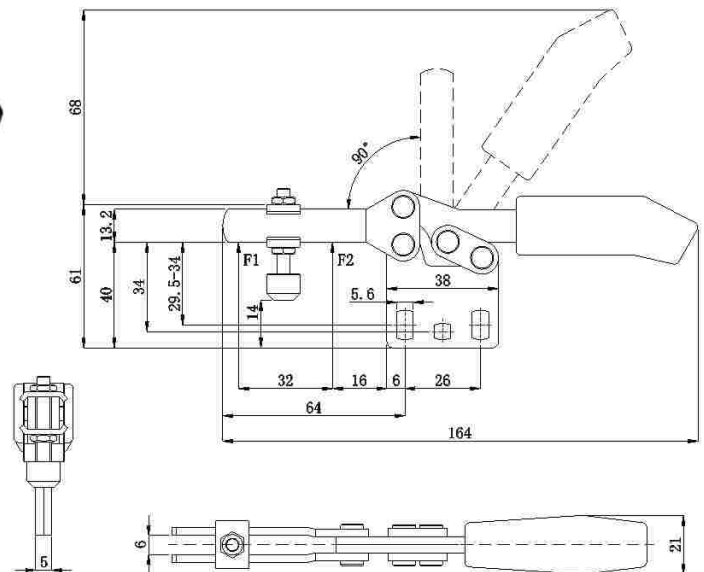**HS-293229****HS-290696**


- WEIGHT(自重): 210g
- HOLDING CAPACITY(夾持力): 185kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- BAR OPENS (壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 68°

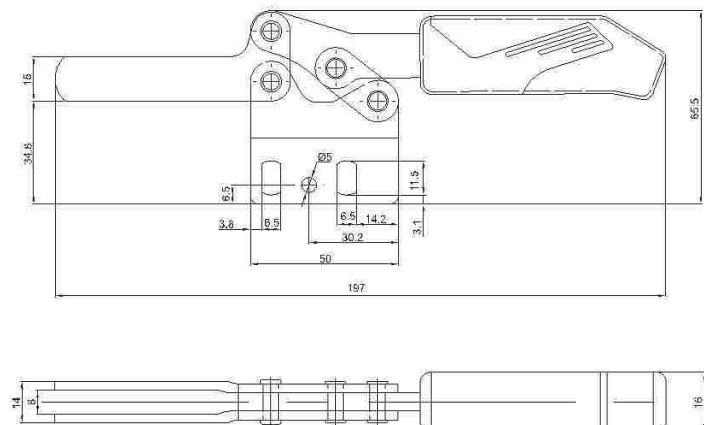**HS-290696**

UNT:mm

HS-290308


- WEIGHT(自重): 105g
- HOLDING CAPACITY(夾持力): 82kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-053808
- BAR OPENS (壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 68°

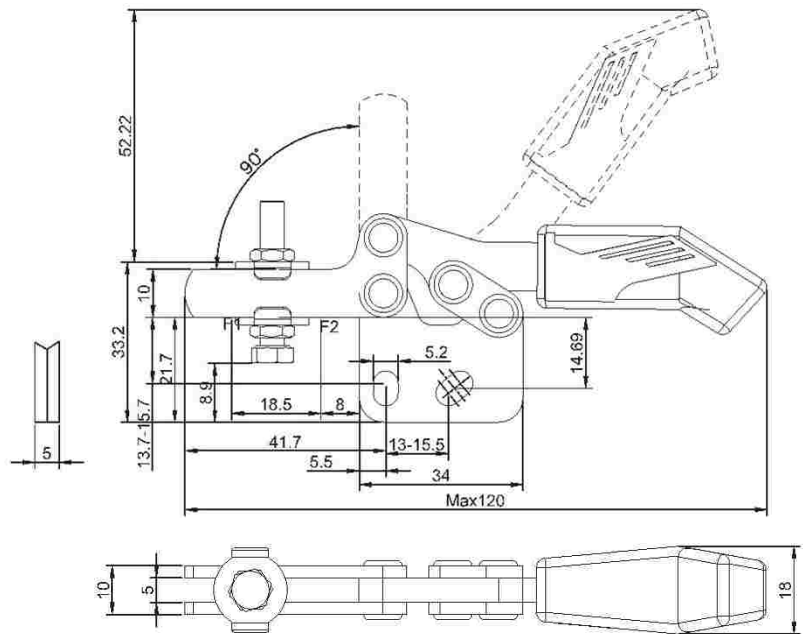**HS-290308**

UNT:mm

HS-201 THRU 201-R

- HOLDING CAPACITY(夾持力): 27Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-08034(NYLON)
- BAR OPENS(壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 80°

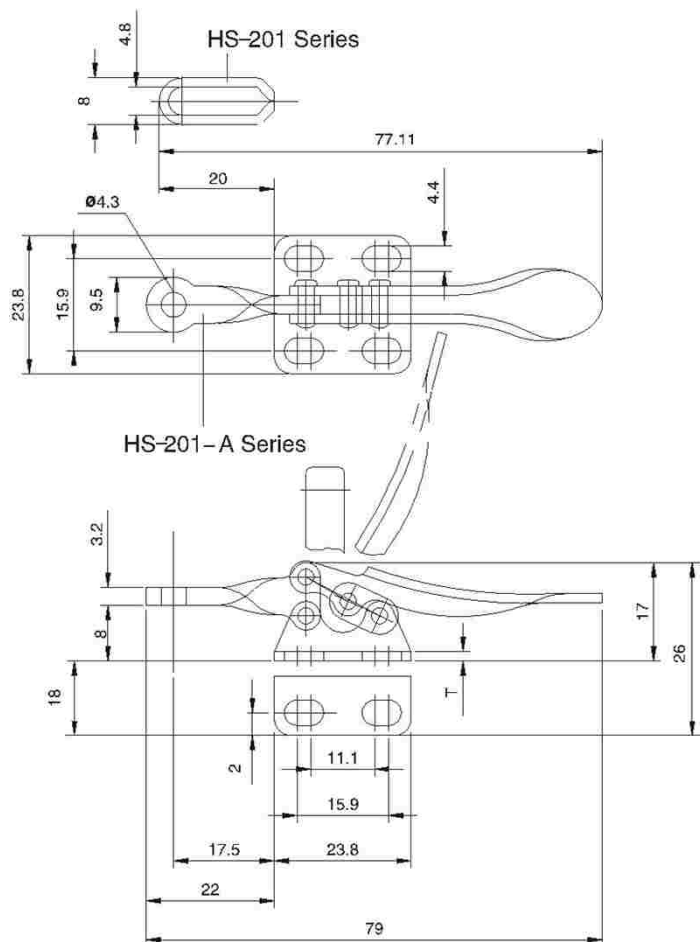**HS-201****HS-201-A**

UNT:mm


MODEL	DESCRIPTION	WEIGHT(g)	T
HS-201-A	SOLID BAR, FLANGED BASE	30	1.6
HS-201-AI	SOLID BAR, STRAIGHT BASE	30	1.6
HS-201-AL	SOLID BAR, LEFT HAND FLANGED BASE	30	3.2
HS-201-AR	SOLID BAR, RIGHT HAND FLANGED BASE	30	3.2
HS-201	U-BAR, FLANGED BASE	35	1.6
HS-201-I	U-BAR, STRAIGHT BASE	35	1.6
HS-201-L	U-BAR, LEFT HAND FLANGED BASE	35	3.2
HS-201-R	U-BAR, RIGHT HAND FLANGED BASE	35	3.2
HS-201-SS	STAINLESS STEEL		
HS-201-ASS	STAINLESS STEEL		

HS-22100 THRU HS-22115

- WEIGHT(自重): 110g
- HOLDING CAPACITY(夾持力): 68Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-14134
- BAR OPENS(壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 90°

**HS-22100**

MODEL	DESCRIPTION	
HS-22100	U-BAR, FLANGED BASE	U型壓把, 法蘭底座
HS-22105	U-BAR, STRAIGHT BASE	U型壓把, 直底座
HS-22110	SOLID BAR, FLANGED BASE	實心壓把, 法蘭底座
HS-22115	SOLID BAR, STRAIGHT BASE	實心壓把, 直底座

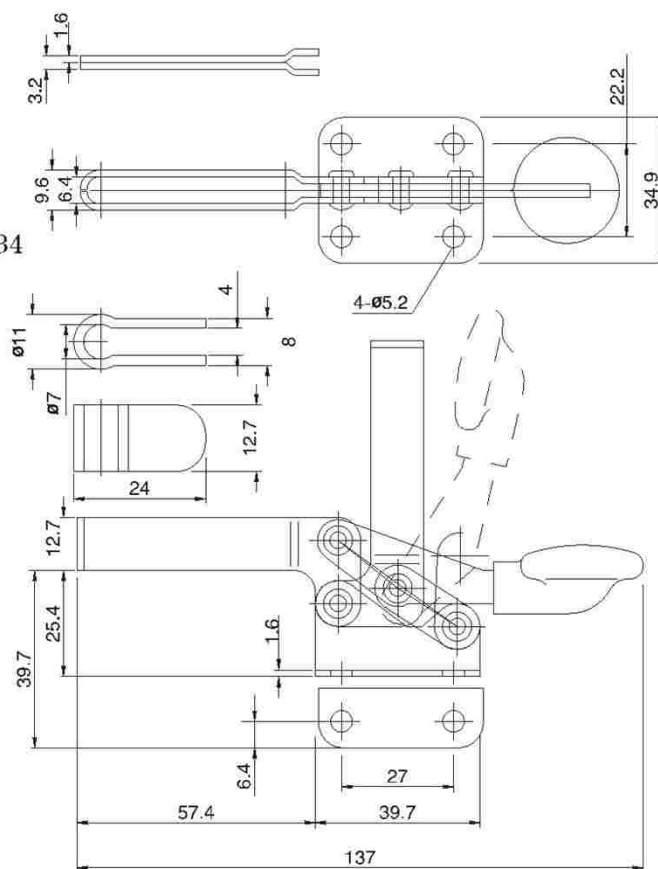

UNT:mm


HS-201-B THRU HS-201-BSI

- WEIGHT(自重): 130g
- HOLDING CAPACITY(夾持力): 90Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-14134
- BAR OPENS(壓把開啓角度): 85°
- HANDLE OPENS(手柄開啓角度): 60°

**HS-201-B**

MODEL	DESCRIPTION	
HS-201-B	U-BAR, FLANGED BASE	U型壓把, 法蘭底座
HS-201-BI	U-BAR, STRAIGHT BASE	U型壓把, 直底座
HS-201-BS	SOLID BAR, FLANGED BASE	實心壓把, 法蘭底座
HS-201-BSI	SOLID BAR, STRAIGHT BASE	實心壓把, 直底座
HS-201-BSS	STAINLESS STEEL	不銹鋼

UNT:mm


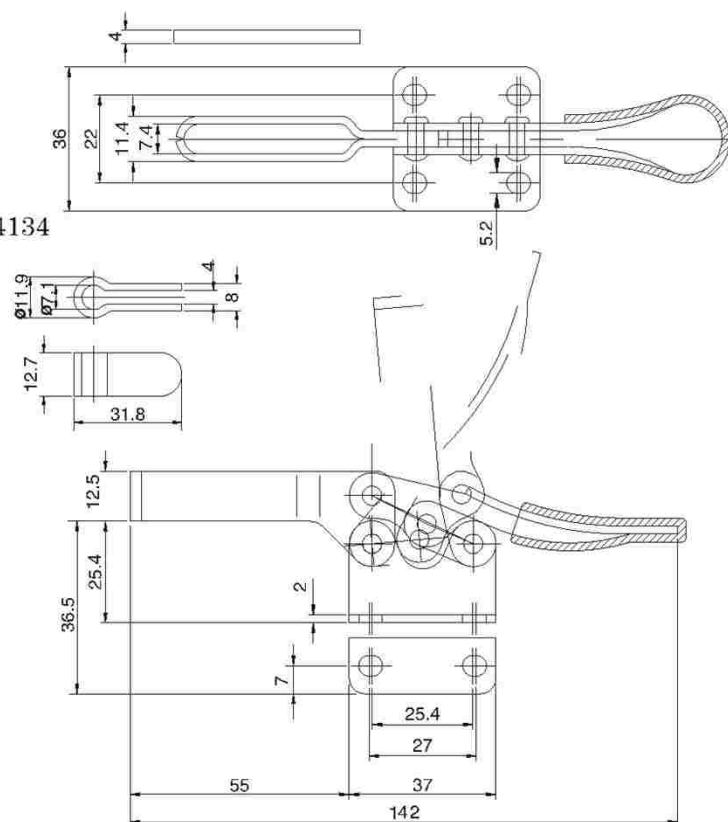


HS-201-BHB THRU HS-201-BSM


- HOLDING CAPACITY(夾持力): 90Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-14134
- BAR OPENS(壓把開啓角度): 85°
- HANDLE OPENS(手柄開啓角度): 60°



HS-201-BHB

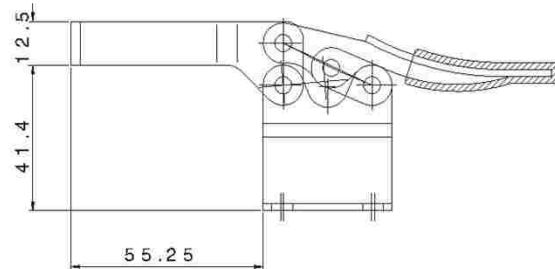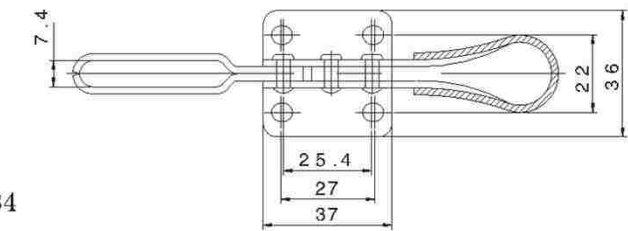

HS-201-BHB

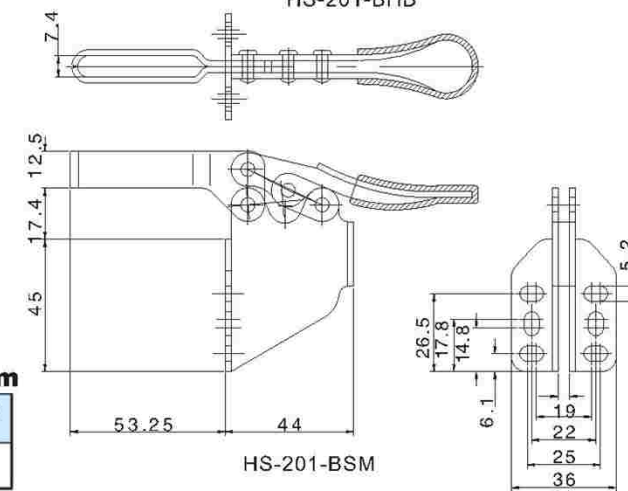

HS-201-BSM

UNT:mm



MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS
HS-201-BHB	148	90	HS-FC-14134	85°	60°
HS-201-BSM	163				

HS-225-D THRU HS-225-DI

- WEIGHT(自重): 265g
- HOLDING CAPACITY(夾持力): 227Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- BAR OPENS(壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 65°




HS-225-D

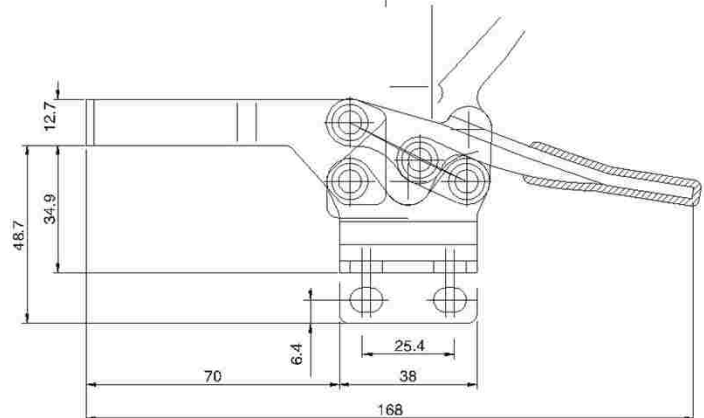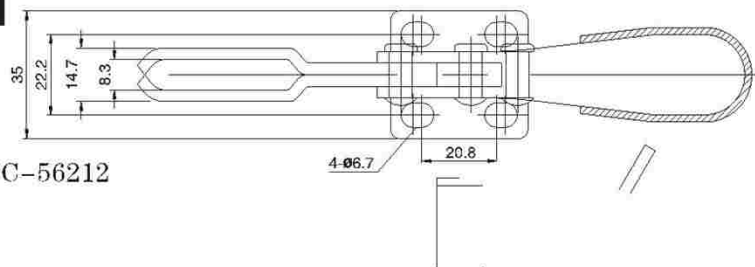


UNT:mm

MODEL	DESCRIPTION
HS-225-D	U-BAR, FLANGED BASE U型壓把, 法蘭底座
HS-225-DI	U-BAR, STRAIGHT BASE U型壓把, 直底座
HS-225-DSS	STAINLESS STEEL 不銹鋼

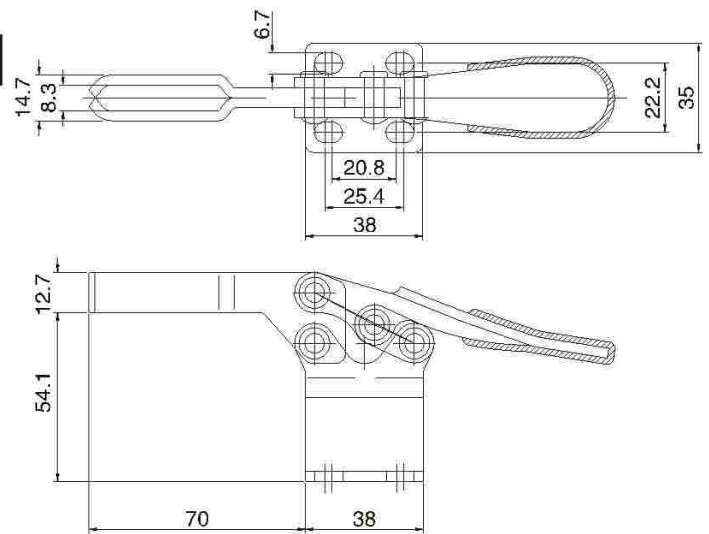HS-225-DHB AND HS-225-DSM
**HS-225-DHB**

HS-225-DHB

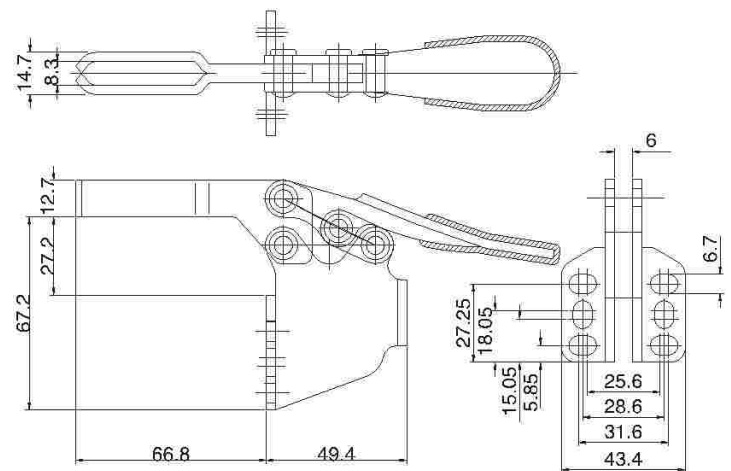**HS-225-DSM**


HS-225-DSM

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS
HS-225-DHB	286	227	HS-FC-56212	90°	65°
HS-225-DSM	315				

UNT:mm

HS-20820

- WEIGHT(自重): 400g
- HOLDING CAPACITY(夾持力): 100Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- BAR OPENS(壓把開啓角度): 185°
- HANDLE OPENS(手柄開啓角度): 60°

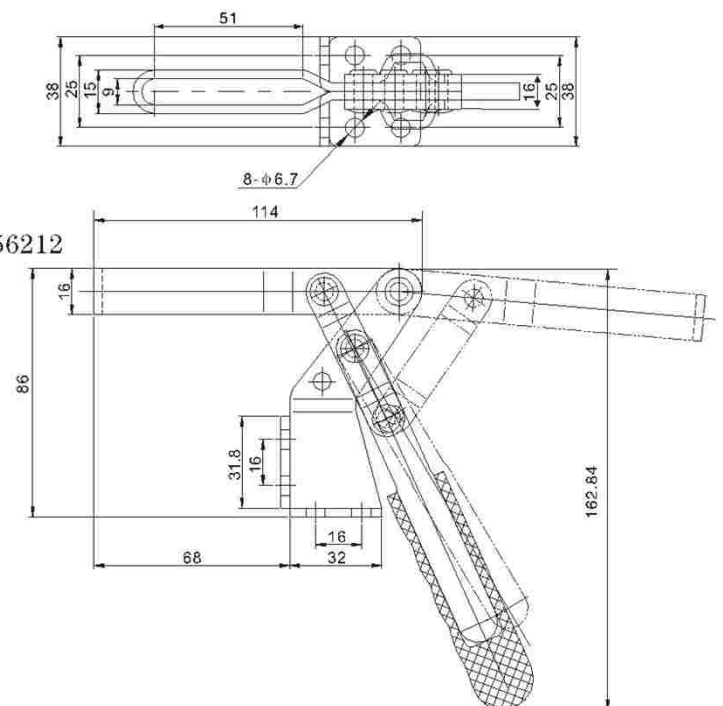**HS-20820**



UNT:mm

HS-22165 THRU HS-22200

- ▶ HOLDING CAPACITY(夾持力): 250Kg
- ▶ SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- ▶ BAR OPENS(壓把開啓角度): 96°
- ▶ HANDLE OPENS(手柄開啓角度): 88°

**HS-22165****HS-22185**

MODEL	DESCRIPTION	WEIGHT(g)
HS-22165	SHORT U-BAR, FLANGED BASE	285
HS-22170	SHORT U-BAR, STRAIGHT BASE	285
HS-22175	SHORT SOLID BAR, FLANGED BASE	300
HS-22180	SHORT SOLID BAR, STRAIGHT BASE	300
HS-22185	LONG OPEN BAR, FLANGED BASE	360
HS-22190	LONG OPEN BAR, STRAIGHT BASE	360
HS-22195	LONG SOLD BAR, FLANGED BASE	365
HS-22200	LONG SOLD BAR, STRAIGHT BASE	365

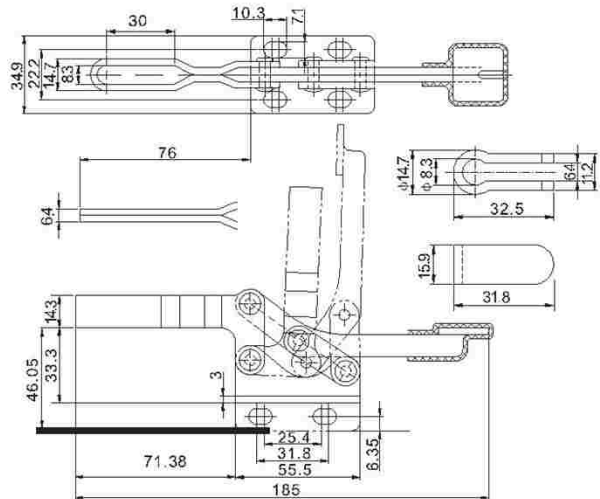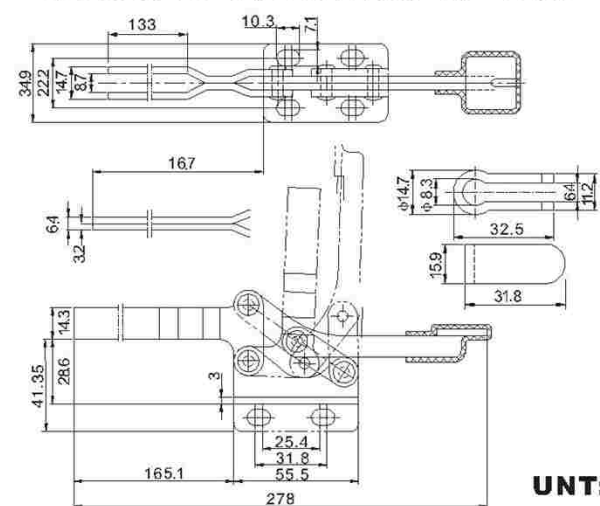SHORT U BAR HS-22165~HS-22180**LONG OPEN BAR HS-22185~HS-22200**


UNT:mm

HS-22235 THRU HS-22250

- ▶ HOLDING CAPACITY(夾持力): 273Kg
- ▶ SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- ▶ BAR OPENS(壓把開啓角度): 111°
- ▶ HANDLE OPENS(手柄開啓角度): 94°

**HS-22235**


MODEL	DESCRIPTION	WEIGHT(g)
HS-22235	OPEN BAR, FLANGED BASE	640
HS-22240	OPEN BAR, STRAIGHT BASE	640
HS-22245	SOLID BAR, FLANGED BASE	655
HS-22250	SOLID BAR, STRAIGHT BASE	655

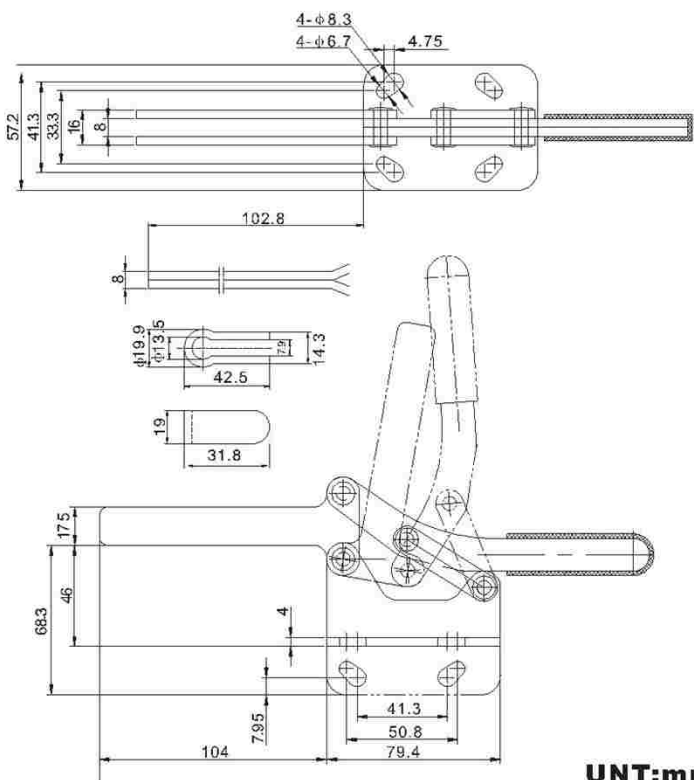

UNT:mm

HS-20235 THRU HS-20236

- WEIGHT(自重): 640g
- HOLDING CAPACITY(夾持力): 340Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-FC-38312
- BAR OPENS(壓把開啓角度): 85°
- HANDLE OPENS(手柄開啓角度): 50°

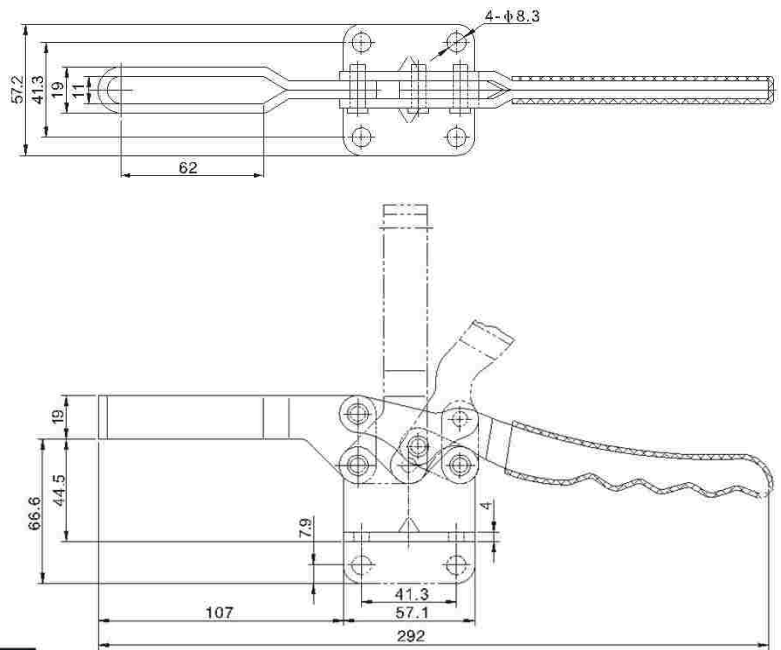
**HS-20235**

UNT:mm

MODEL	DESCRIPTION
HS-20235	U-BAR, FLANGED BASE U型壓把, 法蘭底座
HS-20236	U-BAR, STRAIGHT BASE U型壓把, 直底座
HS-20235-SS	STAINLESS STEEL 不銹鋼

HS-20752-B THRU HS-24502-B

- HS-24502-B has
 - Hardened bushings
 - Removable ground pins.
- 在轉動關鍵部位裝有耐磨套



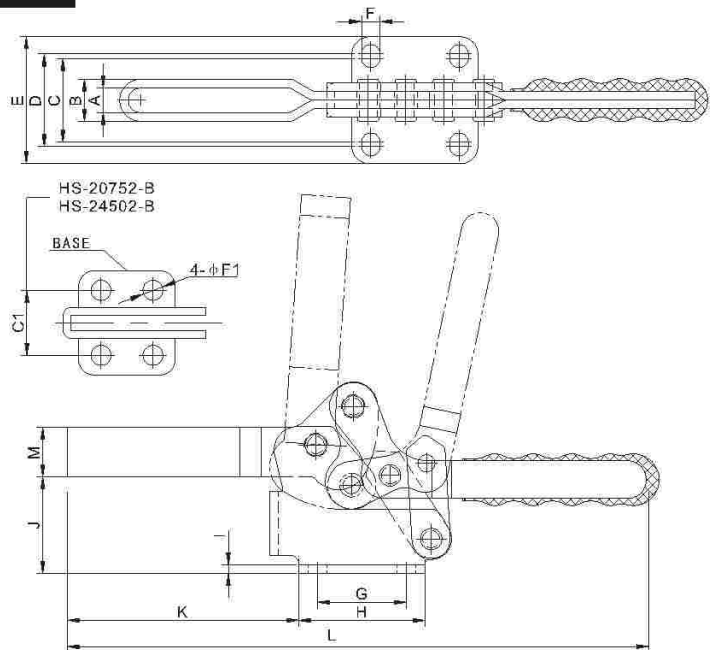
**HS-20752-B**

UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS	A	B	C	C1	D	E	F	φF1	G	H	I	J	K	L	M
HS-20752-B	100	75	HS-SA-053008	94°	76°	5.8	9.8	—	16.8	—	27	—	5.2	13.5	25	2	19	37	109	9.5
HS-21502-B	230	150	HS-SA-064010			6.2	11.2	22	—	28	40	5.5	—	26	38	2.5	25.05	61.87	171	14
HS-22502-B	430	250	HS-SA-085012			9	15	26	—	31	47	6.6	—	26	42	3	34	79	219	17.5
HS-23502-B	500	350	HS-SA-107515			11.4	19.4	39	—	42.9	60	8.7	—	41.2	59	4	45	108	274	23
HS-24502-B	1400	450	HS-SA-121017			13.2	23.2	—	41.3	—	67	—	8.7	41.2	66	5	59	128	303	26
HS-20752-BSS	STAINLESS STEEL																			
HS-21502-BSS	STAINLESS STEEL																			

HS-201-C





- WEIGHT(自重): 140g
- HOLDING CAPACITY(夾持力): 100Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-14134
- BAR OPENS(壓把開啓角度): 79°
- HANDLE OPENS(手柄開啓角度): 87°

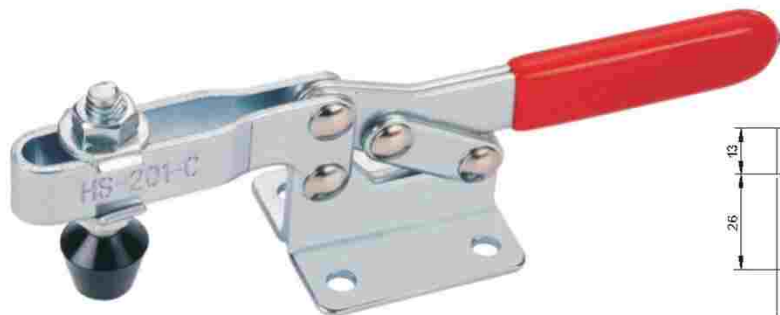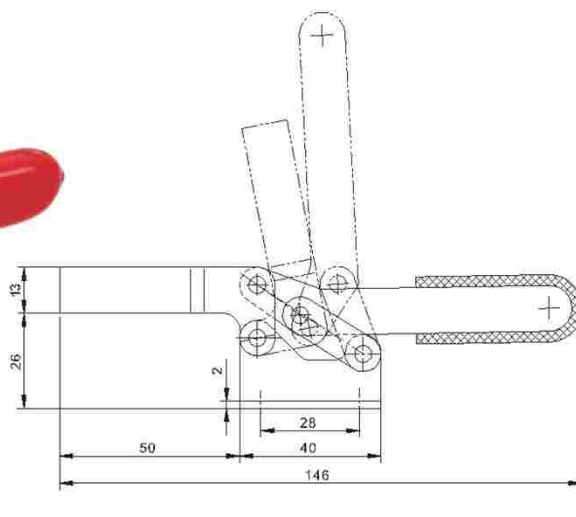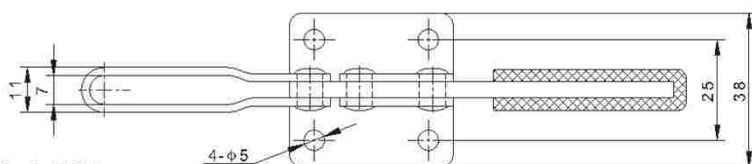**HS-201-C**

UNT:mm

HS-203-F HS-202-F**HS-203-FL HS-202-FL HS-203-P**

- HOLDING CAPACITY(夾持力): 227Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-56212
- BAR OPENS(壓把開啓角度): 85°
- HANDLE OPENS(手柄開啓角度): 58°

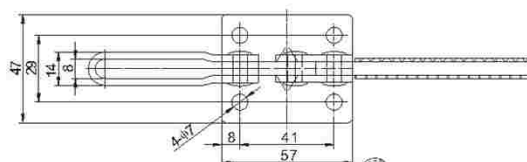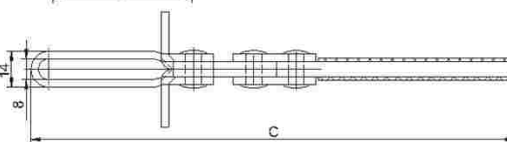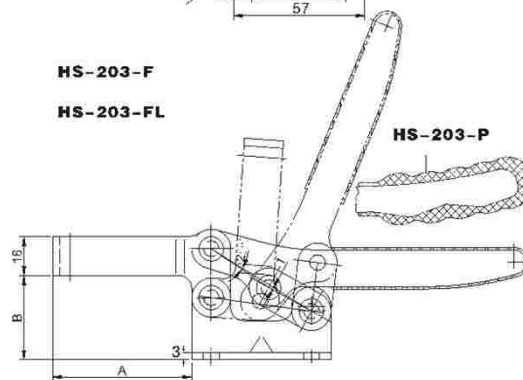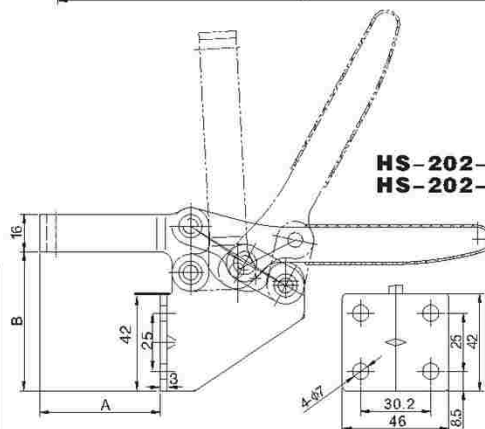
**HS-203-F****HS-203-FL****HS-203-P****HS-203-F****HS-203-P****HS-202-F****HS-202-F
HS-202-FL**

MODEL	DESCRIPTION	WEIGHT(g)	A	B	C
HS-203-F	U-BAR, FLANGED BASE	340	57	34	198
HS-203-FL	LONG U-BAR, FLANGED BASE	380	94	34	230
HS-202-F	U-BAR, SIDE MOUNTED	385	52	60	198
HS-202-FL	LONG U-BAR, SIDE MOUNTED	425	89	60	230
HS-203-P	U-BAR, FLANGED BASE, LONG HANDLE	383	57	39.3	233
HS-203-FSS	STAINLESS STEEL				

UNT:mm

HS-204-G**HS-204-GL**



- ▶ **Heavy Duty**
- ▶ **Can be Mounted to any Fixture Using the 4 Hole Bolt Pattern or to Any T-Slot Table with T-Slot Bolt.**
安裝方便,适用于螺栓,T型槽和T型螺栓安装等.
- ▶ **Supplied with bushings**
- ▶ **Hardened ground pivots**
在产品转动关键部位装有耐磨套
- ▶ **WEIGHT(自重): 1220g**
- ▶ **HOLDING CAPACITY(夾持力): 636Kg**
- ▶ **SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-12300**
- ▶ **BAR OPENS(壓把開啓角度): 91°**
- ▶ **HANDLE OPENS(手柄開啓角度): 94°**

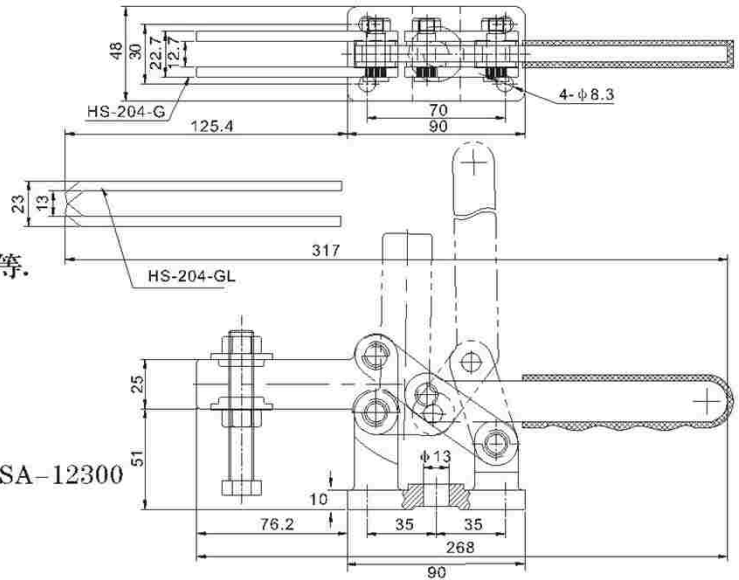**HS-204-G****UNT:mm**


MODEL	DESCRIPTION
HS-204-G	OPEN BAR, DUCTILE IRON BASE
HS-204-GL	LONG OPEN BAR, DUCTILE IRON BASE

HS-204-GB**HS-204-GBL****HS-204-GBLH**

- ▶ **HOLDING CAPACITY(夾持力): 630Kg**
- ▶ **SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-12300**
- ▶ **BAR OPENS(壓把開啓角度): 90°**
- ▶ **HANDLE OPENS(手柄開啓角度): 94°**

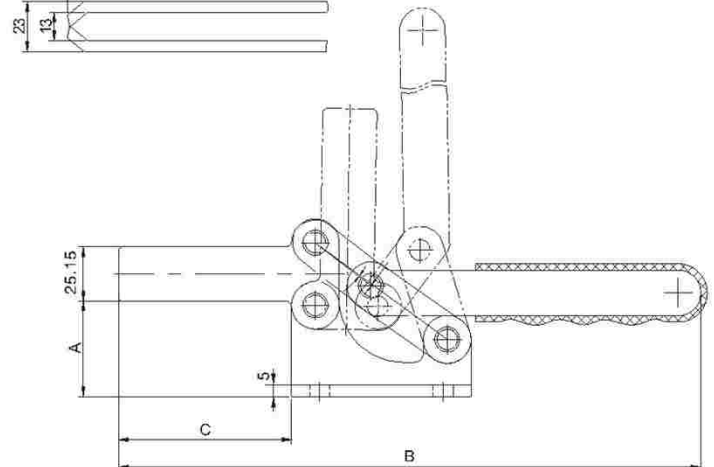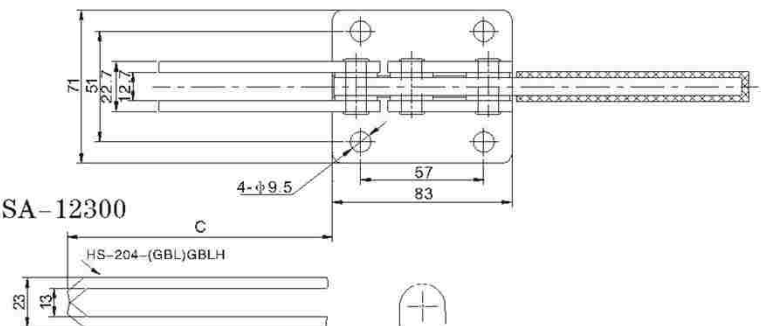**HS-204-GBLH****UNT:mm**

MODEL	DESCRIPTION	WEIGHT(g)	A	B	C
HS-204-GB	SHORT BAR, LOW BASE	1180	45	269	80
HS-204-GBL	LONG BAR, LOW BASE	1260	45	316	127
HS-204-GBLH	LONG BAR, HIGH BASE	1465	71	316	127

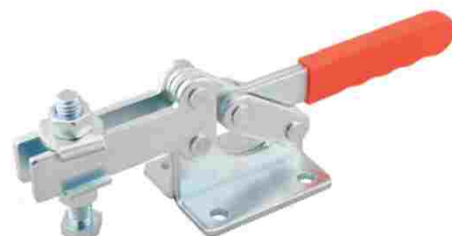**HS-204-GB**



HS-22005 THRU HS-22040

- WEIGHT(自重): 25g
- HOLDING CAPACITY(夾持力): 22.7Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-08034(NYLON)
- BAR OPENS(壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 60°



HS-22025

MODEL	DESCRIPTION
HS-22005	HIGH BAR, FLANGED BASE
HS-22010	HIGH BAR, STRAIGHT BASE
HS-22015	HIGH BAR, RIGHT HAND FLANGED BASE
HS-22020	HIGH BAR, LEFT HAND STRAIGHT BASE
HS-22025	LOW BAR, FLANGED BASE
HS-22030	LOW BAR, STRAIGHT BASE
HS-22035	LOW BAR, RIGHT HAND FLANGED BASE
HS-22040	LOW BAR, LEFT HAND STRAIGHT BASE

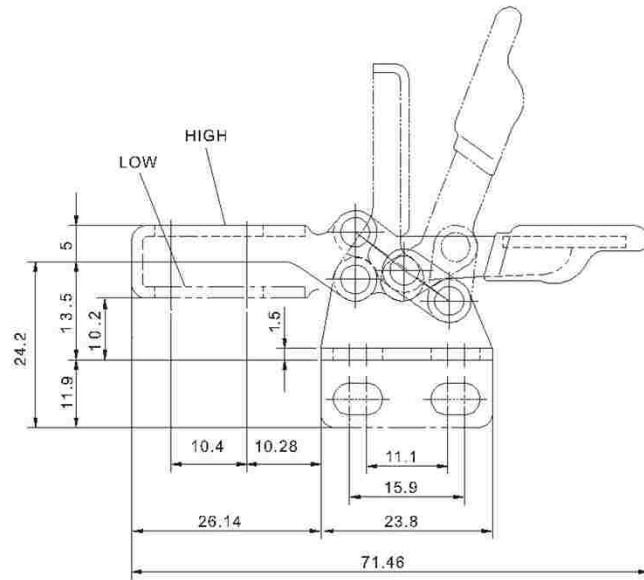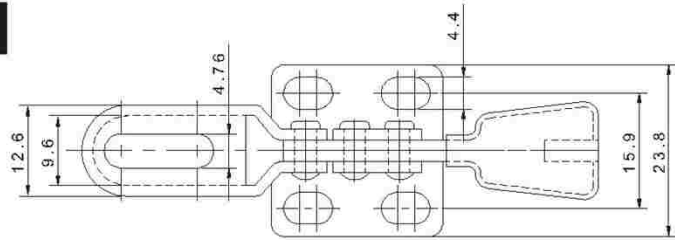



UNT:mm

HS-20400

- WEIGHT(自重): 25.5g
- HOLDING CAPACITY(夾持力): 20Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-042507
- BAR OPENS(壓把開啓角度): 55°
- HANDLE OPENS(手柄開啓角度): 60°




HS-20400

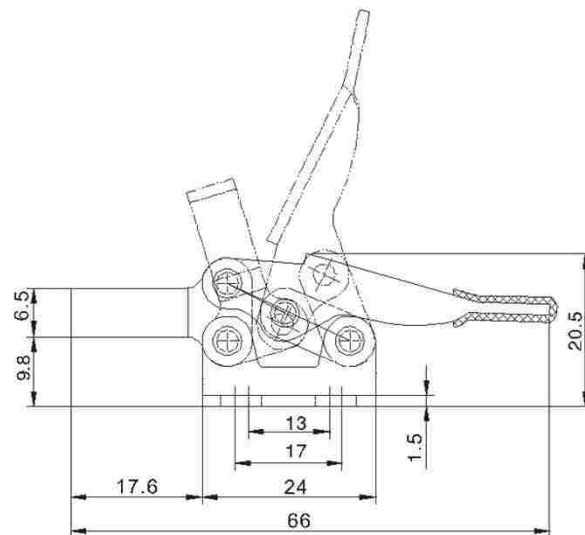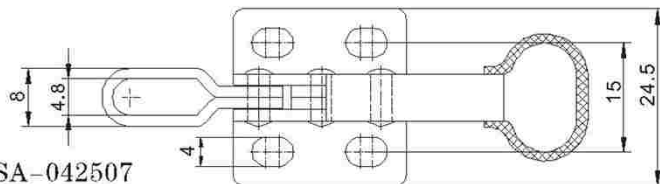

UNT:mm

HS-20100



- WEIGHT(自重): 35g
- HOLDING CAPACITY(夾持力): 20Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-042507
- BAR OPENS(壓把開啓角度): 75°
- HANDLE OPENS(手柄開啓角度): 75°

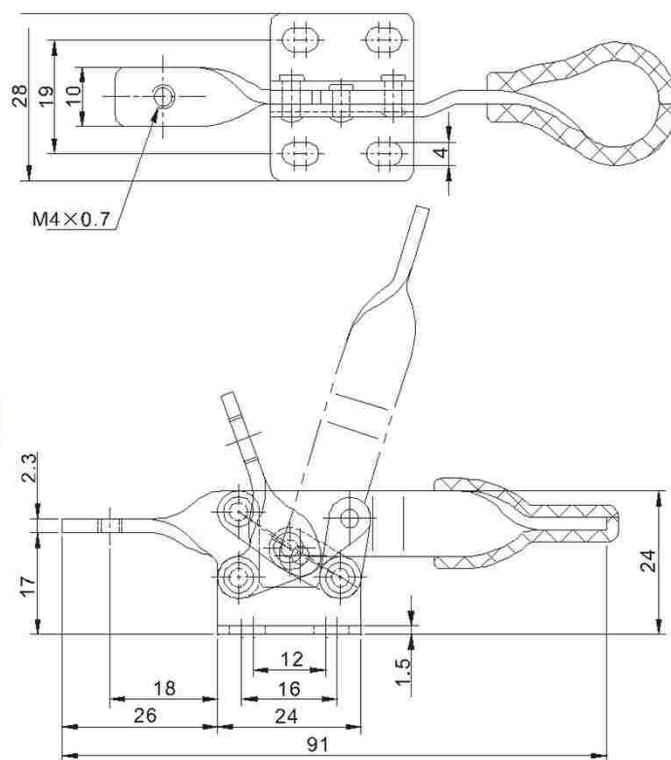**HS-20100**

UNT:mm

HS-2300 AND HS-2301-B**HS-2500 AND HS-2501-B****HS-2600 AND HS-2601-B**

- BAR OPENS(壓把開啓角度): 90°
- HANDLE OPENS(手柄開啓角度): 58°

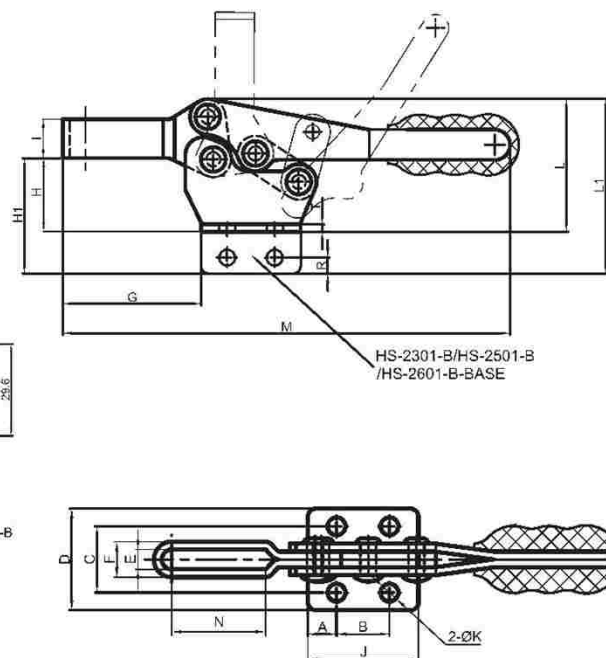**HS-2300**HS-2500ANDHS-25001-B
BASE

MODEL	WEIGHT (g)	HOLDING CAPACITY(gK)	SPINDLE SUPPLIED	A	B	C	D	E	F	G	H	H1	I	J	ΦK	L	L1	M	N	R	T
HS-2300	94	68	HS-FC-10130	7.3	13.4	16.8	25.7	5	9	39	20.7	-	11	28	4.5	37.35	-	115.4	23.8	-	2
HS-2301-B	94	68	HS-FC-10130	7.3	13.4	-	-	5	9	39	-	28.5	11	28	4.5	-	45.15	115.4	23.8	4.45	2
HS-2500	318	227	HS-FC-56300	7.2	26.2	31.3	44	9.4	15.4	72	34.6	-	14.2	39.6	6.8	62.6	-	186	47.2	-	3
HS-2501-B	318	227	HS-FC-56300	7.2	26.2	-	-	9.4	15.4	72	-	48.8	14.2	39.6	6.8	-	76.8	186	47.2	7.2	3
HS-2600	352	340	HS-FC-56300	8.8	26	28.6	42	9.4	15.4	64.5	36.8	-	18	44	6.4	61.5	-	190.6	40.8	-	3
HS-2601-B	352	340	HS-FC-56300	8.8	26	-	-	9.4	15.4	64.5	-	50	18	44	6.4	-	74.7	190.6	40.8	6.7	3


HS-20800 AND HS-21800

- WEIGHT(自重): 40g
- HOLDING CAPACITY(夾持力): 30Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-042507
- BAR OPENS(壓把開啓角度): 80°
- HANDLE OPENS(手柄開啓角度): 88°



HS-20800

MODEL	DESCRIPTION
HS-20800	FLANGED BASE U型壓把,法蘭底座
HS-21800	STRAIGHT BASE U型壓把,直底座
HS-20800-SS	STAINLESS STEEL 不銹鋼

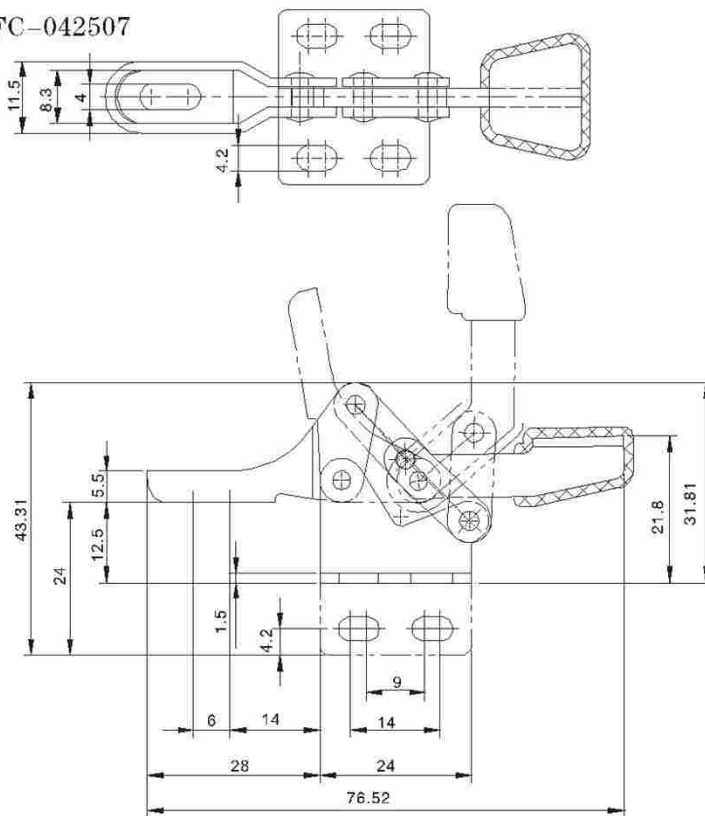


UNT:mm

HS-20300

- WEIGHT(自重): 100g
- HOLDING CAPACITY(夾持力): 30Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-044007
- BAR OPENS(壓把開啓角度): 65°
- HANDLE OPENS(手柄開啓角度): 55°





HS-20300

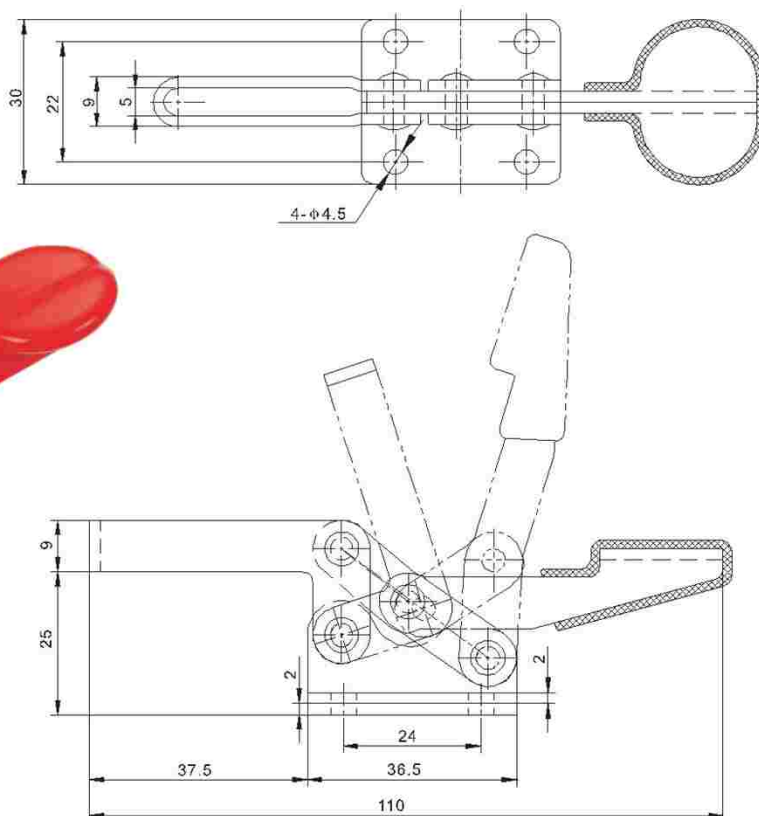

UNT:mm

HS-21383



- WEIGHT(自重): 210g
- HOLDING CAPACITY(夾持力): 250Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-065010
- BAR OPENS(壓把開啓角度): 72°
- HANDLE OPENS(手柄開啓角度): 72°

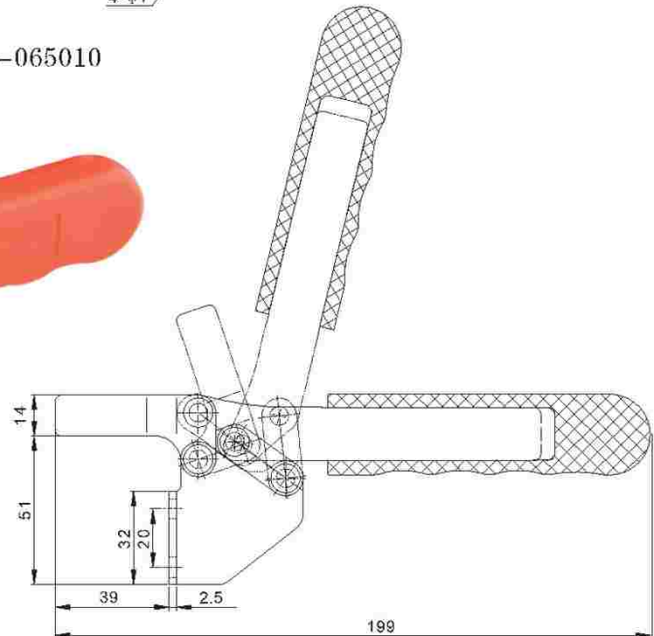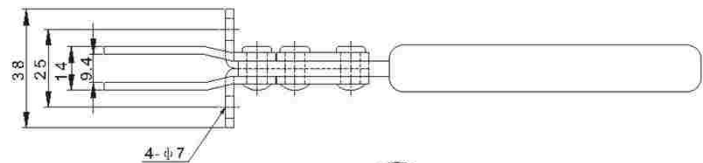**HS-21383**

UNT:mm

HS-25383

- WEIGHT(自重): 435g
- HOLDING CAPACITY(夾持力): 280Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-086512
- BAR OPENS(壓把開啓角度): 80°
- HANDLE OPENS(手柄開啓角度): 80°

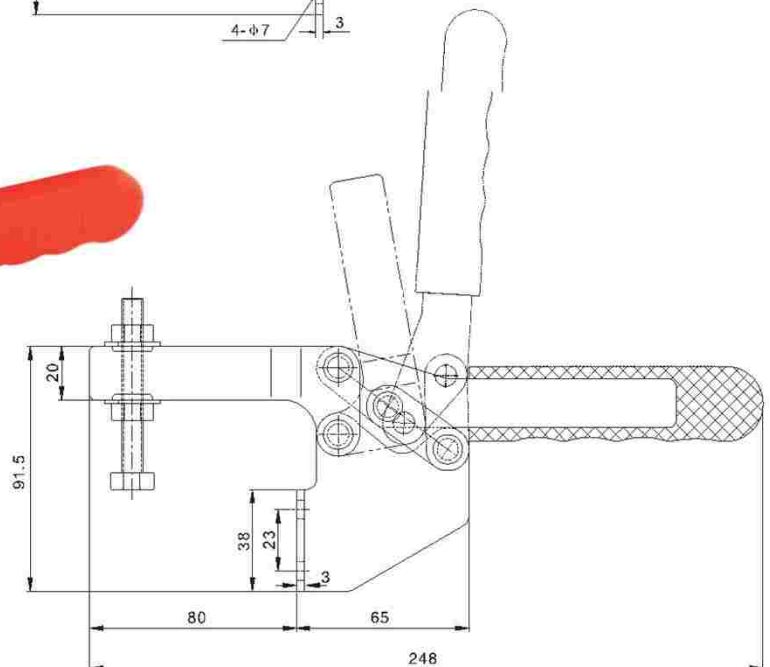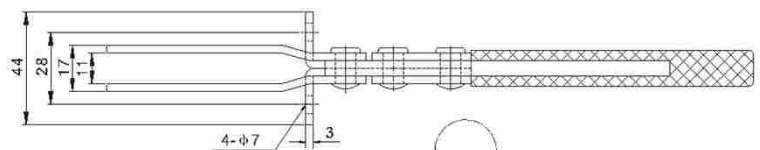**HS-25383**


UNT:mm

HS-21382 AND HS-22382

- WEIGHT(自重): 190g
- HOLDING CAPACITY(夾持力): 250Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-065010
- BAR OPENS(壓把開啓角度): 75°
- HANDLE OPENS(手柄開啓角度): 70°

**HS-21382**

MODEL	DESCRIPTION
HS-21382	FLANGED BASE 法蘭底座
HS-22382	STRAIGHT BASE 直底座
HS-21382-SS	STAINLESS STEEL 不銹鋼

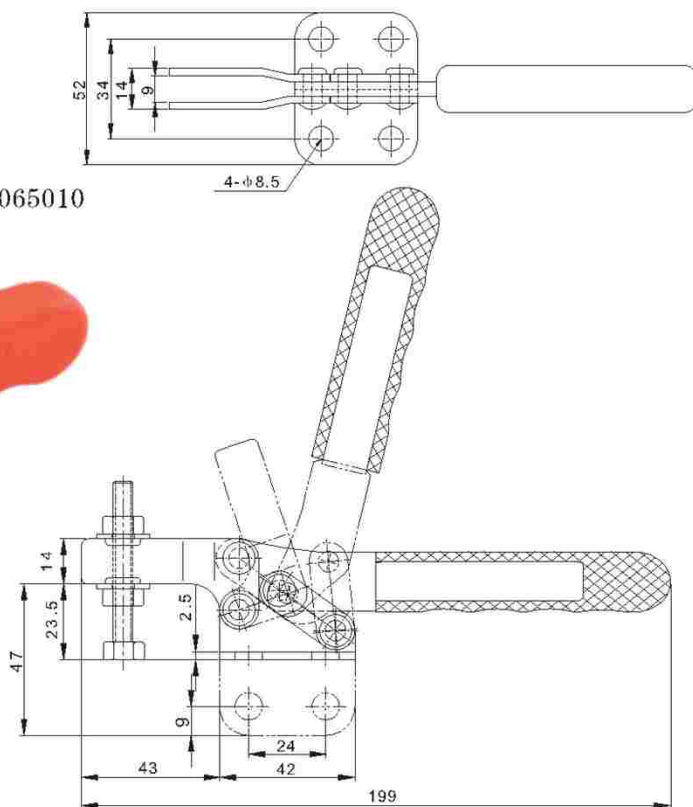


UNT:mm

HS-25382 AND HS-26382

- WEIGHT(自重): 380g
- HOLDING CAPACITY(夾持力): 280Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-086512
- BAR OPENS(壓把開啓角度): 80°
- HANDLE OPENS(手柄開啓角度): 80°

**HS-25382**


MODEL	DESCRIPTION
HS-25382	FLANGED BASE 法蘭底座
HS-26382	STRAIGHT BASE 直底座

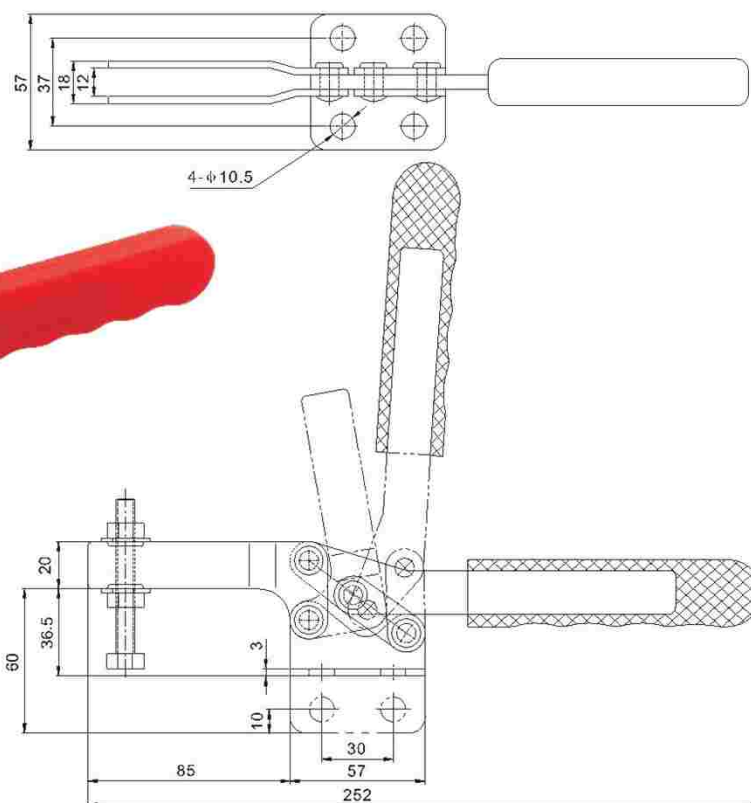

UNT:mm

HS-21385



- WEIGHT(自重): 490g
- HOLDING CAPACITY(夾持力): 300Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-38200
- BAR OPENS(壓把開啓角度): 80°
- HANDLE OPENS(手柄開啓角度): 85°

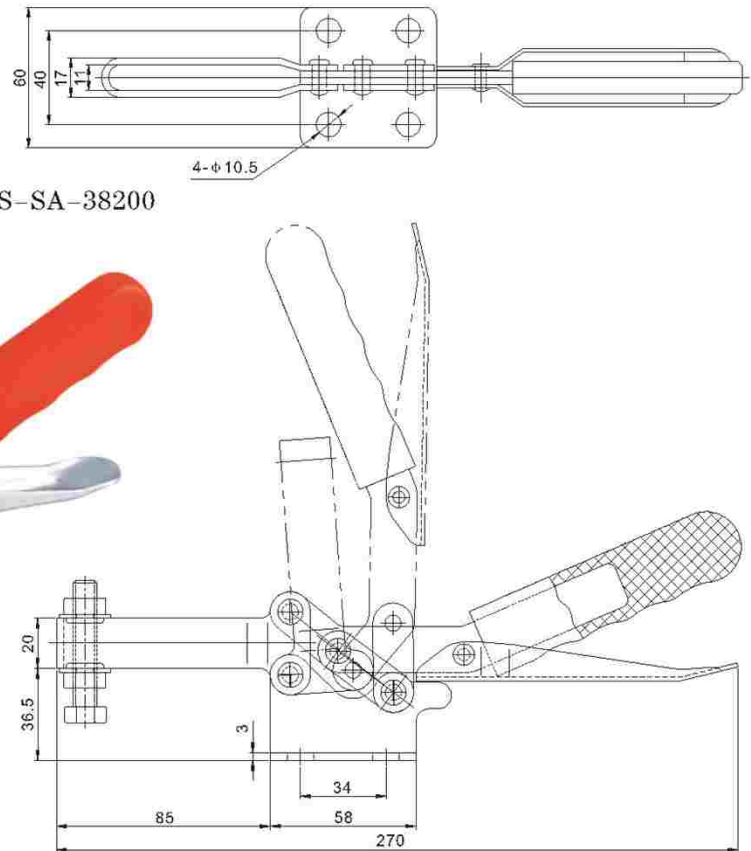**HS-21385**

UNT:mm



HS-21384 AND HS-22384

- WEIGHT(自重): 635g
- HOLDING CAPACITY(夾持力): 500Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-106515
- BAR OPENS(壓把開啓角度): 65°
- HANDLE OPENS(手柄開啓角度): 85°

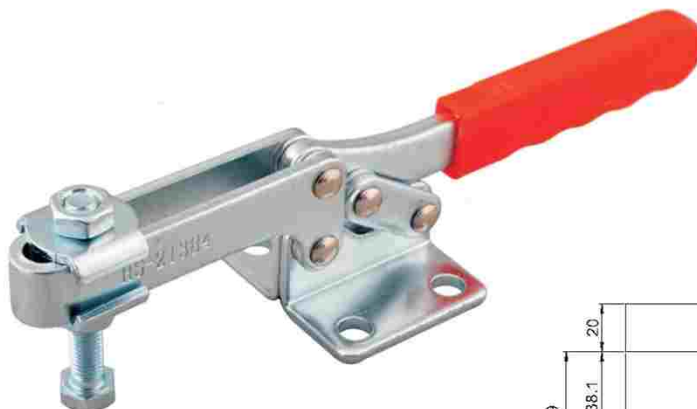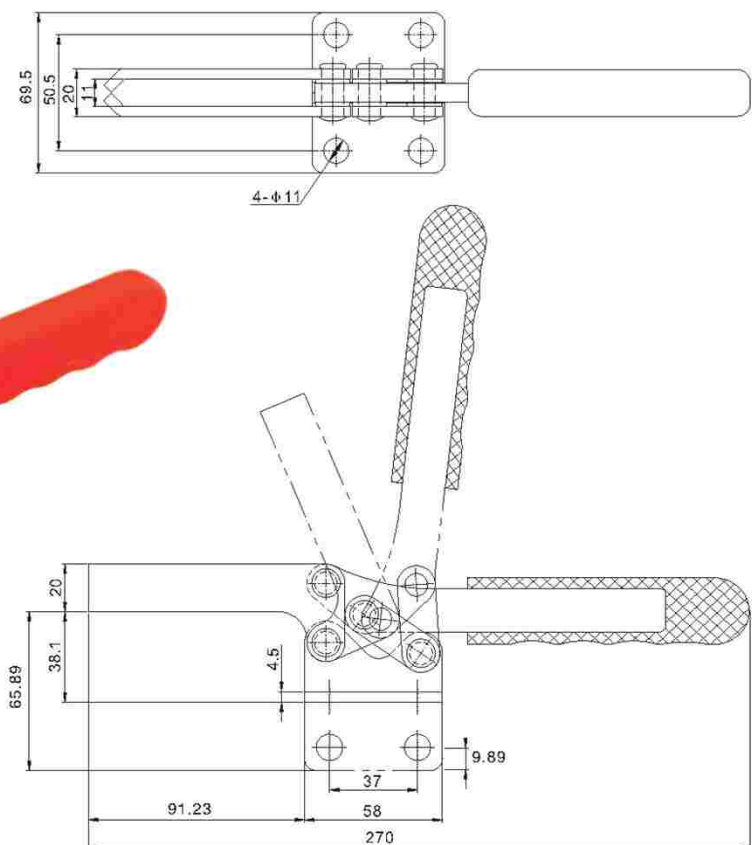**HS-21384**

UNT:mm

MODEL	DESCRIPTION
HS-21384	FLANGED BASE 法蘭底座
HS-22384	STRAIGHT BASE 直底座

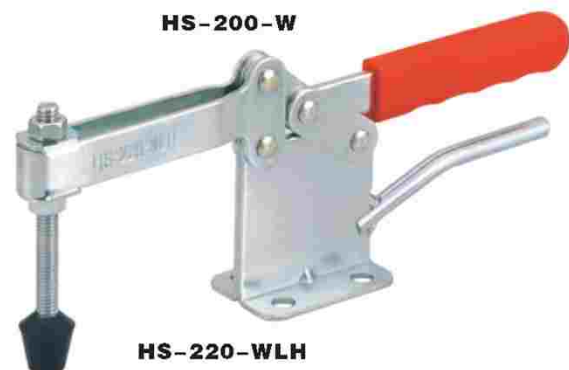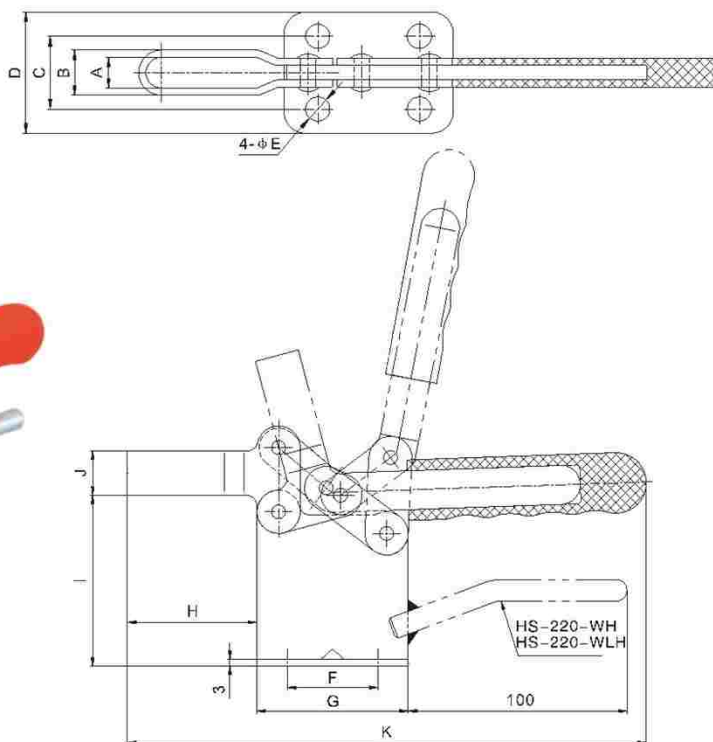HS-200-W THRU HS-220-WLH**HS-200-W****HS-220-WLH**

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS	A	B	C	D	φ E	F	G	H	I	J	K	L
HS-200-W	600	400	HS-FC-38312	75°	77°	12.6	19	30	50	10	42	70	60	54	20.5	240	3.2
HS-200-WL	640					12.6	19	30	50	10	42	70	110	54	20.5	290	3.2
HS-200-WH	700		HS-FC-38412			12.6	19	30	50	10	42	70	60	79	20.5	240	3.2
HS-200-WLH	745					12.6	19	30	50	10	42	70	110	79	20.5	290	3.2
HS-220-WH	790					12.6	19	30	50	10	42	70	60	79	20.5	240	3.2
HS-220-WLH	830					12.6	19	30	50	10	42	70	110	79	20.5	290	3.2

HS-20448


WEIGHT(自重): 760g

HOLDING CAPACITY(夹持力): 350Kg

SPINDLE SUPPLIED(压头螺丝型号): HS-SA-105015

BAR OPEN(压把开启角度): 90°

HANDLE OPENS(手柄开启角度): 83°

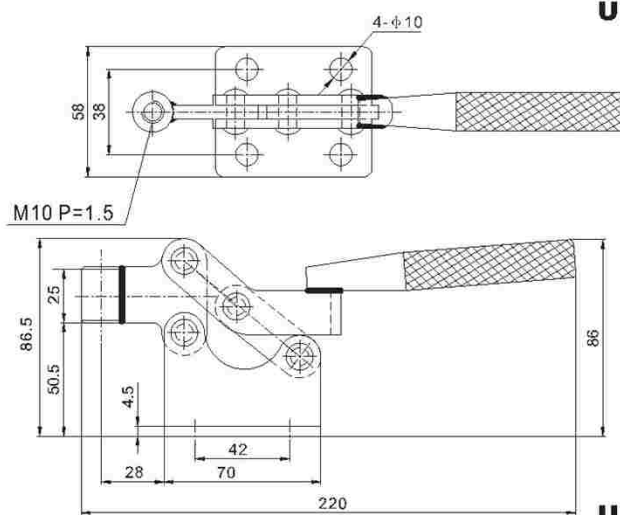**HS-20448**

UNT:mm

UNT:mm





HS-301-AM AND HS-301-BM

- WEIGHT(自重): 50g
- HOLDING CAPACITY(夾持力): 45Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-042007(NYLON)
- HANDLE OPENS(手柄開啓角度): 190°
- PLUNGER STROKE(行程): 16.7mm
- HS-301-AMSS
- STAUBKESSE STEEL



HS-301-AM

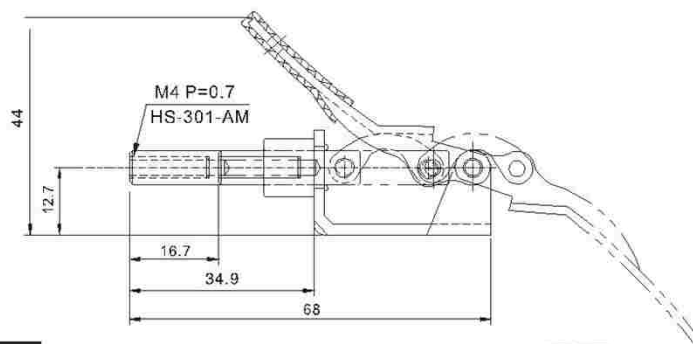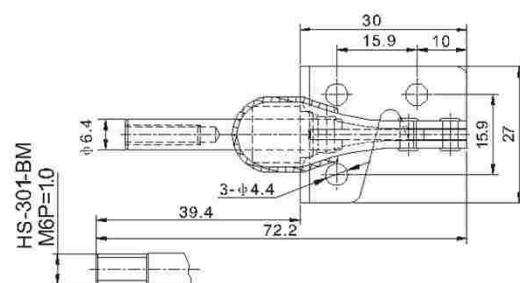



UNT:mm

HS-302-FM AND HS-302-FMSS

- WEIGHT(自重): 300g
- HOLDING CAPACITY(夾持力): 136Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-085012
- HANDLE OPENS(手柄開啓角度): 180°
- PLUNGER STROKE(行程): 32mm
- HS-302FMSS STAINLESS STEEL



HS-302-FM

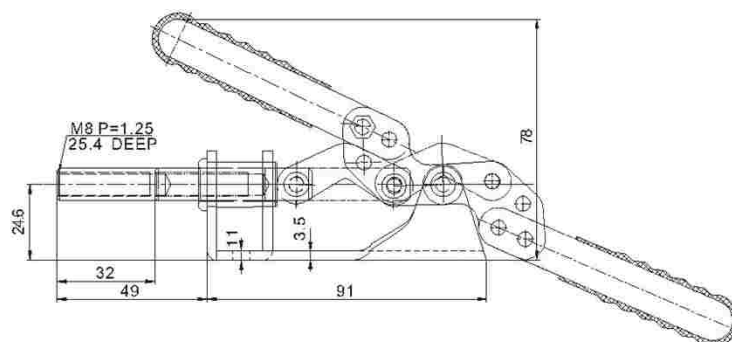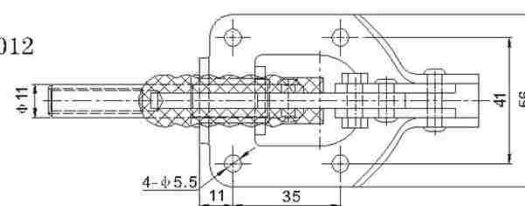



UNT:mm

HS-36092M AND HS-36092MSS

- WEIGHT(自重): 397g
- HOLDING CAPACITY(夾持力): 180Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-085012
- HANDLE OPENS(手柄開啓角度): 180°
- PLUNGER STROKE(行程): 31.8mm
- HS-36092MSS STAINLESS STEEL





HS-36092M

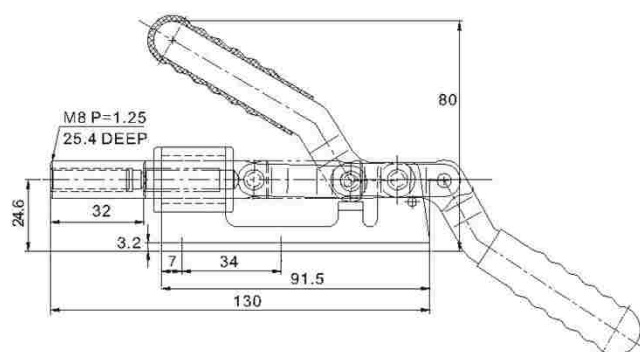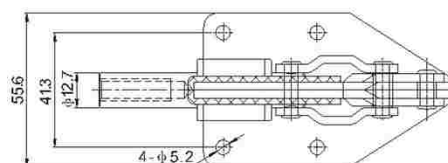

UNT:mm

HS-36003M


- WEIGHT(自重): 355g
- HOLDING CAPACITY(夾持力): 272Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-085012
- HANDLE OPENS(手柄開啓角度): 180°
- PLUNGER STROKE(行程): 31.8mm

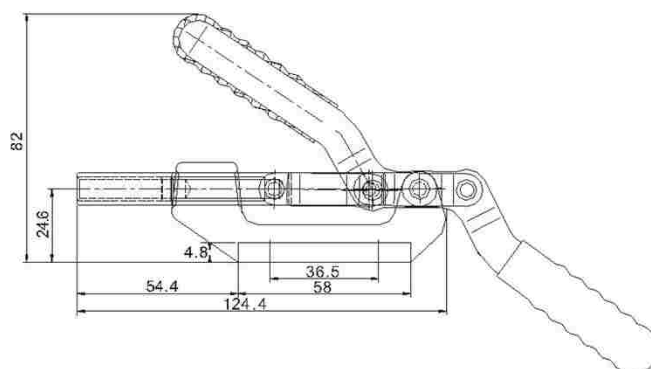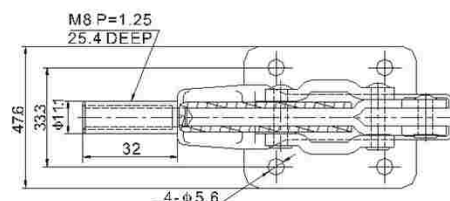**HS-36003M****HS-36010M AND HS-36012M**


- WEIGHT(自重): 800g
- HOLDING CAPACITY(夾持力): 364Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-105015
- HANDLE OPENS(手柄開啓角度): 180°
- PLUNGER STROKE(行程): 41.3mm

**HS-36010M**

MODEL	DESCRIPTION
HS-36010M	FLANGED BASE U型壓把,法蘭底座
HS-36012M	STRAIGHT BASE U型壓把,直底座

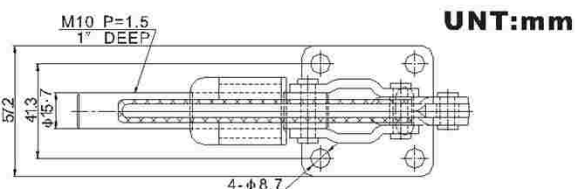



UNT:mm

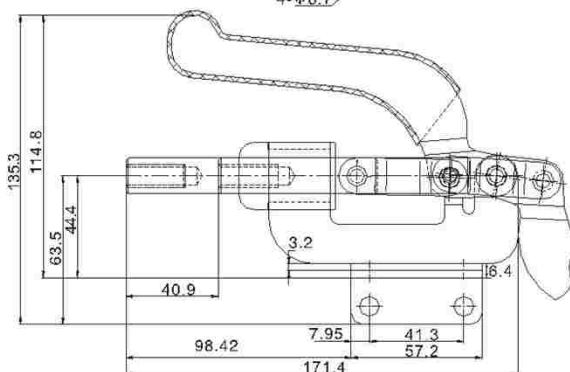

UNT:mm

HS-30607M AND HS-30608M


- Forged alloy steel base (底座为锻造合金钢)
- WEIGHT(自重): 700g
- HOLDING CAPACITY(夾持力): 318Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-085012
- HANDLE OPENS(手柄開啓角度): 180°
- PLUNGER STROKE(行程): 41.3mm

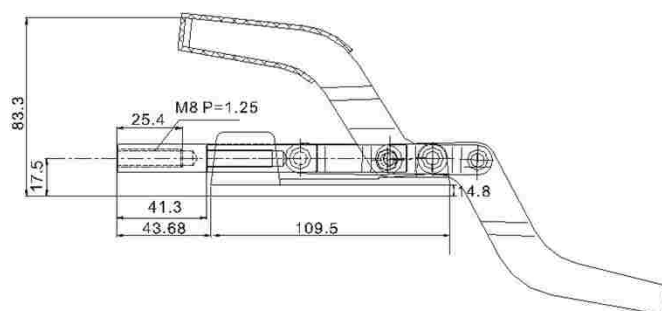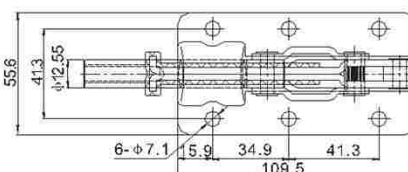**HS-30607M****HS-30608M**


UNT:mm

HS-36330M

- Foreged alloy steel base (底座为锻造合金钢)
- WEIGHT(自重): 935g
- HOLDING CAPACITY(夹持力): 1136Kg
- SPINDLE SUPPLIED(压头螺丝型号): HS-SA-105015
- HANDLE OPENS(手柄开启角度): 180°
- PLUNGER STROKE(行程): 50.8mm
- HS-36330M-SS(不锈钢材质型号)

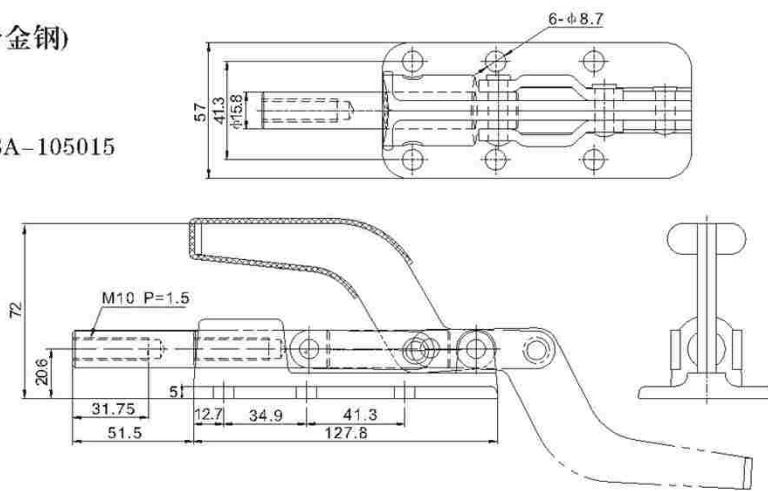**HS-36330M****UNT:mm****HS-36202M****HS-36204M****HS-36224M**



- Plunger Clamp With Threaded Collar for Mounting Through Panels or Plates.
夹具依靠外螺纹固定安装
- HANDLE OPENS(手柄开启角度)180°

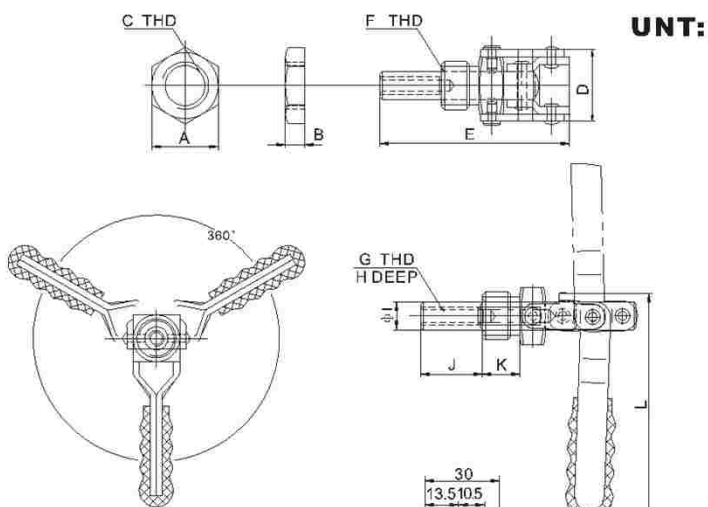**HS-36204ML(手柄加長)****HS-36225****HS-36203****HS-36224M****HS-36205****HS-36203****HS-36205****HS-36225****UNT:mm**

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	PLUNGER STROKE	OPTIONAL MOUNTING BRACKET	A	B	C	F	D	E	G	H	φI	J	K	L
HS-36202M	113	91	HS-SA-064010	20	HS-36203	23	6.4	M16 P=1.5	24	63	M6 P=1	15.8	9.4	20.6	12.7	75	
HS-36204M	270	136	HS-SA-085012	38	HS-36205	30	6.4	M20 P=1.5	28	109	M8 P=1.25	25.4	11	39.7	15.9	98	
HS-36204ML	300	136	HS-SA-085012	38	HS-36205	30	6.4	M20 P=1.5	28	109	M8 P=1.25	25.4	11	39.7	15.9	143	
HS-36224M	770	318	HS-SA-105015	66.8	HS-36225M	41	6.4	M27 P=2.0	39	169.5	M10 P=1.5	31.75	15.8	69	22	137	
HS-36202-MSS	STAINLESS STEEL 不銹鋼																
HS-36204-MSS	STAINLESS STEEL 不銹鋼																
HS-36224-MSS	STAINLESS STEEL 不銹鋼																

HS-304-CM AND HS-305-CM**HS-304-EM AND HS-305-EM****HS-304-HM AND HS-305-HM**

- ▶ Ductiles iron base (底座为铸钢)
- ▶ HS-304-HM and HS-305-HM have bushings and removable hardened ground pins.
手柄销轴孔装有耐磨套
- ▶ HANDLE OPENS (手柄开启角度)180°

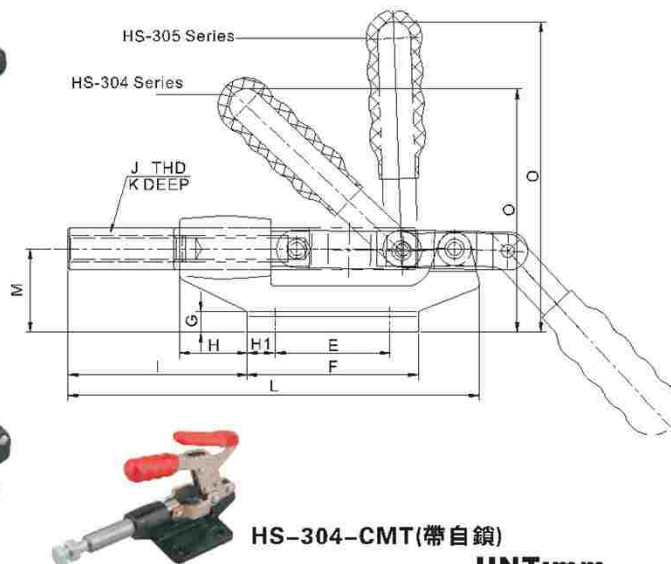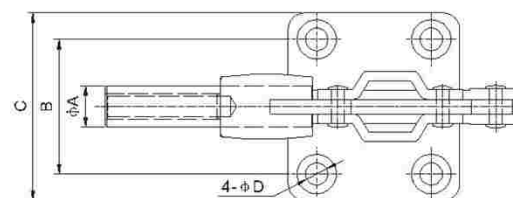


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	φ A	B	C	φ D	E	F	G	H	I	J	K	L	M	O	PLUNGER STROKE
HS-304-CM(T)	340	227	HS-SA-085012	12.7	41.4	57.2	6.7	35	52.4	4.8	20.6	52.4	M8 P=1.25	30.2	125.4	25.4	74.6	32
HS-305-CM	340	227		12.7	41.4	57.2	6.7	35	52.4	4.8	20.6	52.4	M8 P=1.25	30.2	125.4	25.4	90.5	
HS-304-EM	580	386	HS-SA-105015	16	41.4	57.2	8.3	41.4	58.8	4.8	31.8	76	M10P=1.5	39.2	158.8	31.8	98.4	42
HS-305-EM	580	386		16	41.4	57.2	8.3	41.4	58.8	4.8	31.8	76	M10P=1.5	39.2	158.8	31.8	122.8	
HS-304-HM	1480	680	HS-SA-125017	19.2	50.8	71.4	8.3	50.8	73.2	6.4	50.8	120.8	M12 P=1.75	49.2	238.2	44.4	133.4	60
HS-305-HM	1480	680		19.2	50.8	71.4	8.3	50.8	73.2	6.4	50.8	120.8	M12 P=1.75	49.2	238.2	44.4	171.6	

UNT:mm

HS-304-EMSS STAINLESS STEEL

HS-30509M AND HS-30609M

- ▶ High strength steel construction and precisely broached body for square plunger, allow these clamps to be used as pin locating gauges.
- ▶ Hardened steel pins and bushing fitted at pivot points.
- ▶ Supplied with separate handle and base. Users can weld them at desired position.
- ▶ Clamps can be mounted by drilling holes on the base or be welded at a proper position.



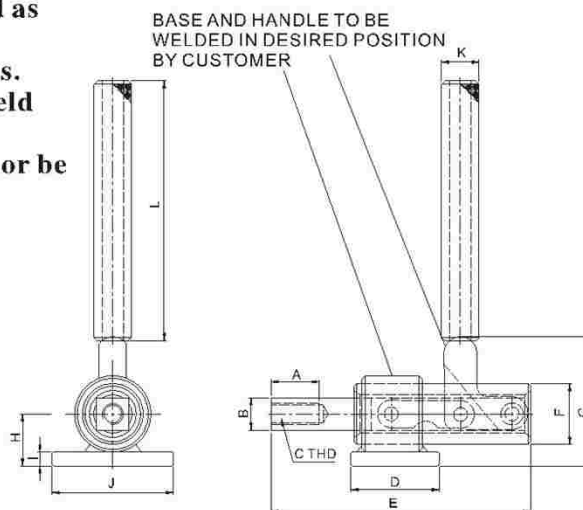
**HS-30509M**

UNT:mm



MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	PLUNGER STROKE	A	□B	C	D	E	F	G	H	I	J	φK	L
HS-30509M	1330	1136	HS-SA-125017	43.8	25.4	19	M12 P=1.75	50.8	148.8	35	78	30	8	70	21.7	152.4
HS-30609M	2820	2273	HS-SA-165020	59.5	38.1	25	M16 P=2	68.3	198	45	87	40	11.1	90.5	27.2	152.4

HS-30510M



- WEIGHT(自重): 1750g
- HOLDING CAPACITY(夾持力): 1100Kg
- SPINDLE SUPPLIED
(壓頭螺絲型号): HS-SA-125017
- HANDLE OPENS
(手柄开启角度): 105°
- PLUNGER STROKE(行程): 43mm

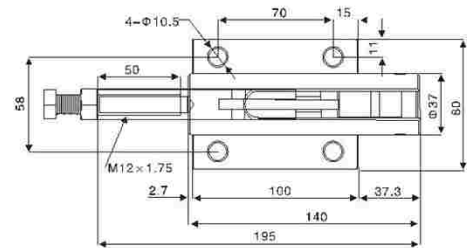**HS-30510M****HS-30510M****HS-30511M**

- WEIGHT(自重): 1300g
- HOLDING CAPACITY(夾持力): 1100Kg
- SPINDLE SUPPLIED
(壓頭螺絲型号): HS-SA-125017
- HANDLE OPENS
(手柄开启角度): 105°
- PLUNGER STROKE(行程): 43mm

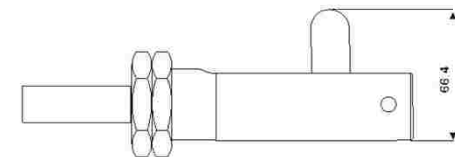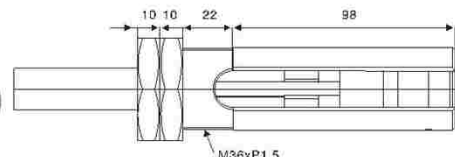**HS-30511M****HS-30511M****HS-30519M AND HS-30619M**

- High strength steel construction and precisely broached body for square plunger, allow these clamps to be used as pin locating gauges.
- Hardened steel pins and bushing fitted at pivot points.
- Supplied with separate handle and base. Users can weld them at desired position.
- Clamps can be mounted by drilling holes on the base or be welded at a proper position.

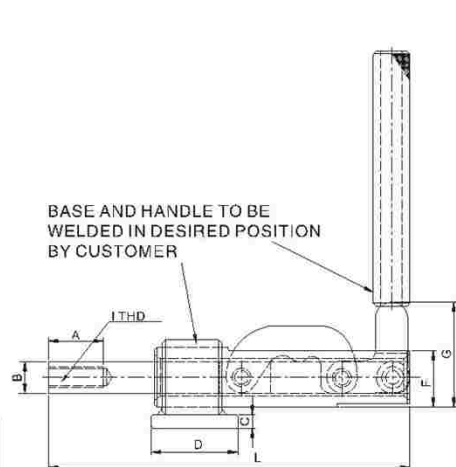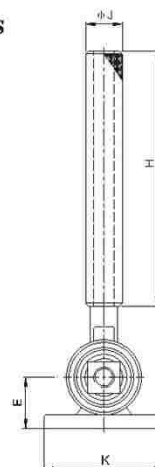
**HS-30519M****UNT:mm**

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	PLUNGER STROKE	A	B	C	D	E	F	G	H	I	φJ	K	L
HS-30519M	1640	1136	HS-SA-125017	59.5	25.4	19	8	50.8	30	35	74	152	M12 P=1.75	21.7	70	212
HS-30619M	3500	2273	HS-SA-165020	77.8	38.1	25	11.1	68.3	40	45	87	152	M16 P=2.0	27.2	90.5	283

HS-30600 AND HS-31200**HS-32500 AND HS-35000**

- ▶ Ductile iron base&handle.
- ▶ Case hardened pivots

底座和手柄为铸钢

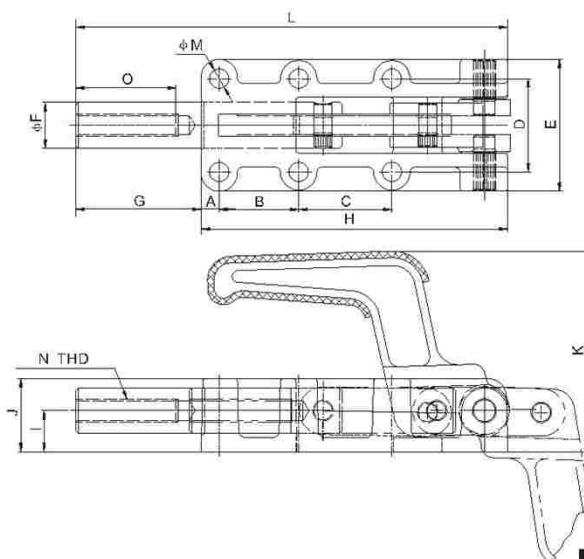**HS-31200**

UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	HANDLE OPENS	PLUNGER STROKE	A	B	C	D	E	φF	G	H	I	J	K	L	φM	N	O
HS-30600	510	600	HS-SA-086512	185°	32	25	36.5	-	33.4	46	14	38	89	12	22	67	127	5.5	M8 P=1.25	30
HS-31200	1500	1200	HS-SA-107515	185°	50	8	35	41	41	58	20	55	135	18	32	88	190	8.5	M10 P=1.5	40
HS-32500	3600	2500	HS-SA-127517	185°	75	12	45	45	54	78	25	102	196	22	40	110	298	10.3	M12 P=1.75	60
HS-35000	6500	5000	HS-SA-167520	185°	100	12	70	70	57	84	30	138	254	28	50	123	392	10.3	M16 P=2	60

HS-30600HL**HS-31200HL****HS-32500HL****HS-35000HL**


- ▶ Ductile iron base.
- ▶ Optional toggle press frame

底座为铸钢,顶轴经过热处理

▶ HS-30600MB available.



▶ HS-31200MB available

HS-32500MB available

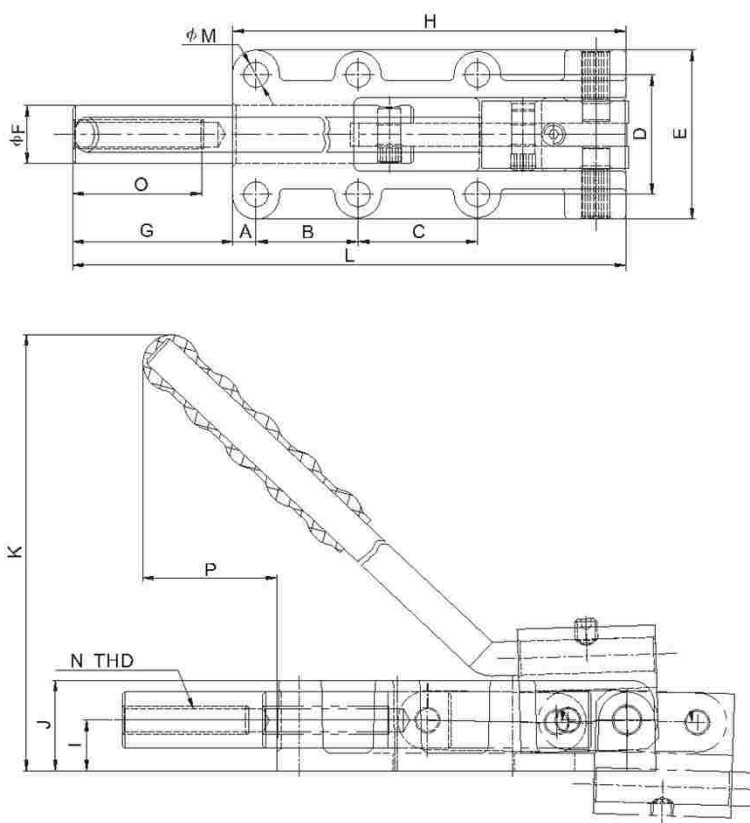**HS-31200HL**

UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	HANDLE OPENS	PLUNGER STROKE	A	B	C	D	E	φF	G	H	I	J	K	L	φM	N	O	P
HS-30600HL	610	600	HS-SA-086512	185°	32	25	36.5	-	33.4	46	14	38	89	12	22	65	127	5.5	M8 P=1.25	30	65
HS-31200HL	1500	1200	HS-SA-107515	185°	50	8	35	41	41	58	20	55	135	18	32	200	135	8.5	M10 P=1.5	40	100
HS-32500HL	4150	2500	HS-SA-127517	185°	75	12	45	45	54	78	25	102	196	22	40	278	298	10.3	M12 P=1.75	60	115
HS-35000HL	7100	5000	HS-SA-167520	185°	100	12	70	70	57	84	30	138	254	28	50	355	392	10.3	M16 P=2	60	172

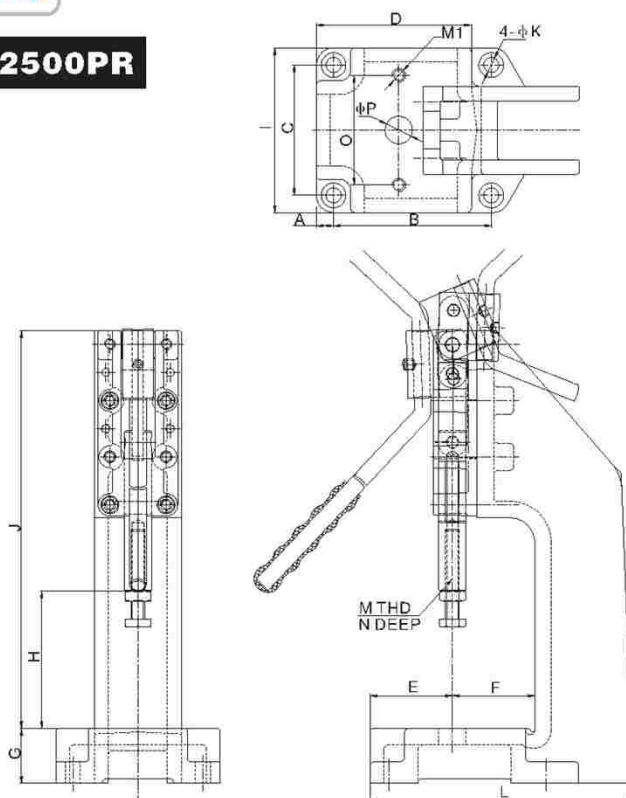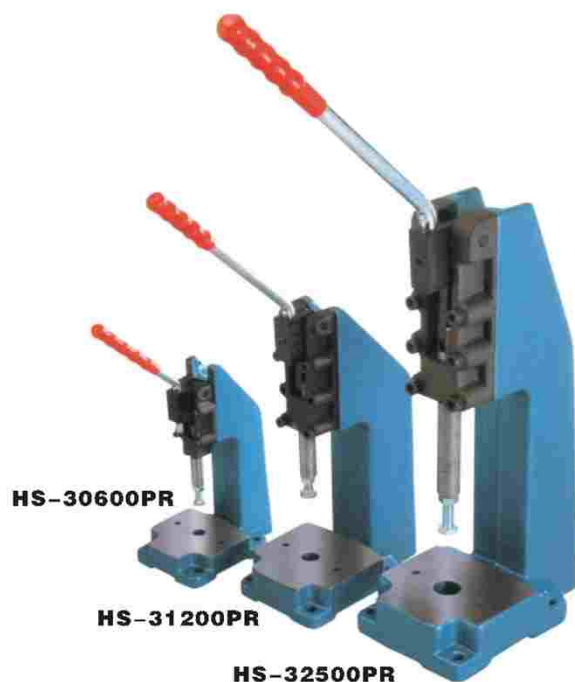HS-30600PR HS-31200PR HS-32500PR


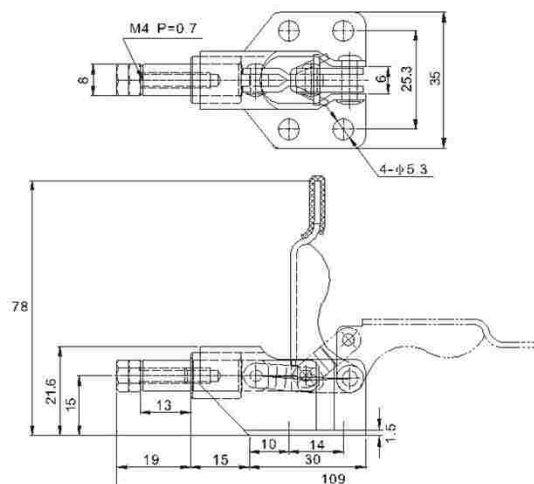
UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	HANDLE OPENS	PLUNGER STROKE	A	B	C	D	E	F	G	H	I	J	φK	L	M	N	φP	M1	O
HS-30600PR	3600	600	HS-SA-086512	185°	32	10	95	80	94	50	50	30	75	100	202	9	150	M8 P=1.5	30	15.6	M8*1.25	70
HS-31200PR	7350	1200	HS-SA-107515	185°	50	12.5	115	95	113	60	60	40	100	120	290	11.1	192	M10 P=1.5	40	20	M10*1.5	80
HS-32500PR	17920	2500	HS-SA-127517	185°	75	12.5	145	125	139	67	75	50	120	150	418	11	238	M16 P=2.0	60	30	M10*1.5	90

HS-36006

- WEIGHT(自重): 70g
- HOLDING CAPACITY(夹持力): 50Kg
- SPINDLE SUPPLIED(压头螺丝型号): HS-SA-041507
- HANDLE OPENS(手柄开启角度): 93°
- PLUNGER STROKE(行程): 11mm

HS-36006




UNT:mm

HS-36070

- WEIGHT(自重): 100g
- HOLDING CAPACITY(夹持力): 50Kg
- SPINDLE SUPPLIED(压头螺丝型号): HS-SA-051508
- HANDLE OPENS(手柄开启角度): 66°
- PLUNGER STROKE(行程): 10mm

HS-36070

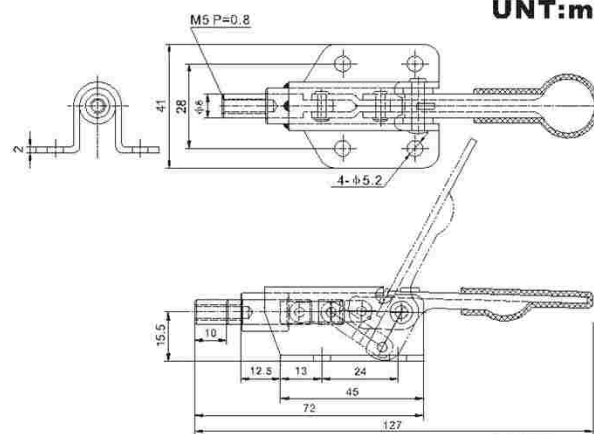

UNT:mm


HS-302-DM AND HS-30282M

- ▶ **Plunger locks in Extended Position Only.**
手柄下压为锁紧状态。

- ▶ **WEIGHT(自重):** 454g
▶ **HOLDING CAPACITY(夹持力):** 160Kg
▶ **HANDLE OPENS(手柄开启角度):** 45°
▶ **PLUNGER STROKE(行程):** 12mm

**HS-302-DM**

MODEL	DESCRIPTION
HS-302-DM	FLANGED BASE 法蘭底座
HS-30282M	STRAIGHT BASE 直底座
HS-302-DMSS	STAINLESS STEEL 不銹鋼

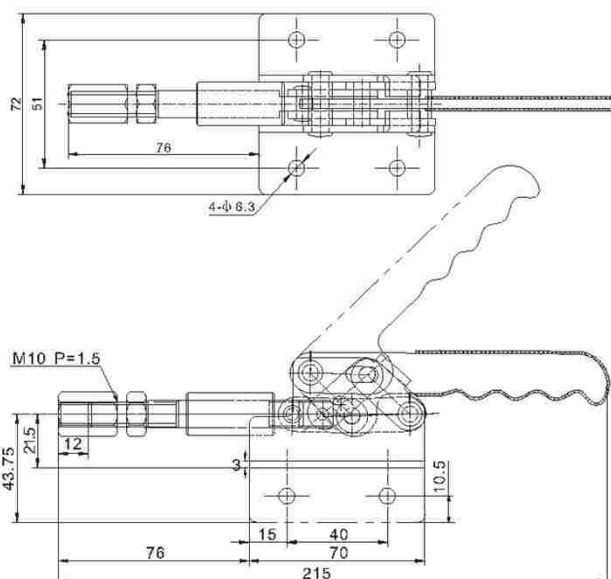

UNT:mm


HS-30290M AND HS-30292M

- ▶ **Plunger Locks in Extended Position Only.**
手柄下压为锁紧状态。

- ▶ **WEIGHT(自重):** 1270g
▶ **HOLDING CAPACITY(夹持力):** 295Kg
▶ **HANDLE OPENS(手柄开启角度):** 45°
▶ **PLUNGER STROKE(行程):** 23mm

**HS-30290M**

MODEL	DESCRIPTION
HS-30290M	FLANGED BASE 法蘭底座
HS-30292M	STRAIGHT BASE 直底座

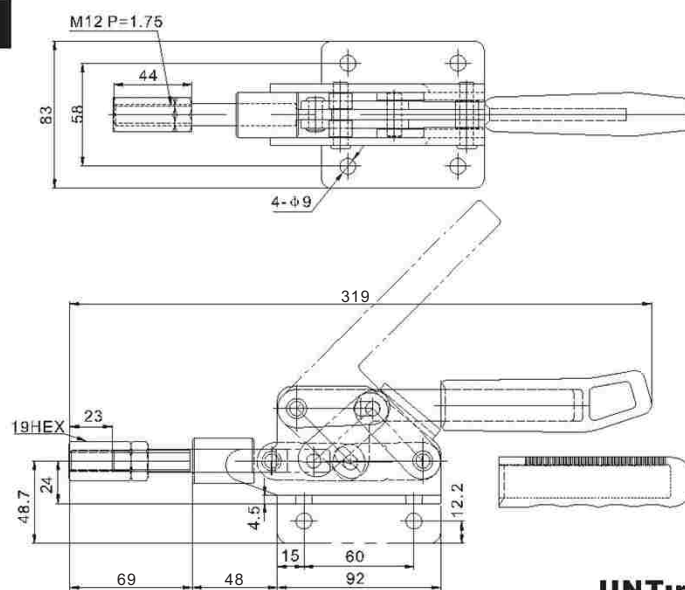


UNT:mm

HS-36020M AND HS-36020-K

- ▶ **HS-36020-K has a key way to keep the Plunger from rotating.**(HS-36020-K导筒上装有一个键, 防止顶轴转动)


- ▶ **WEIGHT(自重):** 345g
▶ **HOLDING CAPACITY(夹持力):** 180Kg
▶ **SPINDLE SUPPLIED(压头螺丝型号):** HS-SA-085012
▶ **HANDLE OPENS(手柄开启角度):** 144.5°
▶ **PLUNGER STROKE(行程):** 30mm

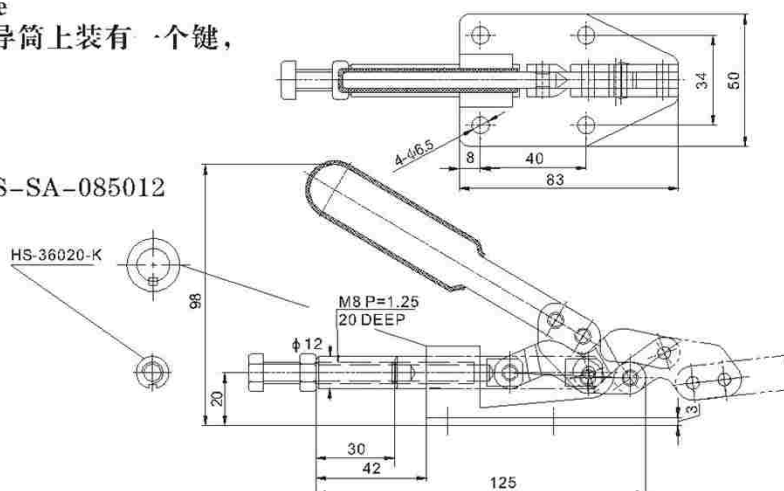**HS-36020M**

UNT:mm

HS-31501


- WEIGHT(自重): 355g
- HOLDING CAPACITY(夾持力): 200Kg
- HANDLE OPENS(手柄開啟角度): 190°
- PLUNGER STROKE(行程): 30mm

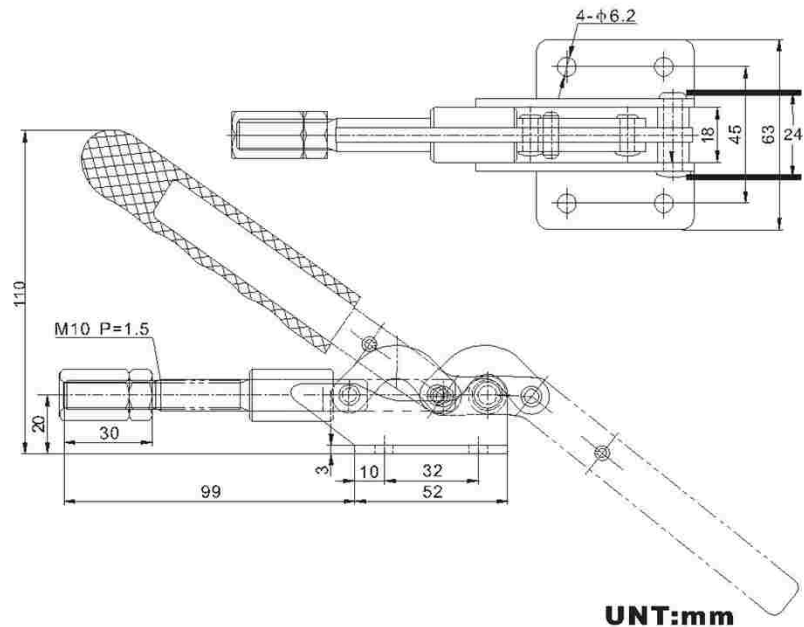**HS-31501**

UNT:mm

HS-36060


- Plunger Locks in Extended Position Only.
手柄下压为产品锁紧状态
- WEIGHT(自重): 615g
- HOLDING CAPACITY(夾持力): 300Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-083012
- HANDLE OPENS(手柄開啟角度): 76°
- PLUNGER STROKE(行程): 28mm

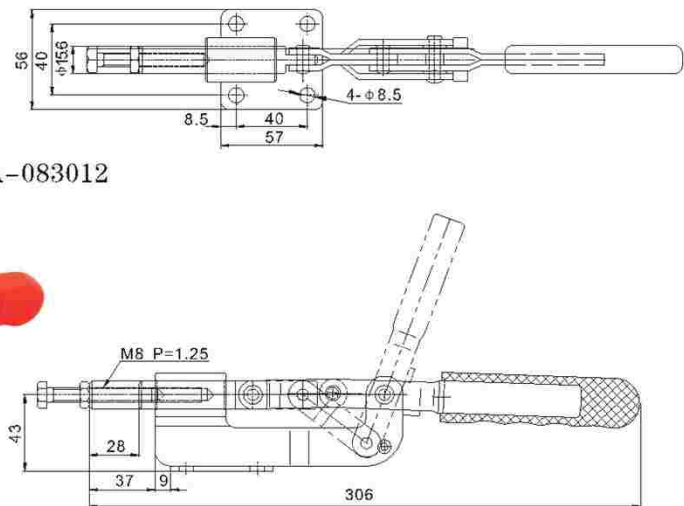**HS-36060**

UNT:mm

HS-303-EM AND HS-303-EMK



- HS-303-EMK has a key way to keep the Plunger from rotating. (HS-303-EMK導筒上裝有一個鍵, 防止頂軸转动)
- WEIGHT(自重): 965g
- HOLDING CAPACITY(夾持力): 454Kg
- HANDLE OPENS(手柄開啟角度): 190°
- PLUNGER STROKE(行程): 50mm

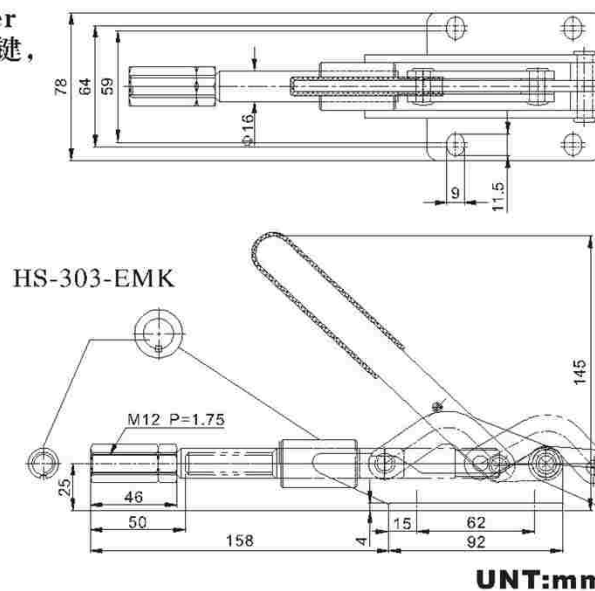HS-303-EM


UNT:mm

HS-30513

- Ductile iron base.(底座为铸钢)
- WEIGHT(自重): 4060g
- HOLDING CAPACITY(夹持力): 1600Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-185025
- HANDLE OPENS(手柄开启角度): 180°
- PLUNGER STROKE(行程): 76mm

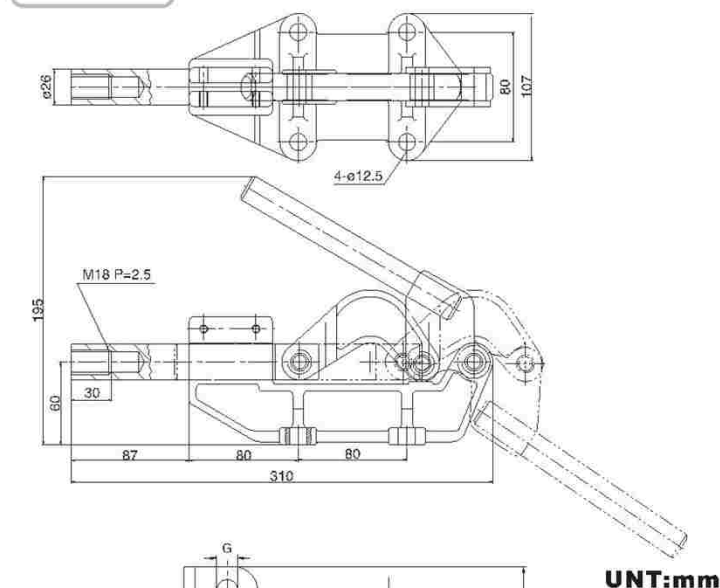
**HS-30513****HS-30250 AND HS-30450****HS-30250****HS-30450**

UNT:mm

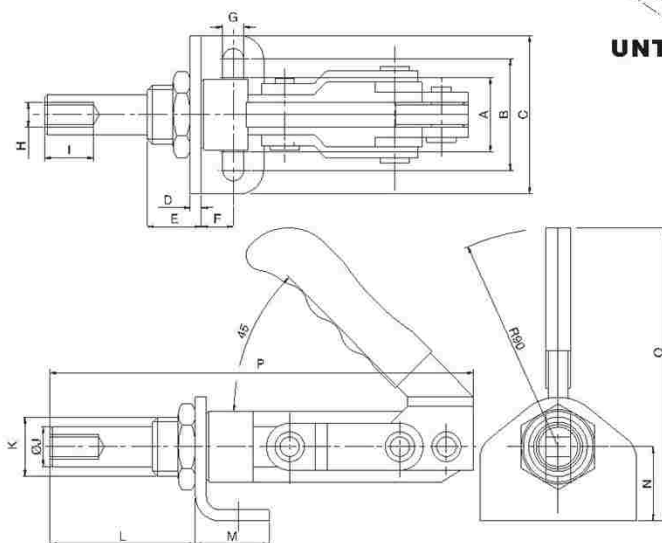

UNT:mm


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	HANDLE OPENS	PLUNGER STROKE	A	B	C	D	E	F	G	H	I	ØJ	K	L	M	N	O	P
HS-30250	385	250	HS-SA-062010	190°	32	30	42	57	4	17	10	6.5	M6 P=1.0	12	11	M20 P=1.5	51	23	25	85	136
HS-30450	774	450	HS-SA-103015	185°	38	30	45	64	4.5	22	13	8.5	M10 P=1.5	20	16	M24 P=1.5	59.5	30	30	120	173

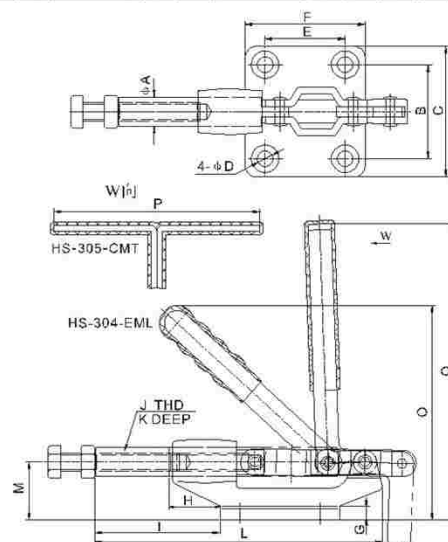HS-305-CMT AND HS-304-EML HS-305-HMY**HS-304-EML****HS-305-CMT****HS-305-HMY**


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	PLUNGER STROKE	A	B	C	D	E	F	G	H	I	J	K	L	M	O	P
HS-305-CMT	395	227	HS-SA-085012	32	12.7	41.1	57.2	6.7	35	52.4	4.8	20.8	54.8	M8 P=1.25	30.2	125.4	25.4	130	90
HS-304-EML	663	386	HS-SA-105015	42	16	41.1	57.2	8.3	41.1	58.8	4.8	31.8	76	M10 P=1.5	39.5	158.2	31.8	136.3	-
HS-305-HMY	1600	680	HS-SA-125017	60	19.2	50.8	71.4	8.3	50.8	73.2	6.4	50.8	119.8	M12 P=1.75	49.2	235	44.4	218	126

HS-301-CR AND HS-301-CL

- WEIGHT(自重): 56g
- HOLDING CAPACITY(夾持力): 40Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-042007
- HANDLE OPENS(手柄開啟角度): 180°
- PLUNGER STROKE(行程): 16.4mm

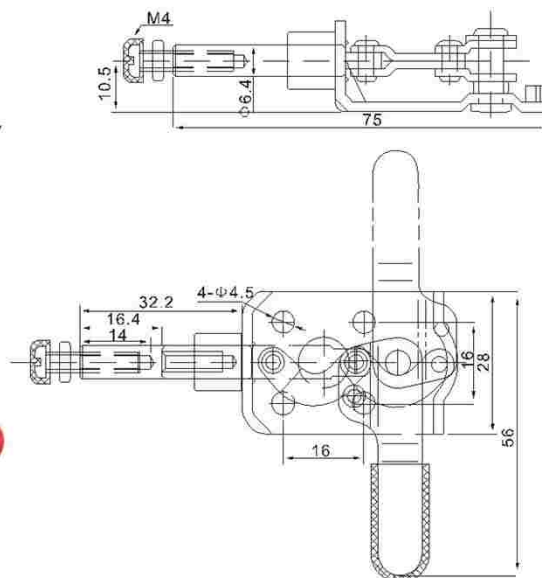**HS-301-CR****HS-301-CL****HS-305-BM**

- WEIGHT(自重): 480g
- HOLDING CAPACITY(夾持力): 180Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-085012
- HANDLE OPENS(手柄開啟角度): 185°
- PLUNGER STROKE(行程): 33.8mm


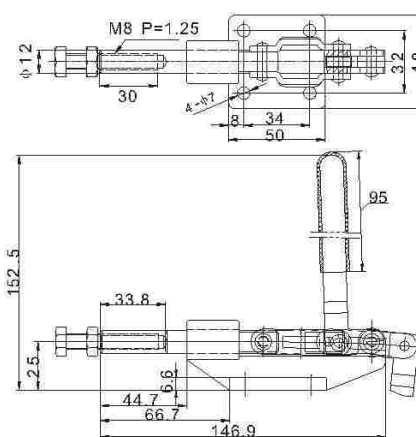
**HS-305-BM**

UNT:mm

HS-36330ML


*Ductiles iron base(底座為鑄鋼)

- WEIGHT(自重): 1250g
- HOLDING CAPACITY(夾持力): 350Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-085012
- HANDLE OPENS(手柄開啟角度): 185°
- PLUNGER STROKE(行程): 78mm

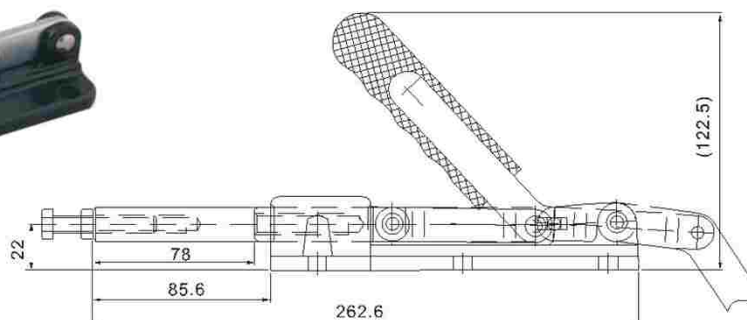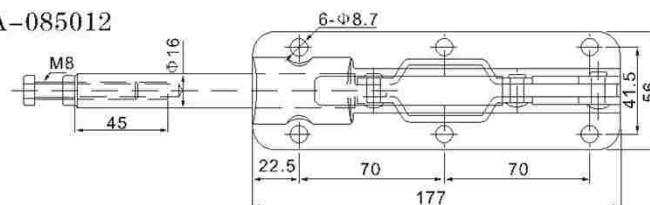**HS-36330ML**


HS-302-CL AND HS-302-CR

- WEIGHT(自重): 60g
- HOLDING CAPACITY(夾持力): 82kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-064410
- BAR OPENS (壓把開啓角度): 180°
- PLUNGER STROKE(行程): 20mm

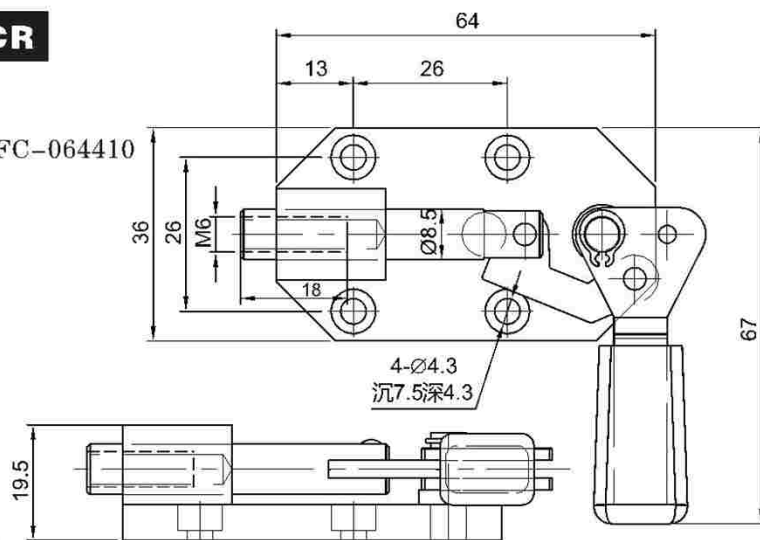


HS-36015-T

- WEIGHT(自重): 150g
- HOLDING CAPACITY(夾持力): 255kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-FC-064410
- BAR OPENS (壓把開啓角度): 180°
- PLUNGER STROKE(行程): 17.8mm

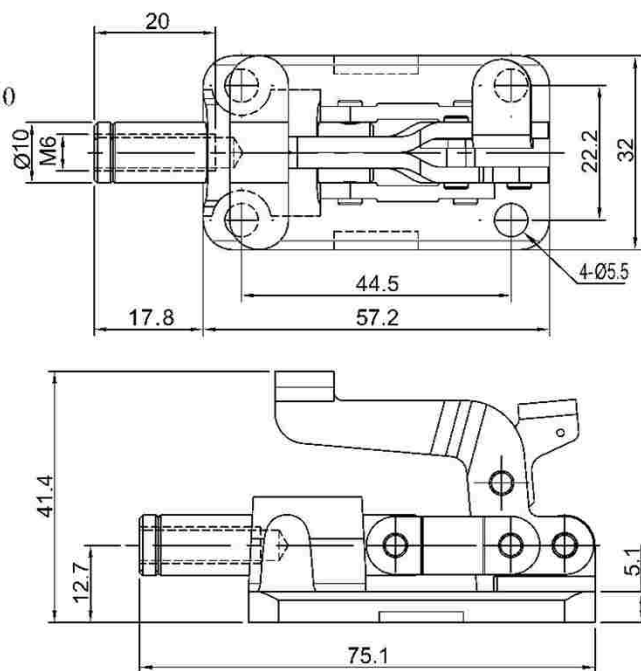**HS-304-HMY**

- WEIGHT(自重): 1600g
- HOLDING CAPACITY(夾持力): 680kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-125017
- BAR OPENS (壓把開啓角度): 180°
- PLUNGER STROKE(行程): 60mm

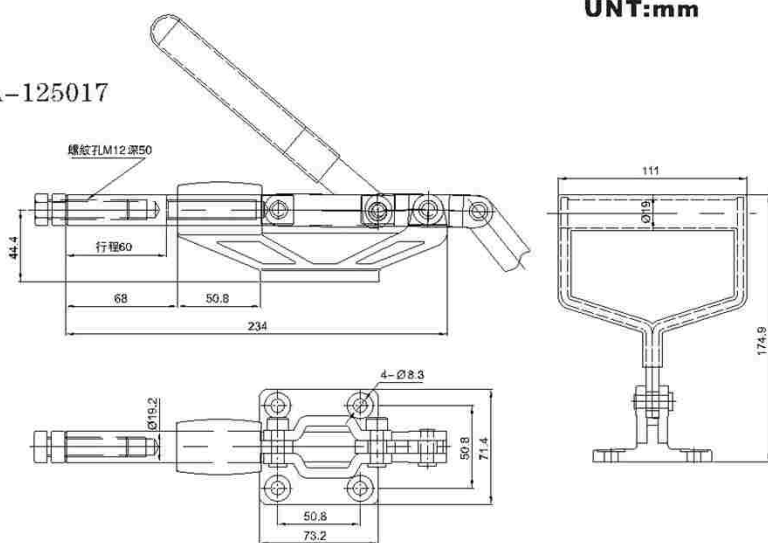


HS-40341-R(帶自鎖)

- WEIGHT(自重): 791g
- HOLDING CAPACITY(夾持力): 900kg



HS-40341-R(帶自鎖)

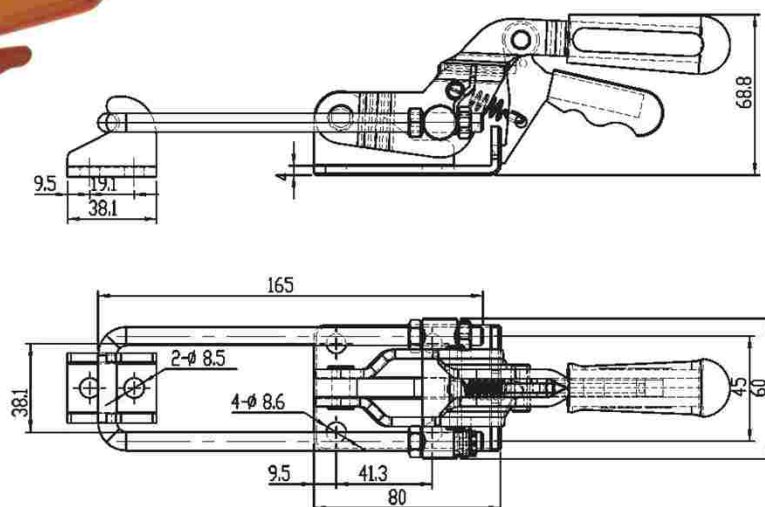

UNT:mm

HS-40360-ST AND HS-40370-LP



- ※Forged alloy steel handle and base(手柄和底座爲鍛造合金鋼)
※Optional latch plate available:HS-40370-LP

- WEIGHT(自重): 1610g
- HOLDING CAPACITY(夾持力): 3400kg
- HS-40360-ST U Bolt $\phi 1/2$




HS-40370-LP

HS-40360-ST

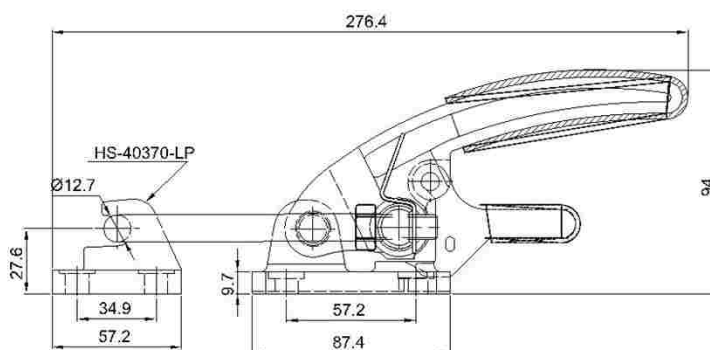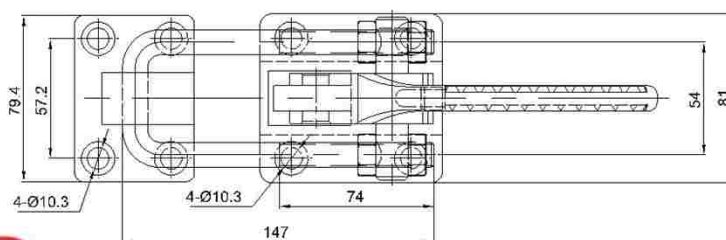


UNT:mm

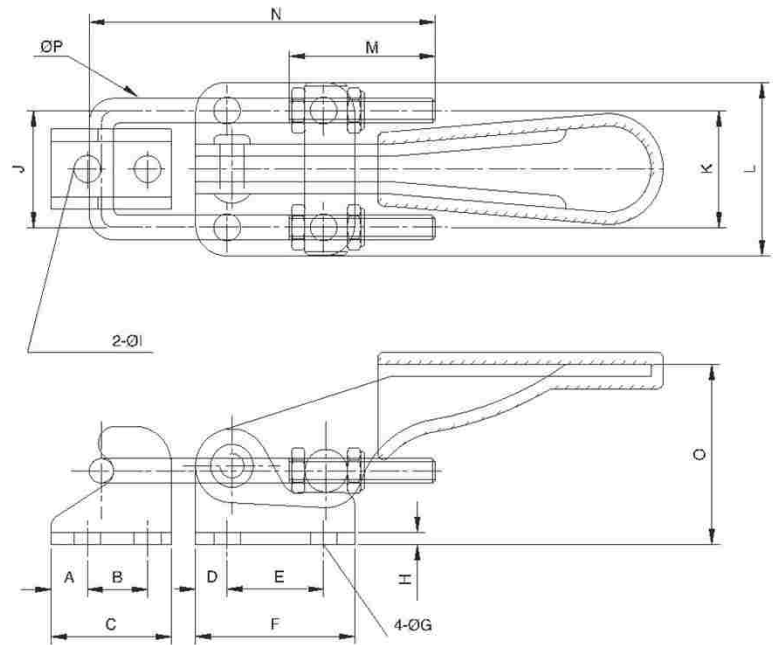HS-40323**HS-431****HS-40341****HS-431**


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	A	B	C	D	E	F	ØG	H	ØI	J	K	L	M	N	O	P
HS-40323	70	163	6	9.9	19.8	5.2	15.9	26.2	4.4	2	4.4	19	19	28.2	24	57	29.3	4
HS-431	225	318	6.8	11.5	25.4	6.4	19	39.7	6.7	3.2	6.3	31.8	26.6	44.4	38	87	41.3	5
HS-40341	680	900	9.5	19.1	38.1	9.5	41.3	60.3	8.6	4	8.5	38.1	44.5	54	52	114.5	74	8
HS-40323-SS			STAINLESS STEEL 不銹鋼															
HS-431M-SS																		
HS-40341-SS																		

UNT:mm

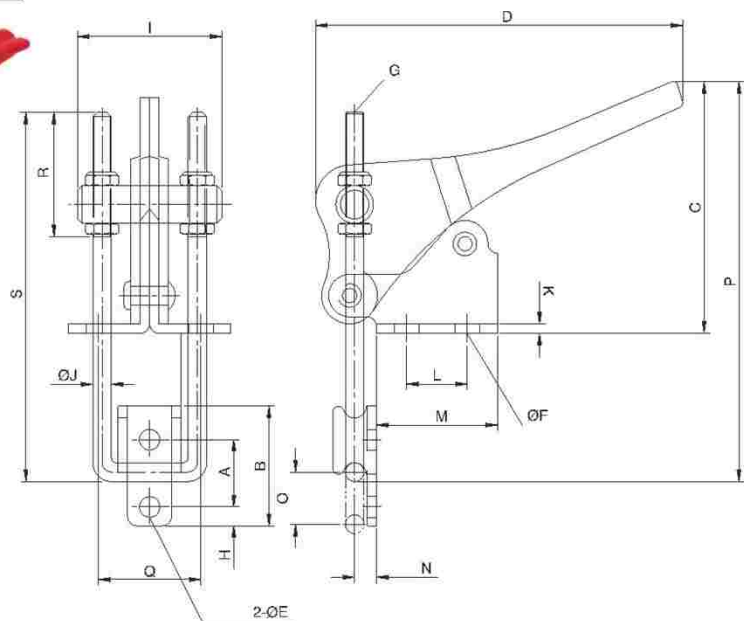HS-40324 THRU HS-40344**HS-40344 (加长)****HS-40334SS-T**
(不銹鋼、帶自鎖)**HS-40324**

UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	A	B	C	D	ØE	ØF	G	H	I	ØJ	K	L	M	N	O	P	Q	R	S
HS-40324	113	225	14.3	25.4	53.3	79	4.4	5.3	M4 P=0.7	4	31	4	2	13	26	4.7	11.1	70	22	26.5	78.5
HS-40334	250	450	20.6	38.1	61.9	120	7.1	7.1	M6 P=1	7.1	41.3	6.35	3	19.1	33.3	8.7	17.5	102	25.4	40.5	114
HS-40344	700	900	27	54	84.1	130.2	8.7	5.3	M8 P=1.25	9.5	60.3	7.9	4	31.8	47.6	12.7	28.6	150	36.5	58	154
HS-40324-SS			STAINLESS STEEL 不銹鋼																		
HS-40334-SS(T)																					
HS-40344-SS																					

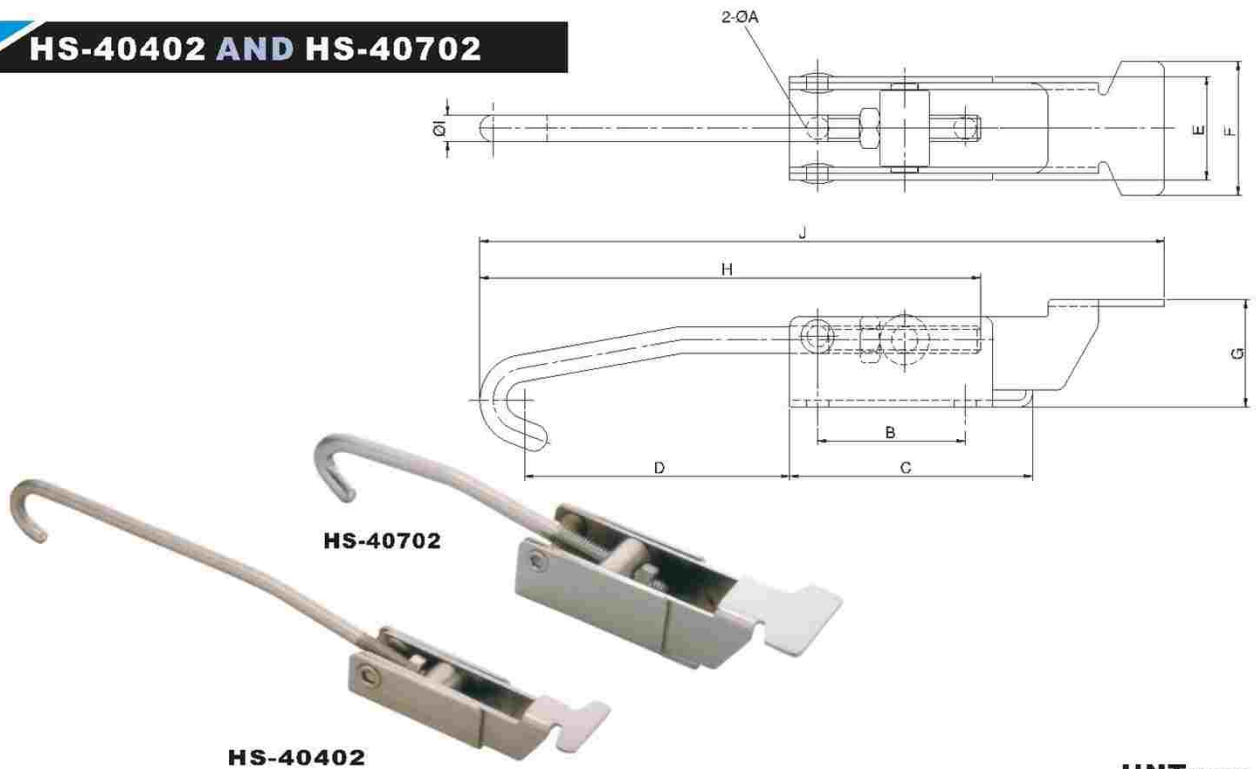
HS-40402 AND HS-40702

UNT:mm

MODEL	WEIGHT(g)	ØA	B	C	D	E	F	G	H	ØI	J
HS-40402	130	6.5	36	85	86.83	20	28	23	140	6	183.7
HS-40702	245	6.7	44.5	73.2	79.96	31	40	32	151.06	8	206.5
HS-40402-SS	STAINLESS STEEL 不銹鋼										

HS-40820 AND HS-40840 AND HS-40870

- Two function. (两个功能,垂直和水平方向都可锁死)
- Latch for vertical or horizontal are available.

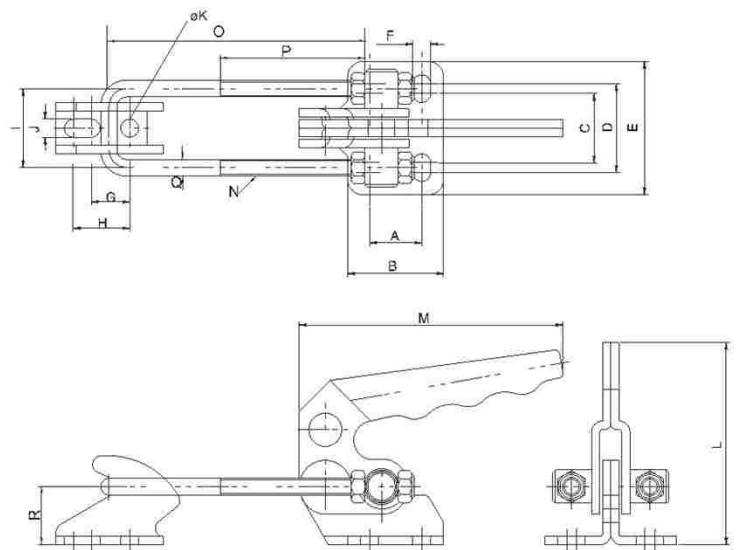


UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
HS-40820	120	200	13	26	19	24	36	5.2	11	16	21	5.2	5.2	46	65	M4x0.7	92	55	4	12.9
HS-40840	306	400	19	35	25	32	48	6.5	14	20.6	28.5	6.5	6.5	73	97	M5x1.0	113.5	70	6	21
HS-40870	700	700	32	50.5	36	45	63.5	8.5	19	28	44.5	8.5	8.5	88	117	M8x1.25	150	85	8	24.4

HS-43101


- WEIGHT(自重): 310g
- HOLDING CAPACITY(夾持力): 170Kg

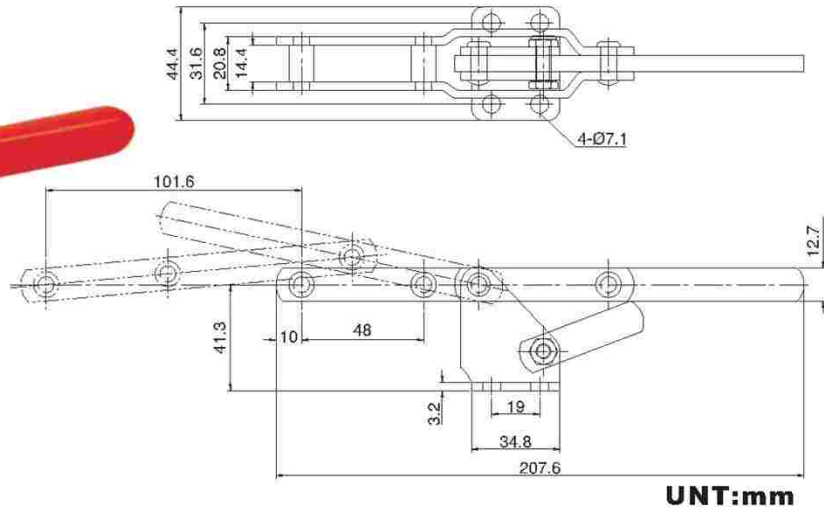**HS-43101**


UNT:mm

HS-40200

- WEIGHT(自重): 155g
- HOLDING CAPACITY(夾持力): 200Kg

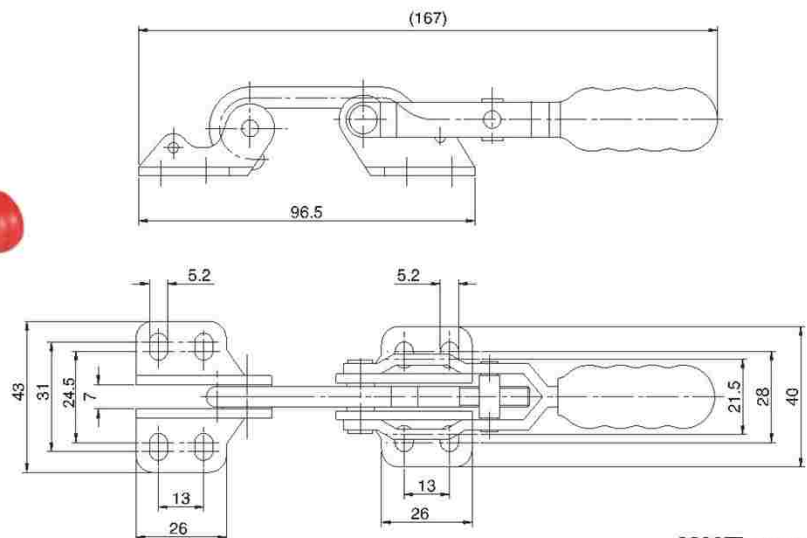**HS-40200**

UNT:mm

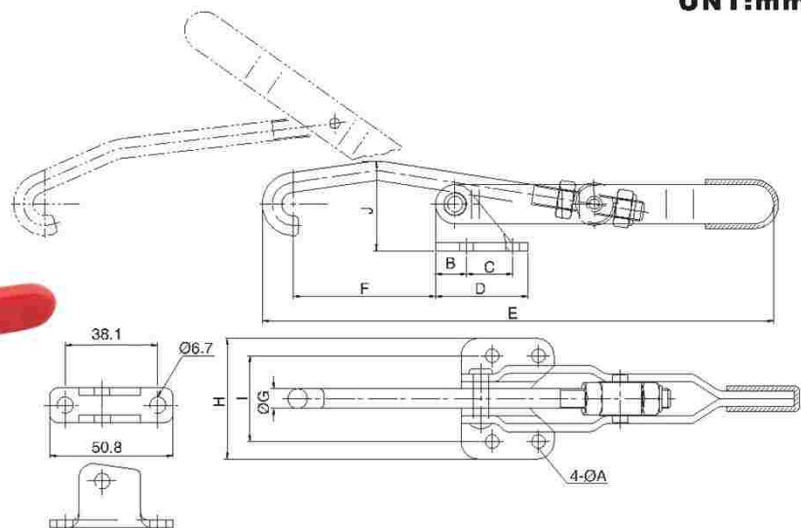HS-451 AND HS-452**HS-40371 AND HS-43810****HS-452**

HS-452 BASE

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	DESCRIPTION	ØA	B	C	D	E	F	ØG	H	I	J
HS-451	270	170	FLANGED BASE	5.6	12.7	19	38.1	211	58.4	8	49.2	34.9	36.5
HS-452	255	170	NARROW BASE	6.7	—	38.1	50.8	211	44.75	8	—	—	36.5
HS-40371	624	340	FLANGED BASE	8.7	7.9	31.8	47.6	285	79.4	9.5	65.7	49.2	57.3
HS-43810	1130	450	FLANGED BASE	10.3	12.7	28.6	54	336	76.2	12.7	85.7	60.3	68
HS-451-SS	STAINLESS STEEL 不銹鋼												
HS-452-SS	STAINLESS STEEL 不銹鋼												


UNT:mm

HS-40370 AND HS-40370-LP

- **Forged alloy steel base(HS-40370)底座为锻造合金钢)**
 - **Optional latch plate available:HS-40370-LP**
 - **WEIGHT(自重): 1260g**
 - **HOLDING CAPACITY(夹持力): 1818Kg**
 - **HS -40370-LP Ductile iron**
 - **HS -40370-U Bolt $\phi 3/8$**
- 
- Technical drawing of the HS-40370-LP latch plate showing dimensions 79.4 and 57.2.



HS-40370-LP HS-40370

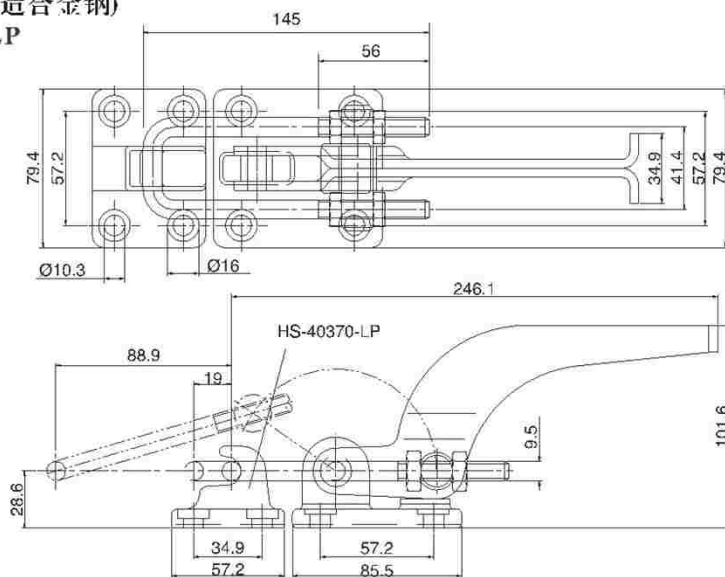


UNT:mm

HS-40380 AND HS-40380-SS

- **Forged alloy steel base(HS-40380底座为锻造合金钢)**
- **Optional latch plate available:HS-40370-LP**
- **WEIGHT(自重): 1480g**
- **HOLDING CAPACITY(夹持力): 3400Kg**
- **HS -40380-SS & LATCH PLATE are stainless steel**
- **HS -40380 U Bolt ϕ 1/2**



HS-40370-LP HS-40380

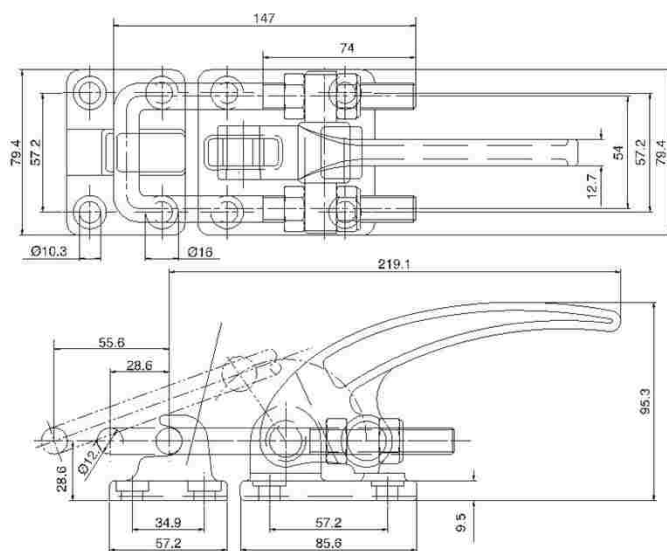


UNT:mm


HS-40390 AND HS-40392



HS-40390

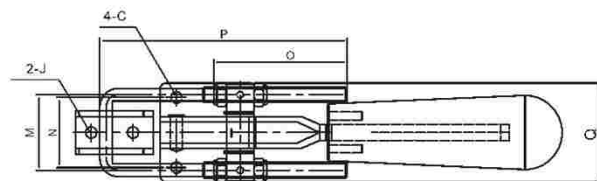


HS-40390

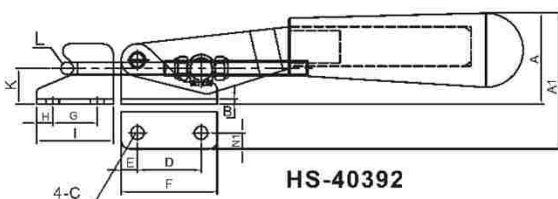[illegible]



HS-40392




HS-43110 AND HS-43120

- WEIGHT(自重):180g
- HOLDING CAPACITY(夾持力):170kg
- HS-43110 Supplied with M6 P=1.0 hook bolt.
- HS-43120 Supplied with HS-SA-065010 hex head spindle assembly.

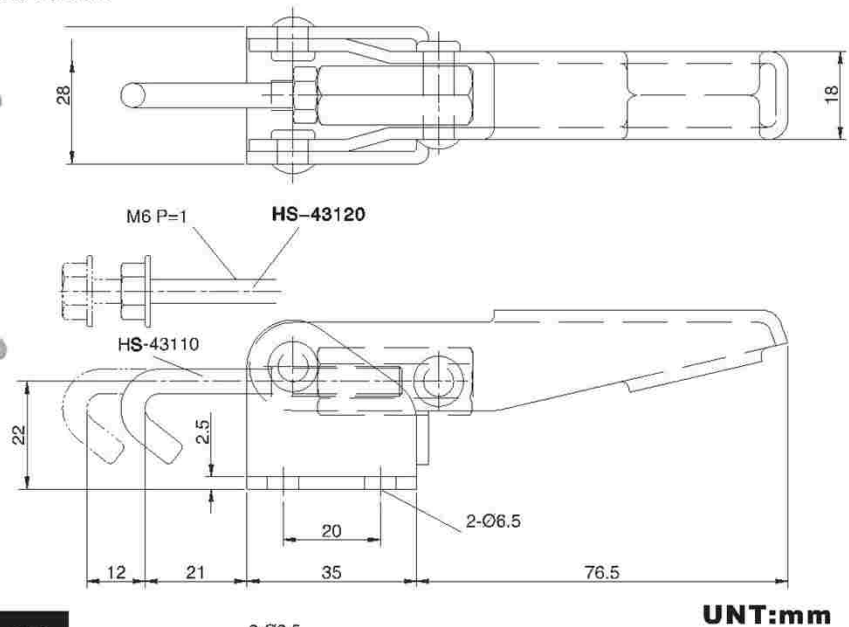**HS-43110****HS-43120****HS-43150 AND HS-43160**


- WEIGHT(自重):385g
- HOLDING CAPACITY(夾持力):300kg
- HS-43150 Supplied with M10 P=1.5 hook bolt.
- HS-43160 Supplied with HS-SA-107515 hex head spindle assembly.

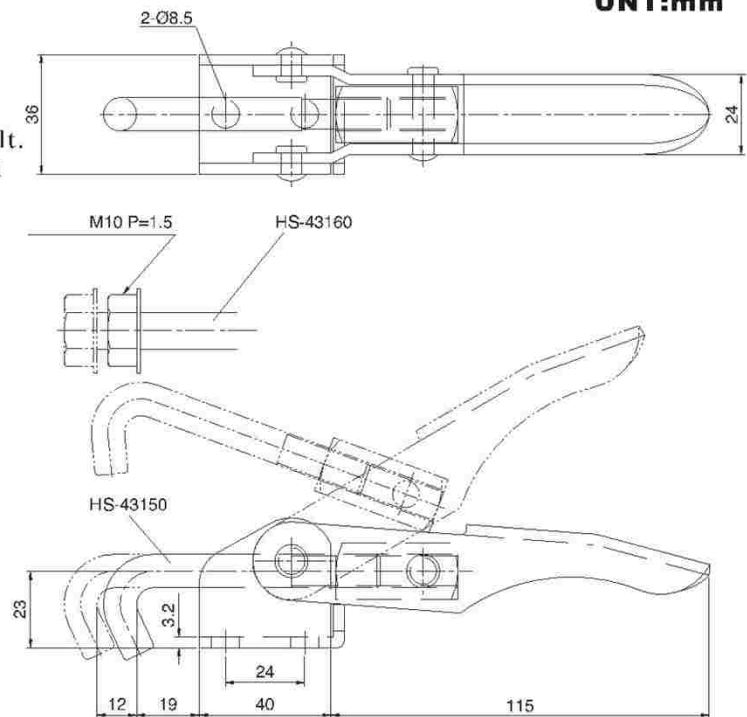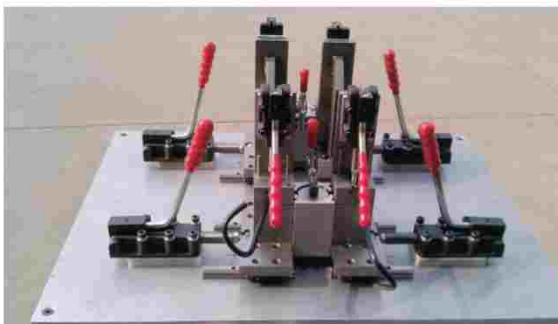**HS-43150****HS-43160****UNT:mm**

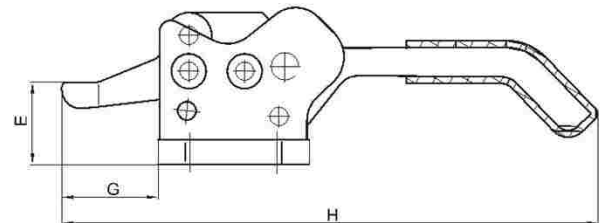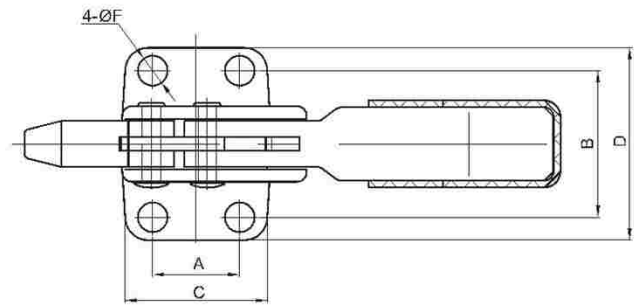HS-40550 AND HS-40580**HS-40550**

UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	A	B	C	D	E	Φ F	G	H	I
HS-40550	200	110	19	32	31	42	17.5	6.5	22	116	33
HS-40580	940	220	35	51	62	68	25	8.5	40	222	52.8

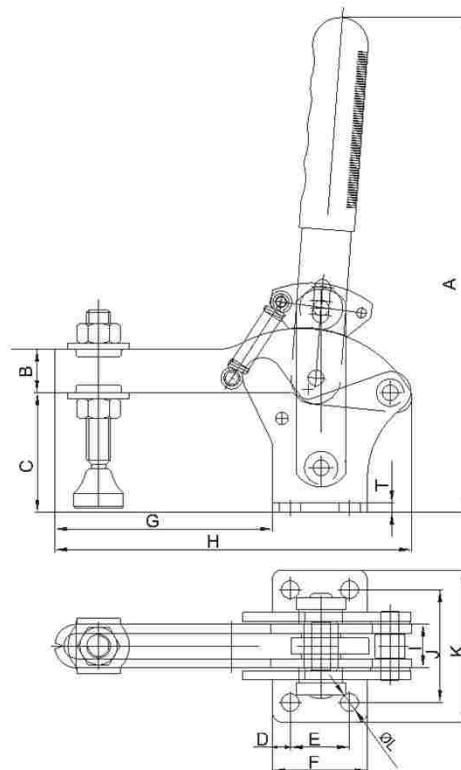
HS-60130 AND HS-60131**HS-60130**

UNT:mm


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS	A	B	C	D	E	F	G	H	I	J	K	Φ L	T
HS-60130	680	250	HS-SF-38300	70°	165°	220	19	39	6.5	22	35	58	118	20	48	62	8	4
HS-60131	1590	350	HS-SF-12400	85°	170°	250	22	60	9	30	48	95	178	25	57	77	9	4.5

HS-50350


- WEIGHT(自重): 185g
- HOLDING CAPACITY(夾持力): 90Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-14112

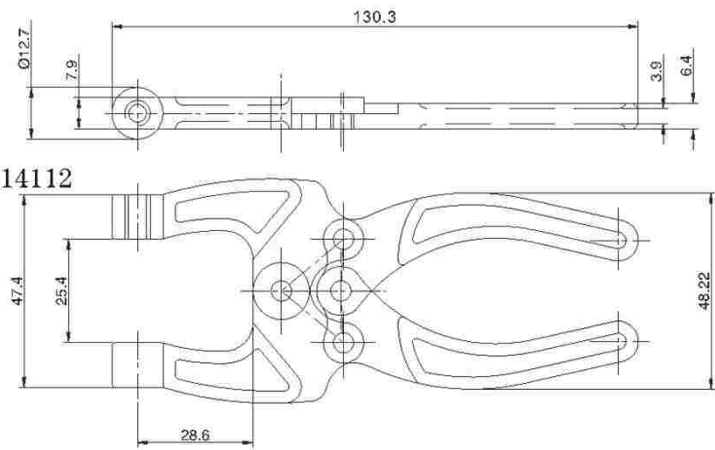**HS-50350-1**


- WEIGHT(自重): 185g
- HOLDING CAPACITY(夾持力): 90kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-14112

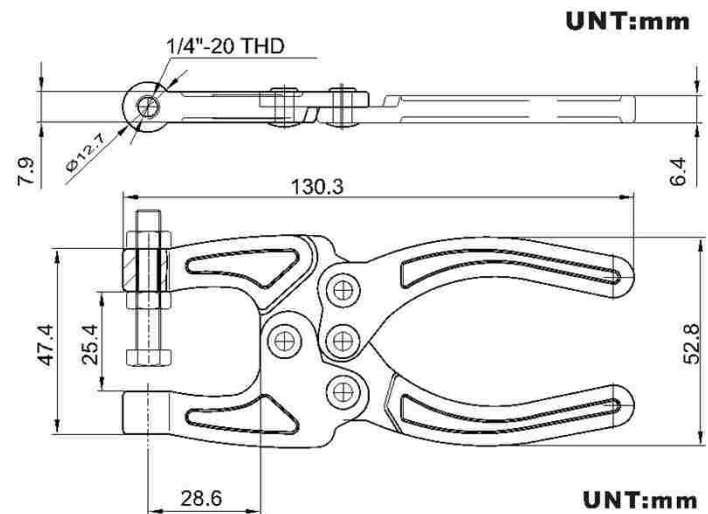**HS-50360**

- WEIGHT(自重): 290g
- HOLDING CAPACITY(夾持力): 159Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-56200

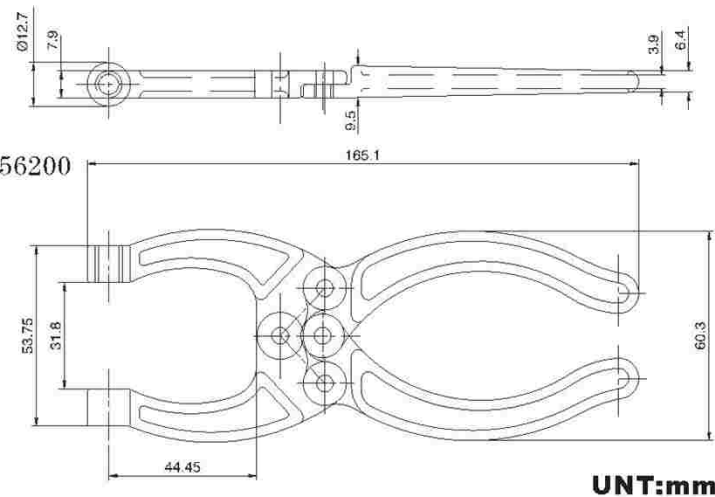**HS-50380**


- WEIGHT(自重): 660g
- HOLDING CAPACITY(夾持力): 318Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SF-38300

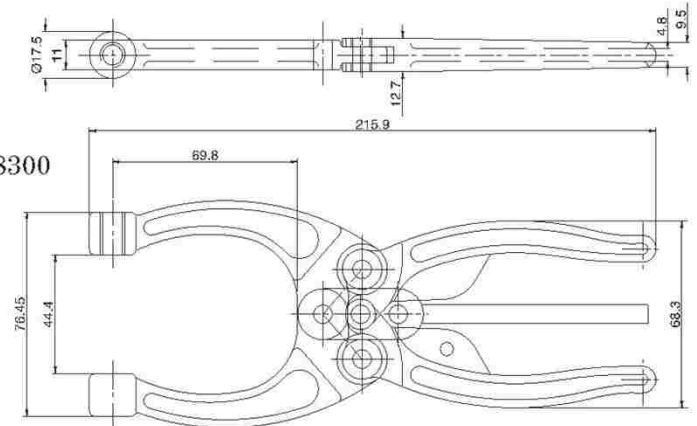


UNT:mm

HS-50385


- WEIGHT(自重): 710g
- HOLDING CAPACITY(夾持力): 820Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-38114

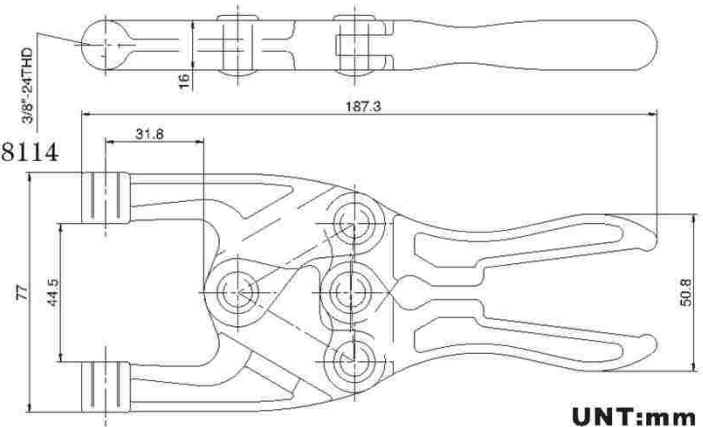**HS-50450**


- WEIGHT(自重): 740g
- HOLDING CAPACITY(夾持力): 318Kg
- SPINDLE SUPPLIED(壓頭螺絲型號): HS-SA-38300

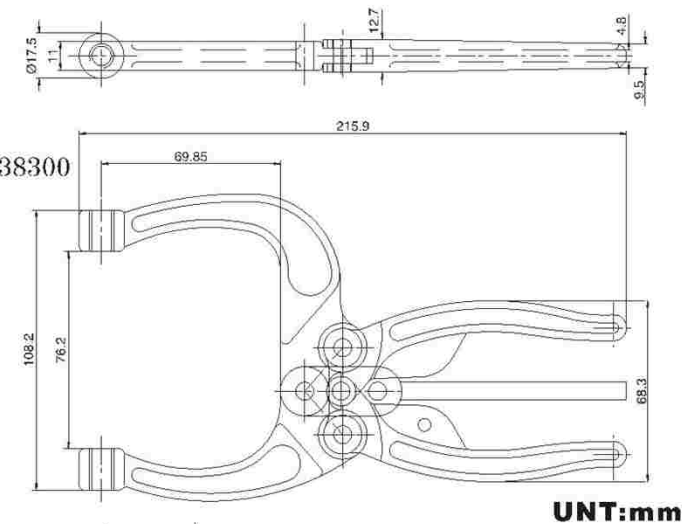**HS-50480**

- 2 stub jaws for easy linking to special jaw extensions.
- WEIGHT(自重): 600g
- HOLDING CAPACITY(夾持力): 500kg


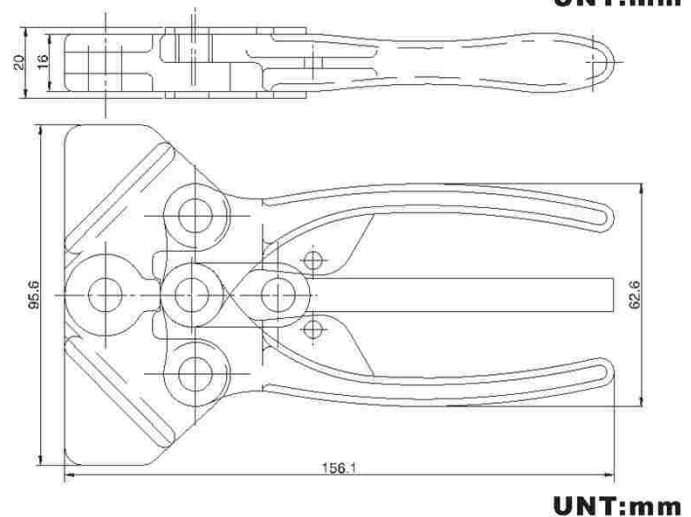
**HS-51105**

- WEIGHT(自重): 180g
- HOLDING CAPACITY(夾持力): 102kg

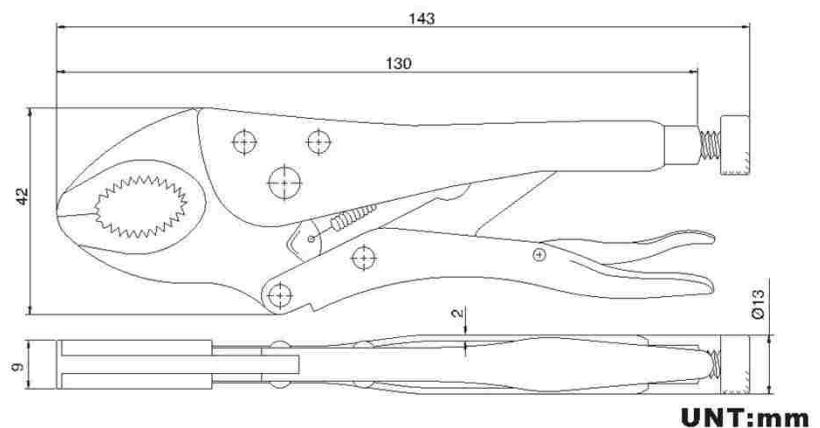

HS-51106


- WEIGHT(自重): 190g
- HOLDING CAPACITY(夾持力): 102kg

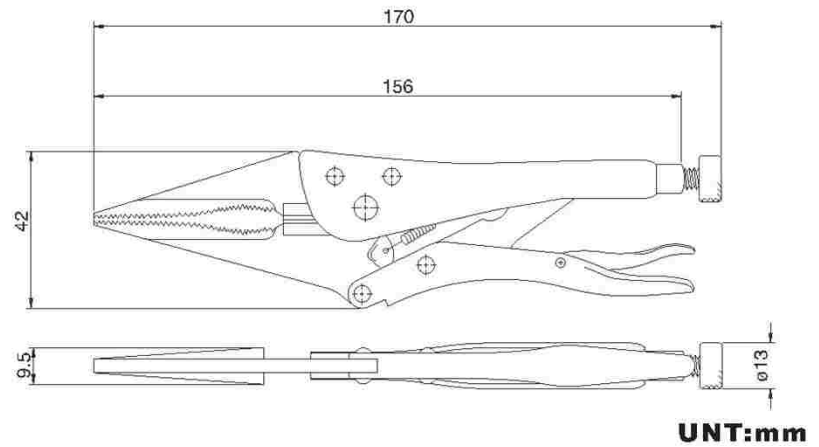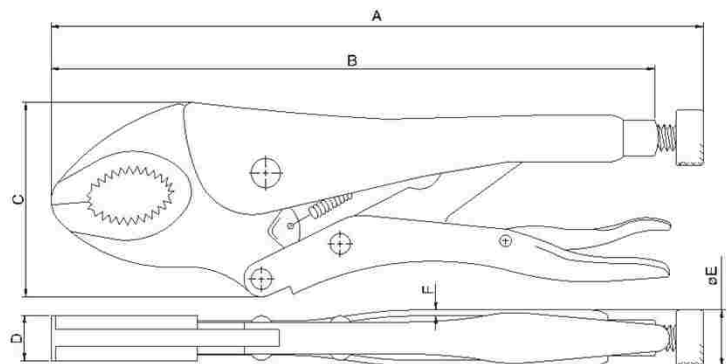**HS-51150 AND HS-51152**


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	A	B	C	D	ØE	F
HS-51150	340	350	190	175	52.5	11	16.5	2
HS-51152	520	400	228	211	63	11	19	2

HS-51151

- WEIGHT(自重): 520g
- HOLDING CAPACITY(夾持力): 580Kg

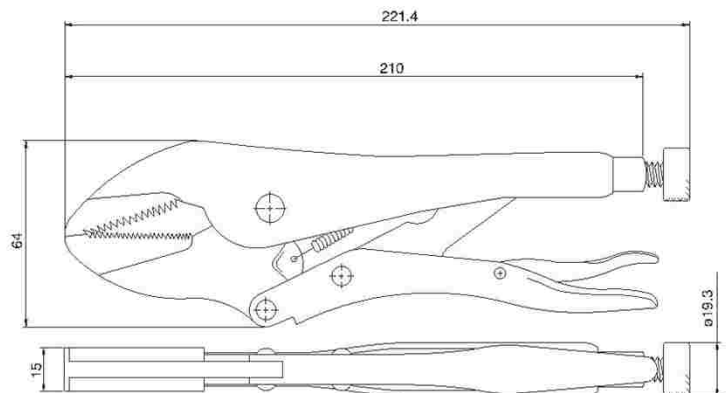
**HS-51100**

- WEIGHT(自重): 850g
- HOLDING CAPACITY(夾持力): 350Kg

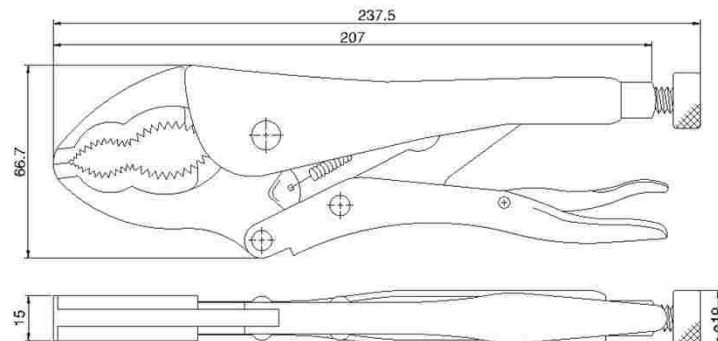

HS-51010

- WEIGHT(自重): 475g
- HOLDING CAPACITY(夾持力): 250Kg
- SPINDLE SUPPLIED
(壓頭螺絲型號): HS-SA-56112

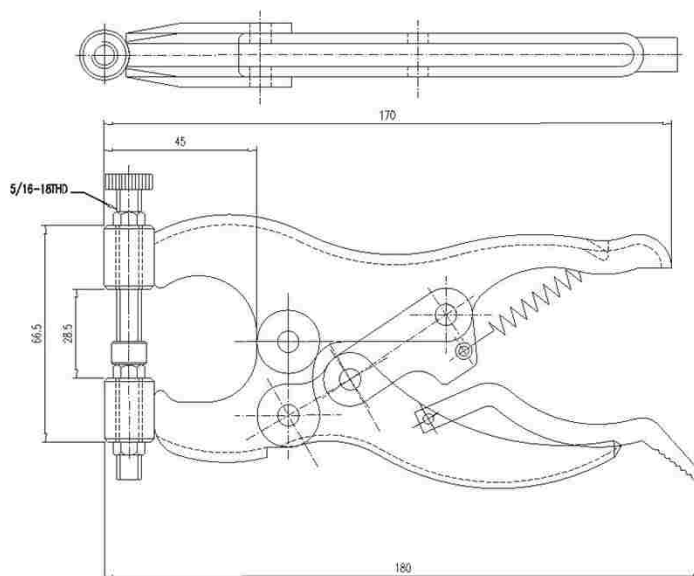


UNT:mm

HS-51020

- WEIGHT(自重): 655g
- HOLDING CAPACITY(夾持力): 300Kg



3/8"-16THD

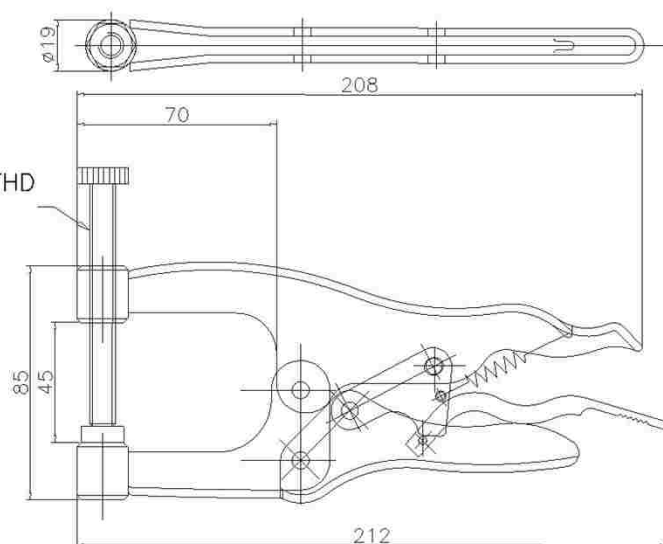


UNT:mm

HS-51030

- WEIGHT(自重): 840g
- HOLDING CAPACITY(夾持力): 260Kg



7/16"-14THD

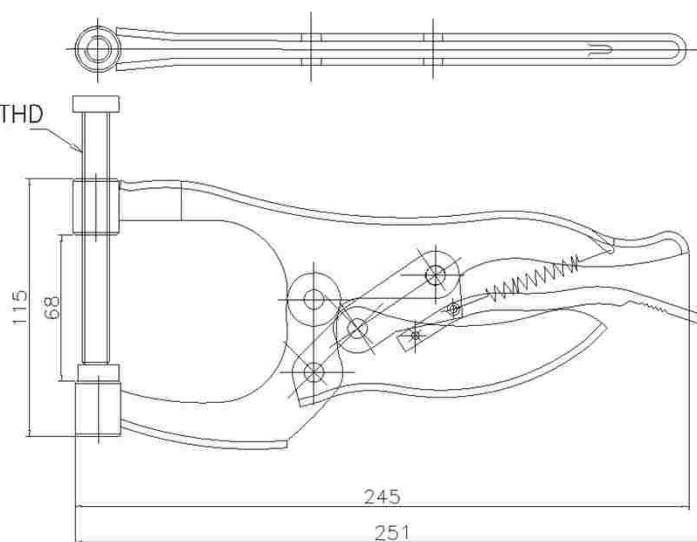

UNT:mm

HS-70305 AND HS-70310 AND HS-70315**HS-70505 AND HS-70510 AND HS-70515****HS-70605 AND HS-70610 AND HS-70615**

These heavy-duty clamps provide the strong and durable function to meet the requirement of high precision repeatability for car manufacturing industry. Drop forged parts are accurately machined and equipped with hardened pivot pins and bushings. The clamps are fitted with hardened and ground bushes and pivot pins.




HS-70310
HS-70510
HS-70610



HS-70315
HS-70515
HS-70615



HS-70305
HS-70505
HS-70605

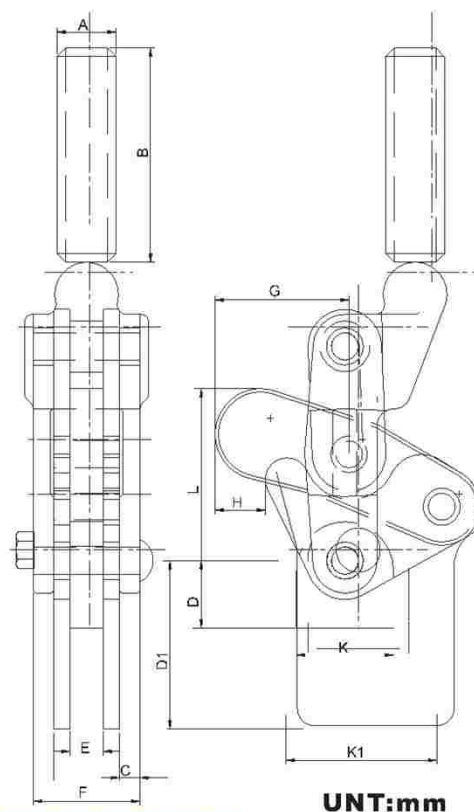


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	ARM OPENS	HANDLE OPENS	ØA	B	C	D	D1	E	F	G	H	K	K1	L
HS-70305	760	500	214°	134°	17.5	125	4.8	—	—	10	31.8	40	15	—	—	51
HS-70310	850							20	—					29	—	
HS-70315	940							50	50					—	45	
HS-70505	1330	1000	206°	130°	22.2	125	4.8	—	—	12.3	40.3	57	26	—	—	73
HS-70510	1490							28	—					38	—	
HS-70515	1590							63.5	63.5					—	51	
HS-70605	2550	2000	206°	130°	27	125	6.3	—	—	16	48.6	74.3	33	—	—	91
HS-70610	2830							33	—					51	—	
HS-70615	2950							76	76					—	63.5	

HS-70710 AND HS-71210 AND HS-72410**HS-70715 AND HS-71215 AND HS-72415**

HS-70710
HS-71210
HS-72410






HS-70715
HS-71215
HS-72415

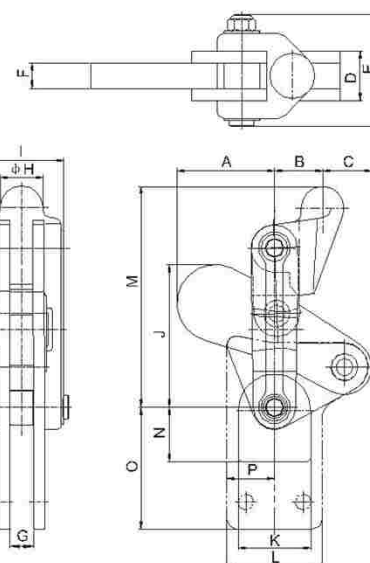


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	BAR OPENS	HANDLE OPENS	A	B	C	D	E	F	G	ØH	I	J	K	L	M	N	O	P
HS-70710	700	700	205°	134°	40	23	16	20	51	10	10	20	38	52	29	—	94	20	—	25
HS-71210	1300	1200	195°	130°	57	25	24	24	58	12	12	22	45	73	38	—	113	28	—	40
HS-72410	2900	2400	195°	130°	72	35	26	32	66	16	16	30	53	91	52	—	144	33	—	60
HS-70715	800	700	205°	130°	40	23	16	20	51	10	10	20	38	52	—	45	94	—	50	25
HS-71215	1450	1200	195°	130°	57	124	24	24	58	12	12	22	45	73	—	50	113	—	63	40
HS-72415	3200	2400	195°	130°	72	163	26	32	66	16	16	30	53	91	—	63	144	—	76	60

HS-75027 AND HS-75027-SM

- WEIGHT(自重): 1140g
- HOLDING CAPACITY(夾持力): 450Kg
- BAR OPENS(壓把開啓角度): 195°

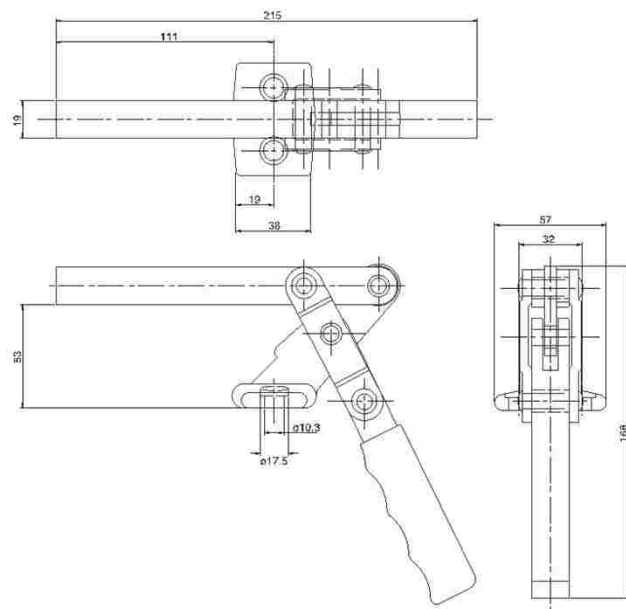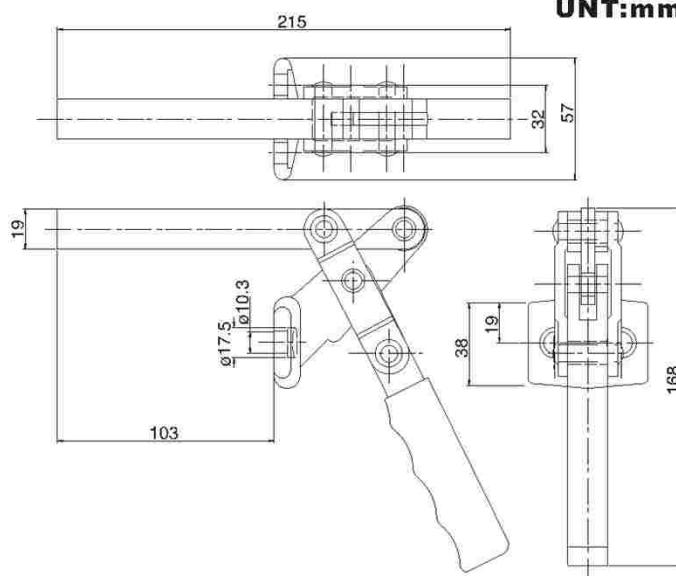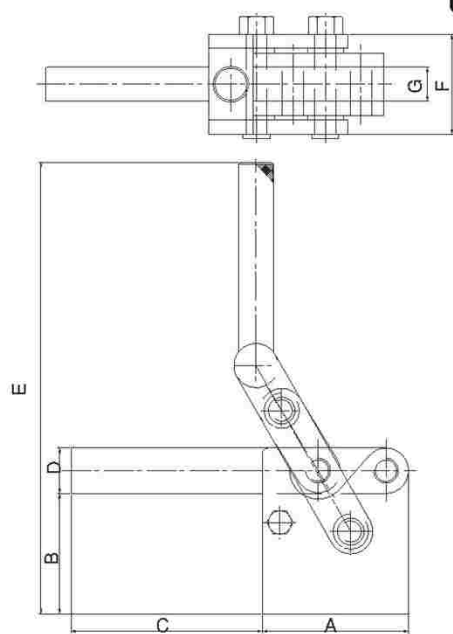**HS-75027****HS-75027-SM****UNT:mm****UNT:mm****HS-75048****HS-75078****HS-75088****HS-75048****HS-75078****HS-75088****UNT:mm**

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	ØA	B	C	D	E	F	G
HS-75048	2700	700	82.6	67.2	108	25.4	252	56	19
HS-75078	4200	1600	101.6	69.2	117.5	32	276	65.2	22.2
HS-75088	6500	2500	127	82.6	120	38	324	69.4	25.4

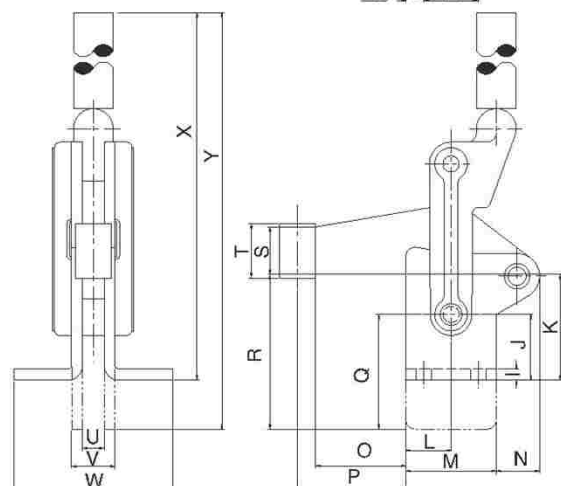HS-70320 AND HS-70300T, HS-70300B, HS-70720**HS-70725 AND HS-71220, HS-71225, HS-72420****HS-72425 AND HS-70533****HS-70320****HS-70300T****HS-70720
HS-71220
HS-72420****HS-70725
HS-71225
HS-72425**



MODEL	HS-70320	HS-70300T	HS-70300B	HS-70720	HS-70725	HS-71220	HS-71225	HS-72420	HS-72425
WEIGHT g	290	250	310	1100	1250	1800	1950	3750	4100
HOLDING CAPACITY kg	300			700		1200		2400	
BAR OPENS	210°			205°	180°	195°	180°	195°	
HANDLE OPENS	134°			130°	120°	130°	125°	130°	

UNT:mm

MODEL	A	B	C	D	E	F	G	ØH	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	ØZ
HS-70320	84	-	27	-	-	-	6.5	-	-	-	-	15	27	12	45	-	28	42	15	-	6	12	-	-	136	-
HS-70300T	29	14	10	12	27	6	6	16	20	32	-	27	107	-	28	15	-	-	-	-	-	-	-	-	-	-
HS-70300B	84	-	27	6	19	32	6.5	-	5	13	23	15	31	8	45	-	-	-	15	-	-	-	42	120	-	6.5
HS-70720	-	104	51	-	-	-	12.2	10	-	-	-	25	45	20	40	25	50	70	22	30	10	20	-	215	235	-
HS-70725	124	25	51	10	25	50	12.2	10	5	28	48	25	45	20	40	25	-	-	22	30	-	-	67	215	235	8.3
HS-71220	-	-	58	-	-	-	12.2	12	-	-	-	25	50	24	50	50	63	85	26	30	12	24	-	276	303	-
HS-71225	144	35	58	10	30	60	12.2	12	6	36	58	25	50	24	50	50	-	-	26	30	-	-	88	276	303	8.3
HS-72420	-	-	66	-	-	-	16.3	16	-	-	-	40	63	35	60	75	76	105	32	38	16	32	-	295	318	-
HS-72425	188	-	66	12	40	75	16.3	16	8	46	70	40	63	35	60	75	-	-	32	38	-	-	105	295	318	10.3

**HS-70533**

WEIGHT(自重):1290g
 HOLDING CAPACITY(夾持力):700kg
 BAR OPENS(壓把開啓角度):130°
 HANDLE OPENS(手柄開啓角度):85°
 SPINDLE SUPPLIED(壓頭螺絲型號):HS-SA-12300

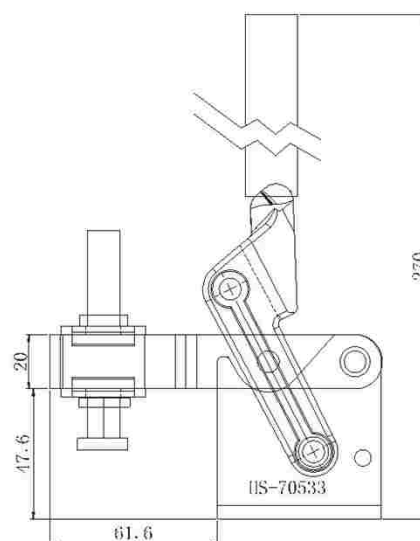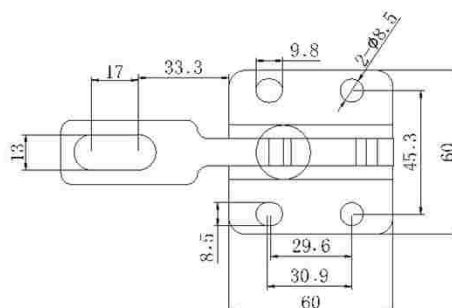

UNT:mm

HS-70200A, HS-70730A, HS-71230A, HS-72430A
HS-70200B, HS-70730B, HS-71230B, HS-72430B

HS-70200A

HS-70730A

HS-71230A

HS-72430A




HS-70200B

HS-70730B

HS-71230B

HS-72430B

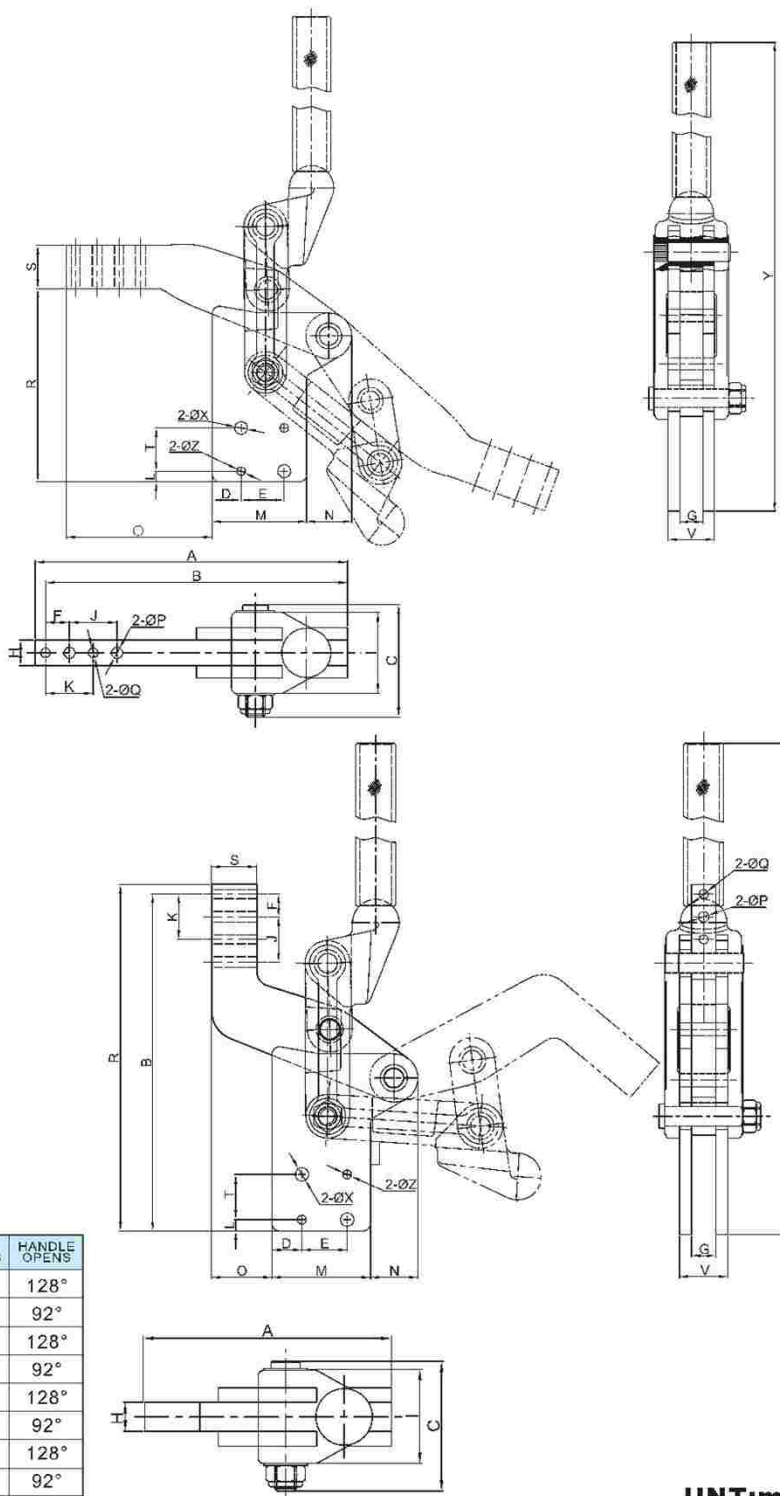

MODEL	WEIGHT (kg)	HOLDING CAPACITY (kg)	BAR OPENS	HANDLE OPENS
HS-70200A	300	250	200°	128°
HS-70200B	300		130°	92°
HS-70730A	1280	700	200°	128°
HS-70730B	1280		130°	92°
HS-71230A	2120	1200	200°	128°
HS-71230B	2120		130°	92°
HS-72430A	3780	2400	200°	128°
HS-72430B	3780		130°	92°

UNT:mm

MODEL	A	B	C	D	E	F	G	ΦH	I	J	K	L	M	N	O	ΦP	ΦQ	R	S	T	V	ΦX	Y	ΦZ
HS-70200A	90.2	84	27	5.9	15	7.5	6	15	19	15	15	5	26.8	8.1	55.3	5.5	4	45	15	15	12	5.5	154	4
HS-70200B	53	95.1	27	5.9	15	7.5	6	15	19	15	15	5	26.8	8.1	18.1	5.5	4	101.3	15	15	12	5.5	154	4
HS-70730A	141	133	48	10.5	24	15	10	15	35	30	30	10	45	20	75.7	7	6	80	20	19	20	9	239	6
HS-70730B	81	158	48	10.5	24	15	10	15	35	30	30	10	45	20	15.7	7	6	166	20	19	20	9	239	6
HS-71230A	172.5	164.5	55	11.3	30	15	12	15	41.8	30	30	8	52.8	23	96.7	7	6	104	30	30	24	9	277.5	6
HS-71230B	109.5	196	55	11.3	30	15	12	15	41.8	30	30	8	52.8	23	33.7	7	6	203.5	30	30	24	9	277.5	6
HS-72430A	198.5	192	67.5	20	30	15	16	16	52	30	30	7.5	65.5	31.5	101.5	7	6	134.5	30	30	32	9	343	6
HS-72430B	137	223.5	67.5	20	30	15	16	16	52	30	30	7.5	65.5	31.5	40	7	6	230	30	30	32	9	343	6

HS-702-C AND HS-70201, HS-702-D, HS-70203**HS-702-K AND HS-701-C, HS-70101, HS-701-D****HS-70103 AND HS-701-K**

- FIXED HANDLE HOLDER
- (ONE PIECE FORGED)



HS-702-C
HS-702-D
HS-702-K





HS-70201
HS-70203



HS-701-C
HS-701-D
HS-701-K



HS-70101
HS-70103

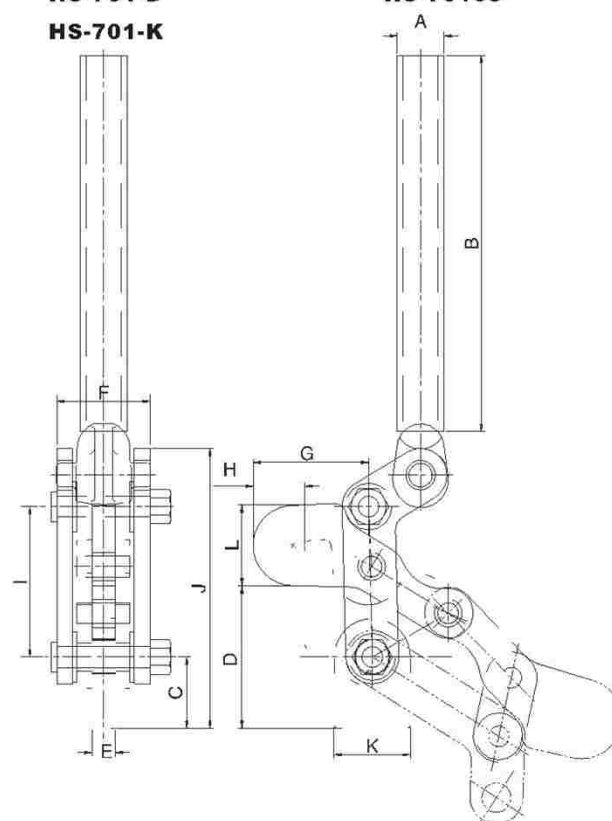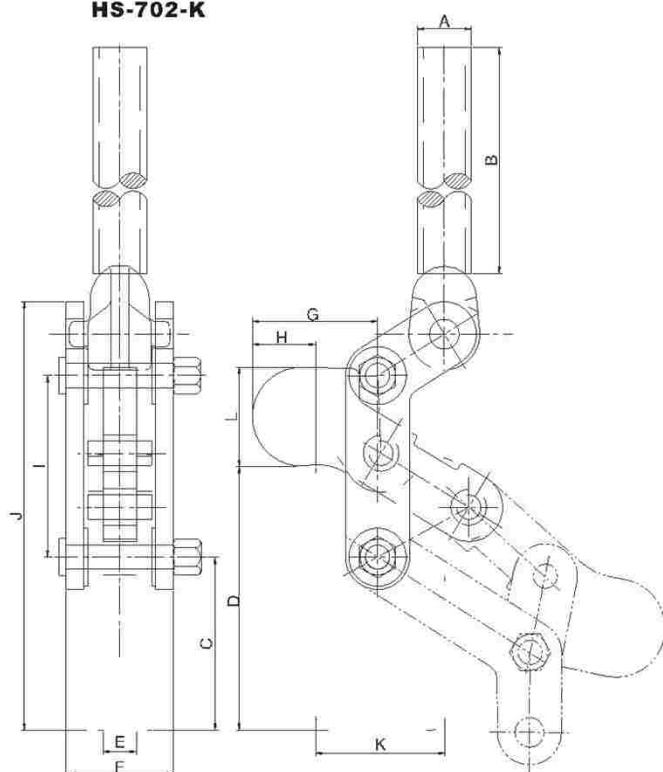


MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	BAR OPENS	HANDLE OPENS	ØA	B	C	D	E	F	G	H	I	J	K	ØL
HS-702-C	680	200	194"	123"	17.3	152.4	23.8	48	8	31.8	40	17	50.8	93	26	28
HS-70201																
HS-702-D	1470	500	191"	122"	21.7		33.7	69	13	42	48.8	24.6	70	132	36.4	39
HS-70203																
HS-702-K	2610	1000	197"	128"	27.2		37.2	84	16	46	53	25	90	167	54	52
HS-701-C	600	200	194"	123"	17.3		50	75.5	8	31.8	40	17	50.8	121	44.5	28
HS-70101																
HS-701-D	1590	500	191"	122"	21.7		66.8	102	13	42	48.8	24.6	70	165	50	39
HS-70103																
HS-701-K	2650	1000	197"	128"	27.2		80	123	16	46	53	25	90	205	63	52


UNT:mm

HS-80070


- WEIGHT(自重): 977g
- HOLDING CAPACITY(夹持力): 200kg
- SCREW STROKE(行程): 85mm

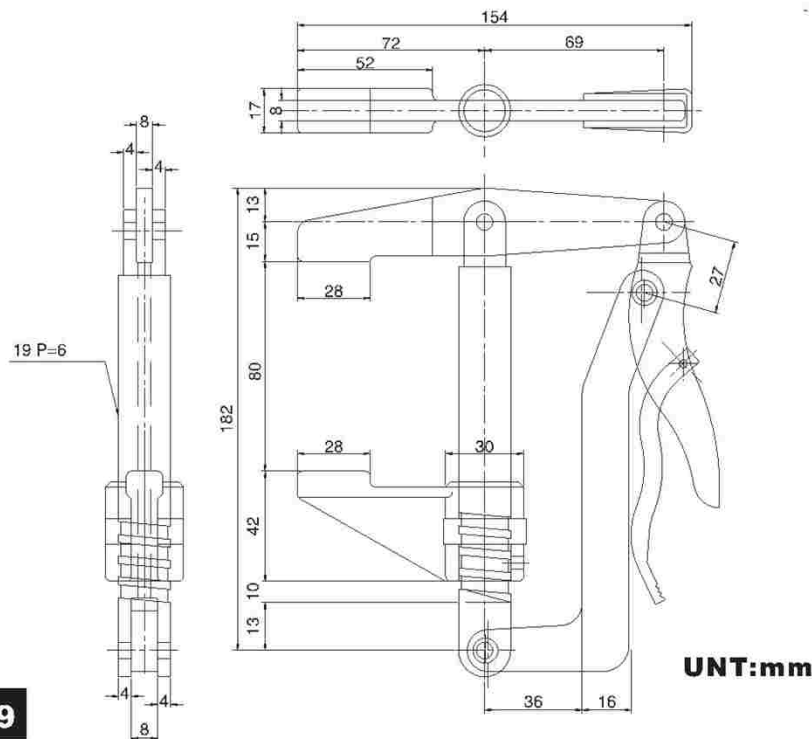**HS-80070****HS-80325 AND HS-80379**

- WEIGHT(自重): 500g
- HOLDING CAPACITY(夹持力): 340Kg
- SPINDLE SUPPLIED(压头螺丝型号): HS-SA-12212
- HANDLE OPENS(手柄开启角度): 50°
- JAW OPENS(开口打开): 90°
- HS-80325-SS (不锈钢)
- HS-80379-SS (不锈钢)

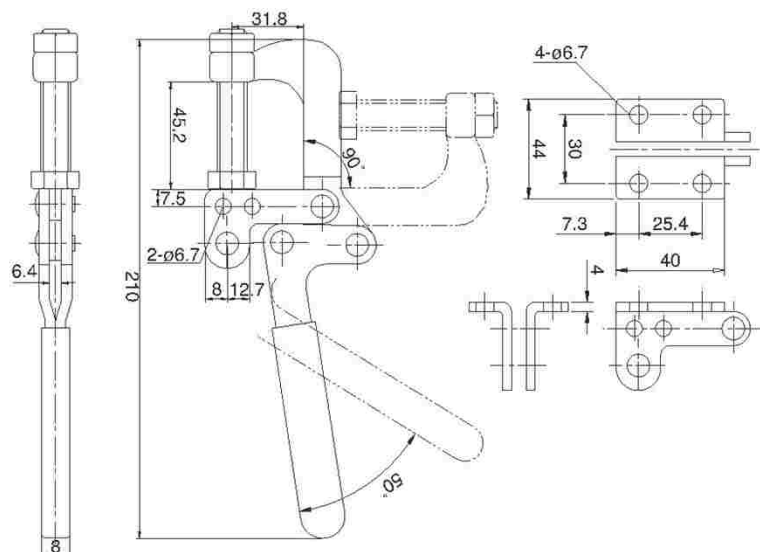**HS-80325****HS-80379****UNT:mm**


- MATERIAL: AISI 1045 MEDIUM CARBON STEEL.
- HARDESS: HRC38° ± 2
- SURFACE: PHOSPHATE TREATMENT

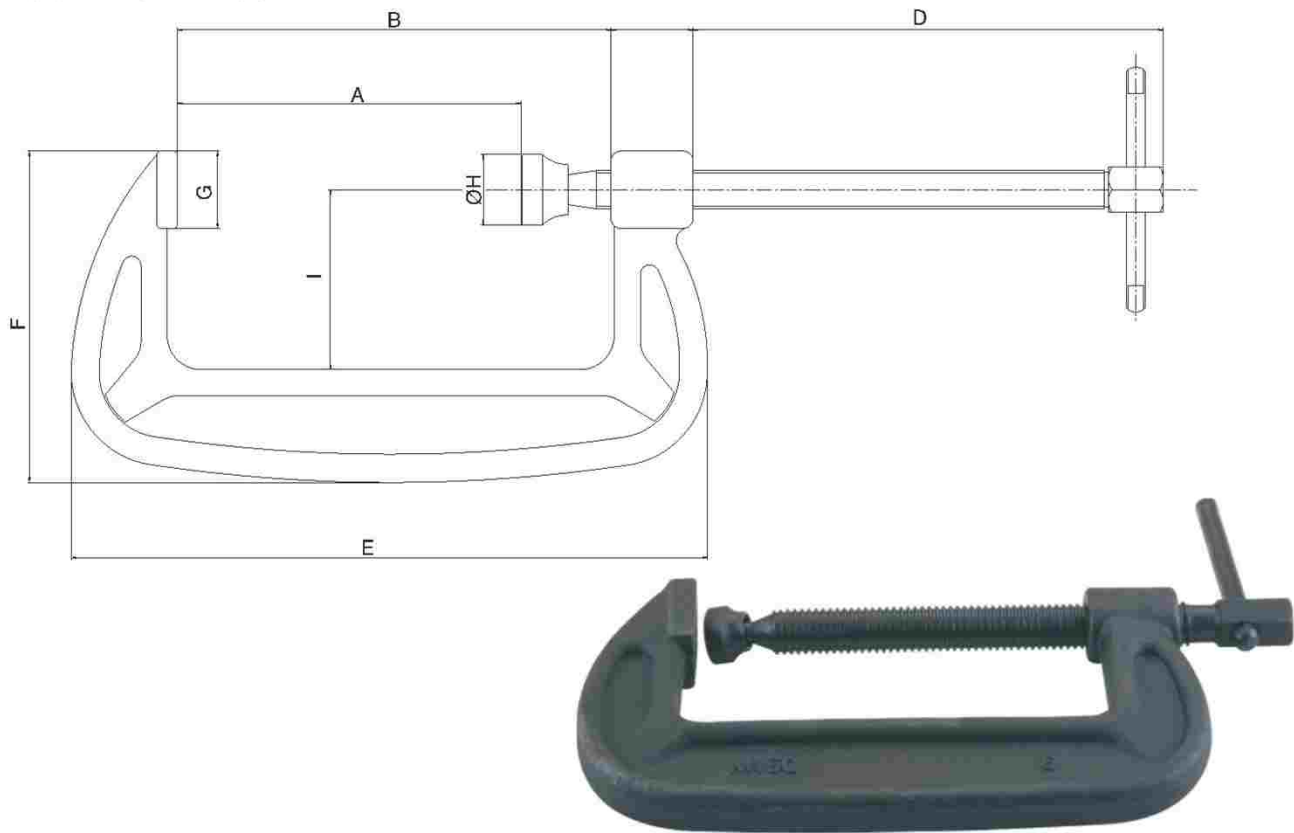

MODEL	SIZE	A	B	C	D	E	F	G	H	I	WEIGHT	HOLDING CAPACITY
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
M25	1"	25.5	36	20	49	80	58	20	Ø16	24.5	0.2	1300
M38	1-1/2"	39	50	20	69	97	68	20	Ø16	31	0.29	1500
M50	2"	54	66	21.6	87.8	120	70.5	22.2	Ø15.8	31.3	0.45	2000
M75	3"	69.7	85.3	27	107.4	148.4	83.7	27.4	Ø19	40	1.25	2800
M100	4"	98.2	117.5	32.4	143	192.2	106	31.5	Ø22.2	51.5	1.40	3000
M125	5"	118.7	140	36.7	176.4	225	122.5	35.5	Ø25.5	60.8	2.17	3300
M150	6"	155	175	40	198.8	270	137.8	41.5	Ø25.5	72.3	3.17	3600
M200	8"	185.2	209.5	44	239.8	323	174.4	41.7	Ø28	96	4.55	6000
M250	10"	243.5	270	44.5	330	380	203	43	Ø28	124	6.1	7000
M300	12"	290	320	55	360	455	223	50	Ø35	130	9.0	8000

UNT:mm

深喉式C型钳

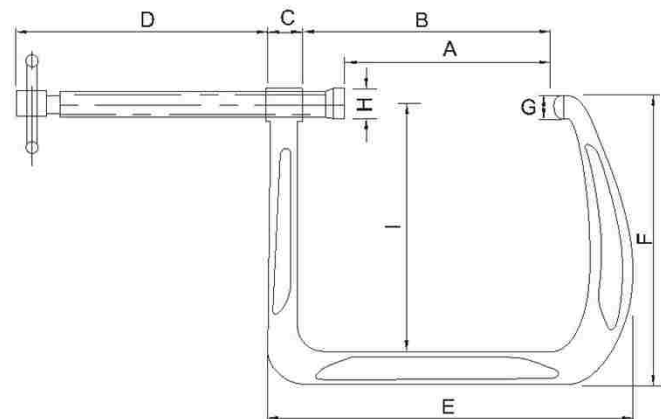

MODEL	SIZE	A	B	C	D	E	F	G	H	I	WEIGHT
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
M50	2"	53	64.5	20.5	83	115	95	22.5	φ16	59	0.32
M75	3"	70	91.5	23.5	103	155	125	25	φ22.2	80.5	1.3
M100	4"	105	131.5	31	145	216	178	28	φ25.5	117	2.05
M150	6"	150	172	31	196	270	220	33	φ30	160	3.17

HS-10101-A

- HOLDING CAPACITY(夾持力): 50Kg
- BAR OPENS(壓把開啓角度): 82°
- SPINFLE SUPPLIED(壓頭螺絲型號): HS-FC-10138

**HS-12050-A AND HS-12050-UA**

- HOLDING CAPACITY(夾持力): 91Kg
- BAR OPENS(壓把開啓角度): 92°
- SPINFLE SUPPLIED(壓頭螺絲型號): HS-FC-14134

**HS-12130-A AND HS-12132-A**

- HOLDING CAPACITY(夾持力): 227Kg
- BAR OPENS(壓把開啓角度): 92°
- SPINFLE SUPPLIED(壓頭螺絲型號): HS-FC-56212

**HS-12265-A AND HS-12275-A**

- HOLDING CAPACITY(夾持力): 340Kg
- BAR OPENS(壓把開啓角度): 86°
- SPINFLE SUPPLIED(壓頭螺絲型號): HS-FC-38312



HS-10247-A AND HS-10249-A

- HOLDING CAPACITY(夾持力) : 450kg
- BAR OPENS(壓把開啓角度) : 95°
- SPINDLE SUPPLIED(壓頭螺絲型號) : HS-FC-12300



HS-20820-A



- HOLDING CAPACITY(夾持力) : 100kg
- BAR OPENS(壓把開啓角度) : 80°
- SPINDLE SUPPLIED(壓頭螺絲型號) : HS-FC-56212



HS-20830-A

- HOLDING CAPACITY(夾持力) : 340kg
- BAR OPENS(壓把開啓角度) : 79°
- SPINDLE SUPPLIED(壓頭螺絲型號) : HS-FC-38312

E SPINDLE SIZE

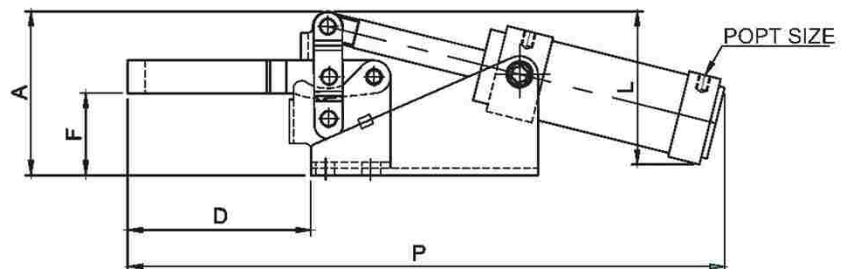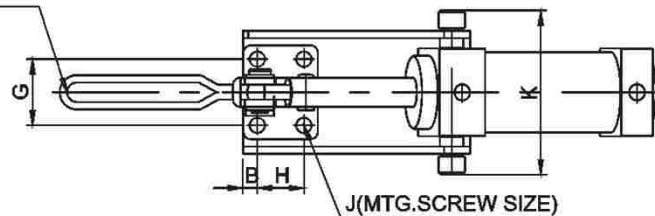


MODEL	BAR MOVES	PORT SIZE	WEIGHT (g)	P	A	B	D	E	F	G	H	J	K	L
HS-10101-A	82°	G1/8"	280	170	47.7	4.8	25.7	HS-FC-10138	21	23.8	15.9	4.5	52	55
HS-12050-(U)A	92°	G1/8"	620	185	57	6.3	35	HS-FC-14134	25.7	27	12.7	5.2	69	51
HS-12130-A	92°	G1/8"	900	246	75.4	11	68	HS-FC-56212	34.8	31.8	19	7.1	74	73
HS-12132-A	92°	G1/8"	900	270	75.4	11	92.6	HS-FC-56212	34.8	31.8	19	7.1	74	73
HS-12265-A	86°	G1/8"	1640	302	97	8.7	92	HS-FC-38312	47.2	45.2	31.8	8.7	98	92
HS-12275-A	86°	G1/8"	1800	308	97	8.7	91	HS-FC-38312	47.2	45.2	31.8	8.7	98	92
HS-10247-A	95°	G1/8"	3620	407	112	9.5	125.4	HS-SA-12300	56.1	45.2	31.8	8.7	112	104
HS-10249-A	95°	G1/8"	3640	407	112	9.5	125.4	HS-SA-12300	56.1	45.2	31.8	8.7	112	104
HS-20820-A	80°	G1/8"	1000	165	109.5	15	62	HS-FC-56212	70	25	16	6.7	67	195
HS-20830-A	79°	G1/8"	2060	216.6	149.5	9.25	82.9	HS-FC-38312	98.3	44.4	31.8	8.3	96	237

UNT:mm

HS-36301-A

- HOLDING CAPACITY(夾持力): 45Kg
- PLUNGER STROKE(行程): 7.5mm
- SPINFLE SUPPLIED(壓頭螺絲型號): HS-SA-042007

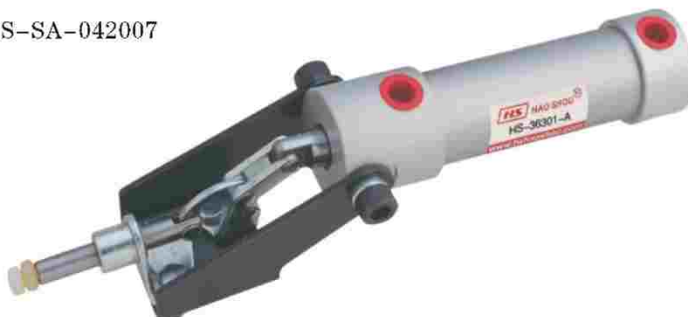

UNT:mm

HS-36003-A


- HOLDING CAPACITY(夾持力): 272Kg
- PLUNGER STROKE(行程): 19.7mm
- SPINFLE SUPPLIED(壓頭螺絲型號): HS-SA-085012



UNT:mm

HS-36330-A

- HOLDING CAPACITY(夾持力): 1136Kg
- PLUNGER STROKE(行程): 28mm
- SPINFLE SUPPLIED(壓頭螺絲型號): HS-SA-105015

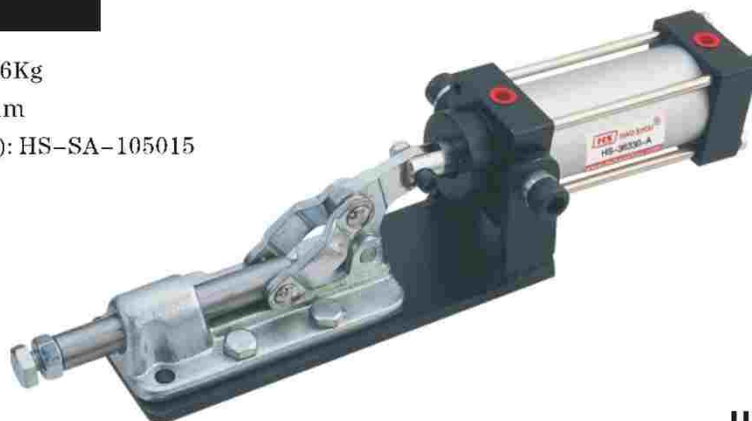


UNT:mm

HS-305-EA

- HOLDING CAPACITY(夾持力): 386Kg
- PLUNGER STROKE(行程): 23.6mm
- SPINFLE SUPPLIED(壓頭螺絲型號): HS-SA-105015



UNT:mm

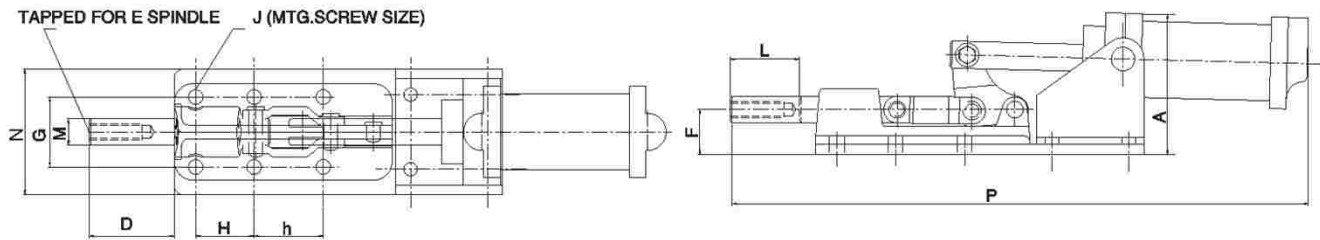**DIMENSIONS:**

MODEL	PORT SIZE	P	A	B	D	E	F	G	H	h	J	L	M	N
HS-36301-A	G1/8"	187	40	8.3	35.2	HS-SA-042007	13.6	15.9	15.9	-	4.4	12	6.4	34
HS-36003-A	G1/8"	259.3	69.5	7.1	54.5	HS-SA-085012	27.7	33.3	36.5	-	4.8	19.7	11.1	56
HS-36330-A	G1/8"	347	84	12.7	51.5	HS-SA-108515	26.6	41.3	34.9	41.3	8	30	15.9	68
HS-305-EA	G1/8"	306	77.2	9.5	75	HS-SA-126517	34.8	41.3	41.3	-	8.7	23.6	15.9	57.2

UNT:mm

HS-702-CA AND HS-702-DA AND HS-702-KA

HS-702-CA



- ▶ HOLDING CAPACITY(夾持力): 200Kg
- ▶ BAR OPENS(壓把開啓角度): 65°

HS-702-DA

- ▶ HOLDING CAPACITY(夾持力): 500Kg
- ▶ BAR OPENS(壓把開啓角度): 72°

HS-702-KA

- ▶ HOLDING CAPACITY(夾持力): 1000Kg
- ▶ BAR OPENS(壓把開啓角度): 80°

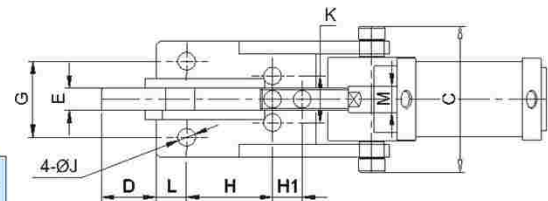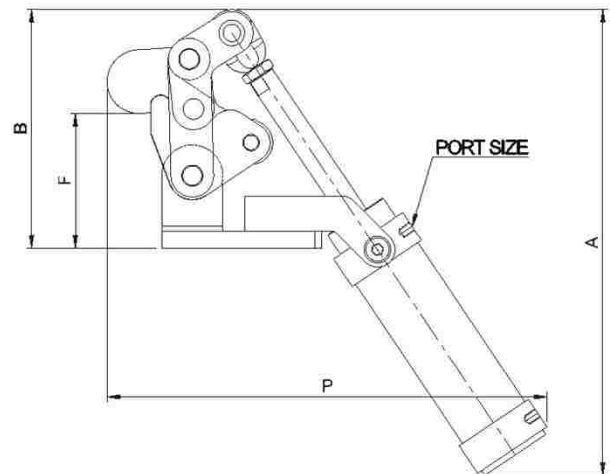


MODEL	PORT SIZE	WELGHT(g)	BAR OPENS	P	A	B	C	D	E	F	ØJ	M	G	H	H1	K	L
HS-702-CA	G1/8"	1140	65°	236	158	103	80	27	8	56.4	8.5	12	41	30	20	-	15
HS-702-DA	G1/8"	3015	72°	263	277	142	93	34	13	81	11	16	58	60	-	36	20
HS-702-KA	G3/8"	6250	80°	416	360	175	126	33	16	90.4	12.4	20	60	65	45	50	20

POWER CLAMP SPECIFICATIONS

MODEL NO.	CYLINDER BORE (mm)	CYLINDER AREA (cm ²)	MAXIMUM CYLINDER AIR PRESSURE (kg/cm ²)(PSI)	MAXIMUM HOLDING CAPACITY (kgs)
HS-10101-A	20	3.14	10 140	50
HS-12050-A	32	7.07	10 140	91
HS-12130-A	32	7.07	10 140	227
HS-12132-A	32	7.07	10 140	227
HS-12265-A	40	12.56	10 140	340
HS-12275-A	40	12.56	10 140	340
HS-10247-A	50	19.625	10 140	450
HS-20820-A	32	7.07	10 140	100


MODEL NO.	CYLINDER BORE (mm)	CYLINDER AREA (cm ²)	MAXIMUM CYLINDER AIR PRESSURE (kg/cm ²)(PSI)	MAXIMUM HOLDING CAPACITY (kgs)
HS-10249-A	50	19.625	10 140	450
HS-36301-A	20	3.14	10 140	45
HS-36003-A	32	7.07	10 140	272
HS-36330-A	40	12.56	10 140	1136
HS-305-EA	32	12.56	10 140	386
HS-702-CA	32	7.07	10 140	200
HS-702-DA	40	12.56	10 140	500
HS-702-KA	63	31	10 140	1000

UNT:mm

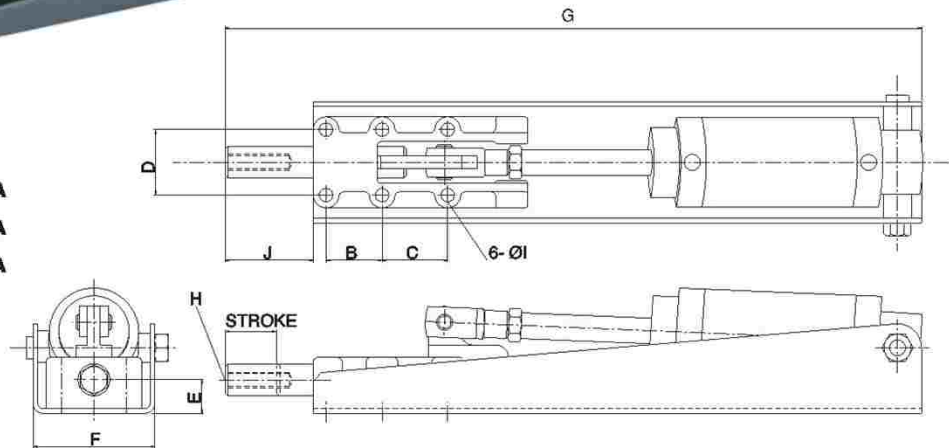HS-30600HL-A AND HS-31200HL-A
HS-32500HL-A
**HS-30600HL-A****HS-31200HL-A****HS-32500HL-A**

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	PLUNGER STROKE	A	B	C	D	E	F	G	H	ØI	J
HS-30600HL-A	1450	600	HS-SA-086512	25	25	36.5	-	33.4	14	59	325	M8 P=1.25	5.5	41
HS-31200HL-A	3700	1200	HS-SA-107515	32	8	35	41	41	21	76	435	M10 P=1.5	8.5	55
HS-32500HL-A	7400	2500	HS-SA-127517	50	12	45	45	54	26	96	577	M12 P=1.75	10.3	102

UNT:mm

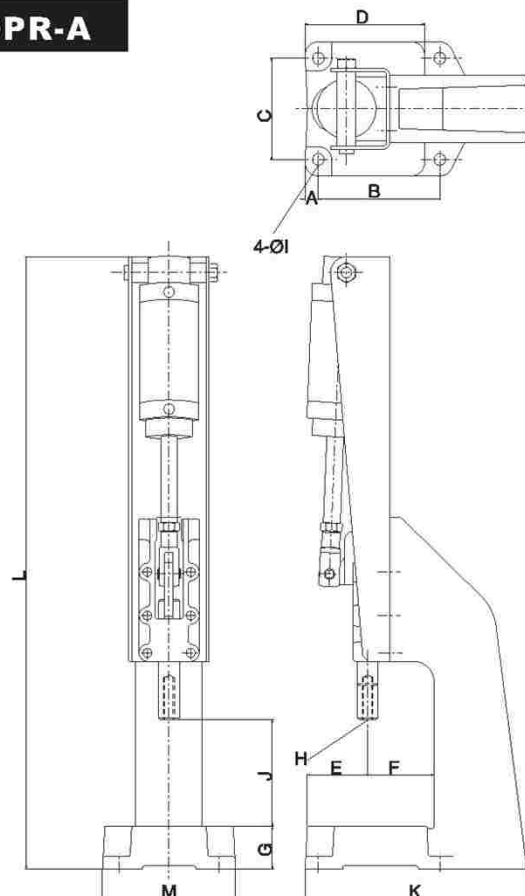HS-30600PR-A AND HS-31200PR-A
HS-32500PR-A
**HS-30600PR-A****HS-31200PR-A****HS-32500PR-A**

UNT:mm

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	HANDLE OPENS	PLUNGER STROKE	A	B	C	D	E	F	G	H	I	J	K	L	M
HS-30600PR-A	3600	600	HS-SA-086512	185°	25	10	95	80	94	49	52	32	M8 P=1.25	9	75	150	430	100
HS-31200PR-A	7350	1200	HS-SA-107515	185°	35	125	115	95	113	59	63	40	M10 P=1.5	11	100	192	575	120
HS-32500PR-A	17920	2500	HS-SA-127517	185°	50	125	145	125	139	63	79	54	M12 P=1.75	11	120	238	750	150

HTK系列

特点

气缸缸体使用铝合金材料，经气化处理，更具耐磨及耐腐蚀性。

采用无给油轴承及耐磨密封环使用寿命长。

多个配管位置可供选择。

附缓冲型可有效减缓对缸盖之冲击。

附磁性环型可搭配选用磁簧开关。



规格


型号	HTK		
作动方式	复动型		
气缸内径	40	50	63
使用流体	空气		
使用压力范围	0.5~9.9kgf/cm ²		
耐压力	15kgf/cm ²		
周围温度	-5℃~+60℃(不冻结)		
给油	不需给油		
使用速度范围	50~500mm/sec		
缓冲装置	端点可调缓冲		
感应开关	RCA		
感应开关束带	PN-A40	PN-A50	PN-A63

订货代号

HTK - 40 - 100(M) A

型号 气缸内径 行程 无: 可调缓冲型
 40,50,63 50 75 A: 进气可调型
 100 M: 附磁石
 125
 150


使用范例

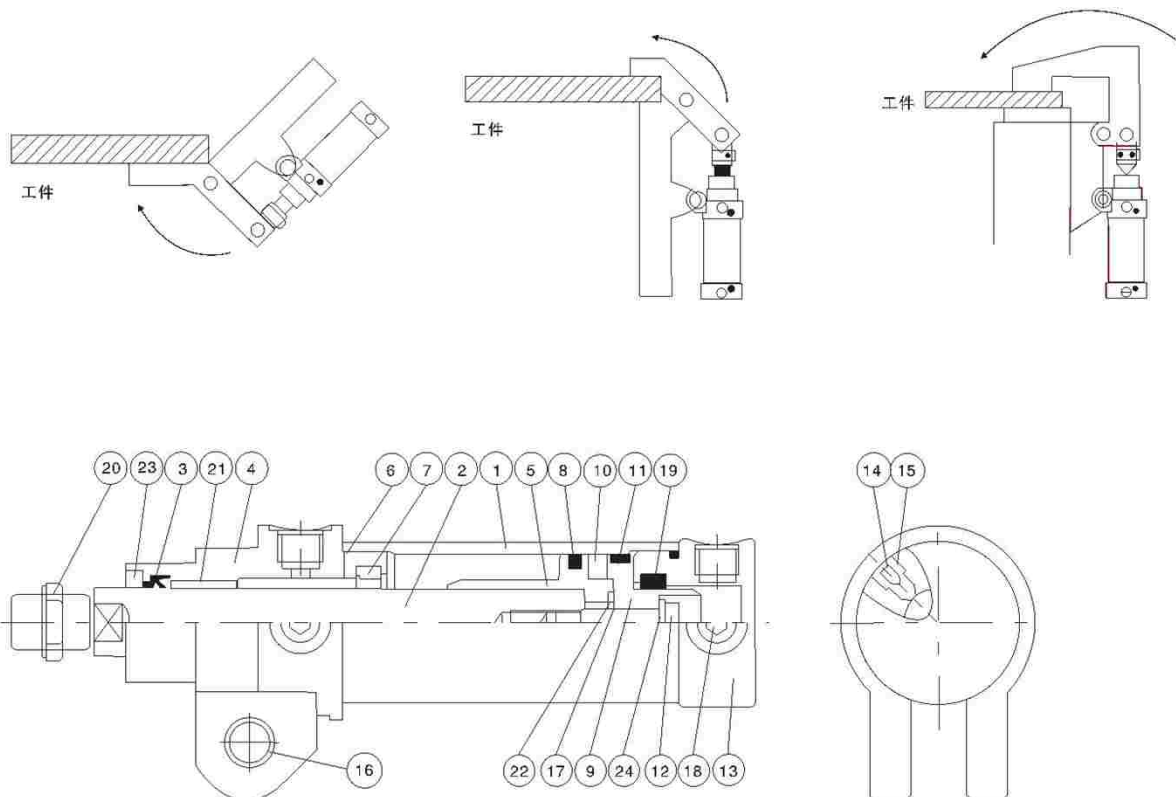


HTK系列

主要零件材质

序号	零件名称	材质	序号	零件名称	材质
1	缸管	铝合金	13	后盖	铝合金
2	活塞杆	中碳钢	14	针阀	铜合金
3	活塞杆环	NBR	15	针阀密封环	NBR
4	前盖	铝合金	16	套	碳钢
5	前活塞	铝合金	17	活塞垫片	NBR
6	缸盖杆环	NBR	18	塞头	碳钢
7	前缓冲密封环	NBR	19	后缓冲密封环	NBR
8	活塞密封环	NBR	20	杆前螺帽	碳钢
9	后活塞	铝合金	21	活塞杆套	铜合金
10	磁性环	磁石材	22	平垫片	碳钢
11	耐磨环	铁氟龙	23	焊溅物刮环	铜合金
12	活塞螺栓	合金钢	24	盘形垫圈	碳钢

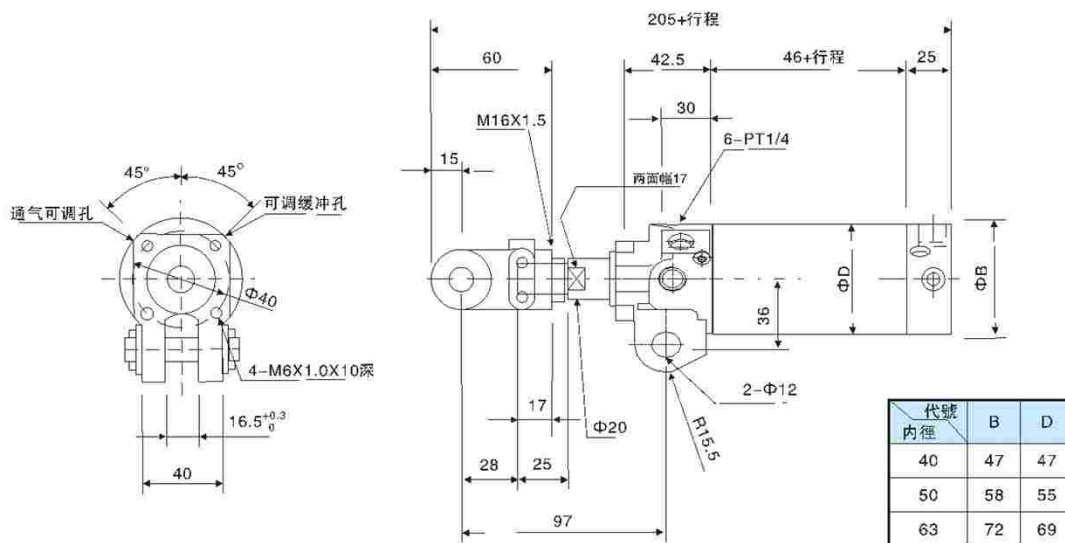

接头配件

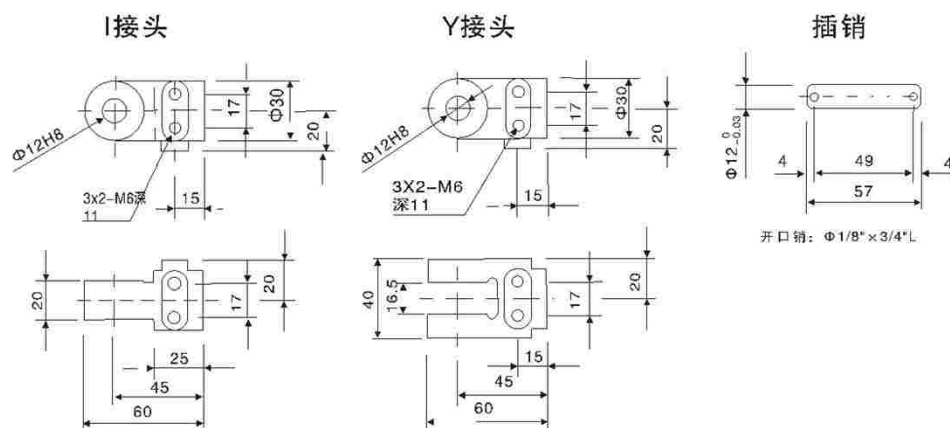

The clamp trolley is mostly used in the shop floor area due to its high stability and steel construction. It takes up only 60x90cm floor space.

The clamp trolley is used as a sales display, and also as a tooling stand in a workshop.

Trolley Series




Specifications

Item NO.	WidthxDepthxHeight (mm)	Caster (mm)	Weight (kg)	Pack (pcs)
DP1	800x575x1560	75x32	39	1
DP2	600x575x1400	75x32	35	1




F夹 F clip



型号	导轨(mm)	L × H(mm)	夹持力(kg)	装盒数(pcs)	装箱数(pcs)	单支重(kg)	毛重(kg)
H30224	22*10.6	200*120	550	4	16	1.23	21.0
H30225	22*10.6	250*120	550	4	16	1.31	23.5
H30226	22*10.6	300*120	550	4	16	1.40	24.0
H30227	22*10.6	400*120	550	4	16	1.56	26.5
H30228	22*10.6	500*120	550	4	8	1.75	15.5
H30229	22*10.6	600*120	550	4	8	1.91	17.0
H30230	22*10.6	800*120	550	2	8	2.25	23.0
H30231	22*10.6	1000*120	550	2	8	2.59	23.0


重型F夹 Heavy F clip



- 优质合金钢材质，镀铬，快速调整
High quality alloy steel material, chrome plating, quick adjustment
- 适用于金属行业，各种物体的夹持
Suitable for metal industry, clamping of various objects
- 经过特殊工艺热处理，使用时滑道无压痕
After special heat treatment, there is no indentation in the slideway during use

型号	导轨(mm)	L × H(mm)	夹持力(kg)	装盒数(pcs)	装箱数(pcs)	单支重(kg)	毛重(kg)
H30212	29.7*14.3	200*120	1200	2	10	2.55	25.5
H30213	29.7*14.3	250*120	1200	2	10	2.60	26.0
H30214	29.7*14.3	300*120	1200	2	8	2.75	22.0
H30215	29.7*14.3	400*120	1200	2	8	3.06	24.48
H30216	29.7*14.3	500*120	1200	2	8	3.50	28.0
H30217	29.7*14.3	600*120	1200	2	8	3.75	30.0
H30218	29.7*14.3	800*120	1200	2	4	4.12	16.48
H30219	29.7*14.3	1000*120	1200	2	4	5.12	20.48
H30220	29.7*14.3	1200*120	1200	2	4	6.12	24.48


胶柄F夹 Plastic handle F clip



- ▶ 钳口带塑料压角
Jaws with plastic angle
- ▶ PVC手柄，握感舒适
PVC handle, comfortable grip
- ▶ 镀铬，快速调整
Chrome plating, quick adjustment

型号	导轨(mm)	L × H(mm)	夹持力(kg)	装盒数(pcs)	装箱数(pcs)	单支重(kg)	毛重(kg)
H30121	15.5*7.5	160*80	250	4	24	0.6	15.5
H30122	15.5*7.5	200*80	250	4	24	0.65	16.6
H30123	15.5*7.5	250*80	250	4	24	0.7	18.0
H30124	15.5*7.5	300*80	250	4	24	0.75	19.5
H30125	15.5*7.5	450*80	250	4	24	0.8	22.5
H30126	15.5*7.5	600*80	250	4	16	1.0	17.5
H30127	15.5*7.5	800*80	250	2	16	1.2	21.0
H30128	15.5*7.5	900*80	250	2	16	1.23	21.7
H30129	15.5*7.5	1000*80	250	2	16	1.27	22.5
H30130	15.5*7.5	1200*80	250	2	16	1.7	29.5

可卸压脚F夹 Removable presser foot F clip



型号	导轨(mm)	L × H(mm)	夹持力(kg)	装盒数(pcs)	装箱数(pcs)	单支重(kg)	毛重(kg)
H30360	42.1*19.1	300*180	2200	2	4	5.75	24.0
H30361	42.1*19.1	400*180	2200	2	4	6.50	27.0
H30362	42.1*19.1	500*180	2200	2	4	7.00	29.5
H30363	42.1*19.1	600*180	2200	/	2	7.75	16.5


工业级三件套F夹 Industrial grade three-piece F clip



- ▶ 3件套壓腳，六角頭絲杆，擺動壓腳，適用範圍更廣
3-piece presser foot, hex head screw, swing presser foot, wider application range


型号	导轨(mm)	L × H(mm)	夹持力(kg)	装盒数(pcs)	装箱数(pcs)	单支重(kg)	毛重(kg)
H30334	29.7*14.3	300*140	1250	2	8	2.64	22.5
H30335	29.7*14.3	400*140	1250	2	6	3.15	20.0
H30336	29.7*14.3	500*140	1250	2	6	3.46	22.0
H30337	29.7*14.3	600*140	1250	2	6	3.77	24.0
H30338	29.7*14.3	800*140	1250	2	4	4.34	19.0
H30339	29.7*14.3	1000*140	1250	2	4	4.86	21.0
H30340	29.7*14.3	1200*140	1250	2	4	5.57	24.0

棘轮F夹 Ratchet F clip

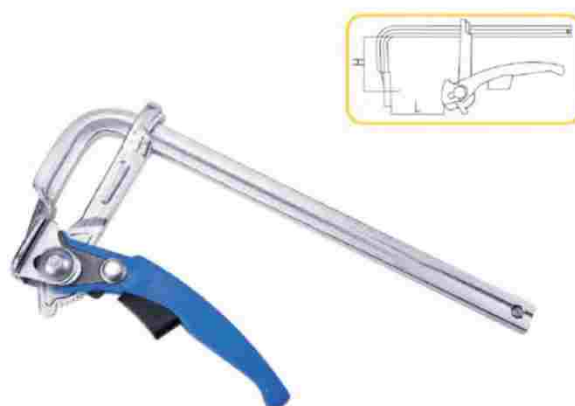

型号	导轨(mm)	L × H(mm)	夹持力(kg)	装盒数(pcs)	装箱数(pcs)	单支重(kg)	毛重(kg)
H30470	19.5*9.5	200*100	350	2	12	1.60	20.2
H30471	19.5*9.5	300*100	350	2	12	1.80	22.6
H30472	19.5*9.5	400*100	350	2	12	1.96	24.5

重型棘輪F夾 Heavy ratchet F clip



表面鍍鉻，快速調整


Chrome-plated surface, quick adjustment

優質合金鋼材質，整體熱處理，操作簡單，使用範圍廣

High-quality alloy steel material, overall heat treatment, simple operation, wide range of use

型号	导轨(mm)	L × H(mm)	夹持力(kg)	装盒数(pcs)	装箱数(pcs)	单支重(kg)	毛重(kg)
H30454	25*12	300*120	500	2	10	2.20	23.0
H30455	25*12	400*120	500	2	8	2.42	20.5
H30456	25*12	500*120	500	2	8	2.64	22.5
H30457	25*12	600*120	500	2	8	2.86	24.0
H30458	25*12	800*120	500	2	4	3.29	14.5

轻型F夹 Lightweight F clip



絲杠採用黑色電泳，旋轉順滑，夾持更緊

The screw adopts black electrophoresis, the rotation is smooth, and the clamping is tighter

自鎖設計，穩固有力，雙面卡齒不易脫落

Self-locking design, stable natural force, double-sided teeth are not easy to fall off

塑料墊片夾持無痕，防止損傷物體表面

The plastic gasket is clamped without traces to prevent damage to the surface of the object

圓潤PP手柄，不易打滑

Round PP handle, not easy to slip

型号	导轨(mm)	L × H(mm)	夹持力(kg)	装盒数(pcs)	装箱数(pcs)	单支重(kg)	毛重(kg)
H30800	14.5*4.5	150*50	100	4	24	0.29	7.96
H30801	14.5*4.5	200*50	100	4	24	0.32	8.68
H30802	23.5*4.5	300*80	100	4	24	0.81	20.44
H30803	28.5*6.4	400*120	100	2	20	1.40	29.0
H30804	28.5*6.4	600*120	100	2	10	1.70	18.0

ADJUSTABLE SPINDLE ASSEMBLIES



FLAT CUSHION-TIP BONDED NEOPRENE CAP

Prat N0.	Description	Prat N0.	Description
HS-FC-042507	M4×25P=0.7	HS-FC-10138	3/16-24×1-3/8
HS-FC-044207	M4×42P=0.7	HS-FC-14134	1/4-20×1-3/4
HS-FC-064410	M6×44P=1.0	HS-FC-14218	1/4-20×2-1/8
HS-FC-065110	M6×51P=1.0	HS-FC-56212	5/16-18×2-1/2
HS-FC-086312	M8×63P=1.25	HS-FC-56300	5/16-18×3
HS-FC-087512	M8×75P=1.25	HS-FC-38312	3/8-16×3-1/2
HS-FC-108515	M10×85P=1.5	HS-FC-38412	3/8-16×4-1/2
HS-FC-121017	M12×100P=1.75	HS-FC-12334	1/2-13×3-3/4

ADJUSTABLE SPINDLE ASSEMBLIES



STANDARD ADJUSTABLE

Prat N0.	Description	Prat N0.	Description
HS-SA-041507	M4×15P=0.7	HS-SA-08034	8-32×3/4(nylon)
HS-SA-042007	M4×20P=0.7	HS-SA-10118	10-24×1-1/8
	(nylon)		
HS-SA-042507	M4×25P=0.7	HS-SA-14112	1/4-20×1-1/2
HS-SA-044007	M4×40P=0.7	HS-SA-14134	1/4-20×1-3/4
HS-SA-051508	M5×15P=0.8	HS-SA-56200	5/16-18×2
HS-SA-064010	M6×40P=1.0	HS-SA-56212	5/16-18×2-1/2
HS-SA-065010	M6×50P=1.0	HS-SA-38300	3/8-16×3
HS-SA-083012	M8×30P=1.25	HS-SA-38400	3/8-16×4
HS-SA-085012	M8×50P=1.25	HS-SA-12300	1/2-13×3
HS-SA-086512	M8×65P=1.25	HS-SA-12412	1/2-13×4-1/2
HS-SA-105015	M10×50P=1.5	HS-SA-58500	5/8-11×5
HS-SA-107515	M10×75P=1.5		
HS-SA-109015	M10×90P=1.5		
HS-SA-125017	M12×50P=1.75		

ADJUSTABLE SPINDLE ASSEMBLIES



CONE CUSHION-TIP BONDED NEOPRENE CAP

Prat N0.	Description
HS-CC-10138	3/16-24×1-3/8
HS-CC-14134	1/4-20×1-3/4
HS-CC-14214	1/4-20×2-1/8
HS-CC-14218	1/4-20×2-1/8
HS-CC-56212	5/16-18×2-1/2
HS-CC-56300	5/16-18×3
HS-CC-38312	3/8-13×3-1/2

SWIVEL FOOT ADJUSTABLE SPINDLE ASSEMBLIES



Prat N0.	Description	Prat N0.	Description
HS-SF-05035	M5×35P=0.8	HS-SF-14214	1/4-24×2-1/4
HS-SF-06050	M6×50P=1.0	HS-SF-56234	5/16-18×2-3/4
HS-SF-08065	M8×65P=1.25	HS-SF-38300	3/8-16×3
HS-SF-10085	M10×85P=1.5	HS-SF-12400	1/2-12×4
HS-SF-12100	M12×100P=1.75		
HS-SF-16150	M16×150P=2.0		

FLANGED WASHERS FOR U-BAR CLAMPS



Prat N0.	Description
HS-FW-080	For #8 spindle
HS-FW-100	For #10 spindle
HS-FW-140	For 1/4 spindle
HS-FW-141	For 1/4 spindle
HS-FW-516	For 5/16 spindle
HS-FW-380	For 3/8 spindle
HS-FW-120	For 1/2 spindle
HS-FW-580	For 5/8 spindle

NEOPRENEN CAPS



SLIPS ON STANDRD ADJUSTABLE SPINDLE HEADS

Prat N0.	Description
HS-NC-140	For 1/4 spindle
HS-NC-516	For 5/16 spindle
HS-NC-380	For 3/8 spindle
HS-NC-120	For 1/2 spindle

BOLT RETAINERS



WELDON FOR SOLID-BAR CLAMPS

Prat N0.	Description
HS-BR-140	For 1/4 spindle
HS-BR-141	For 1/4 spindle
HS-BR-516	For 5/16 spindle
HS-BR-380	For 3/8 spindle
HS-BR-120	For 1/2 spindle
HS-BR-580	For 5/8 spindle



①車葉子板焊接夾具


②摩托車架焊接夾具

③車身焊接夾具

④車側板焊接夾具

⑤車窗骨架焊接夾具

⑥車門焊接夾具

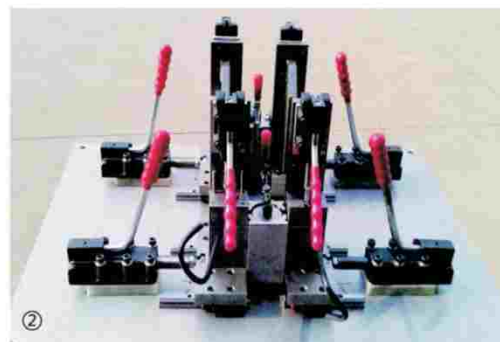



氣動剪刀

◆主體及配套刀頭


- HLF-3A
- HLY-3A
- HLS-3A




應用于：電子裝配行業、塑膠行業、自動化剪切行業、
繞綫機行業、非標自動化行業等領域




HLF-3A主體（氣缸）

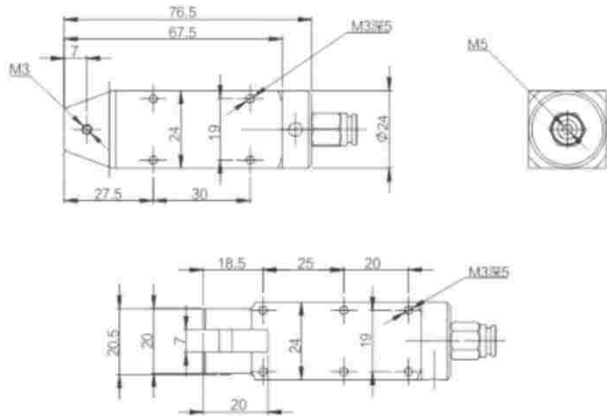

HLY-3A主體（氣缸）

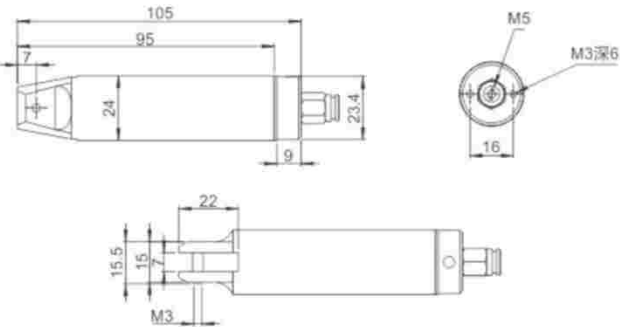


HLS-3A主體（氣缸）

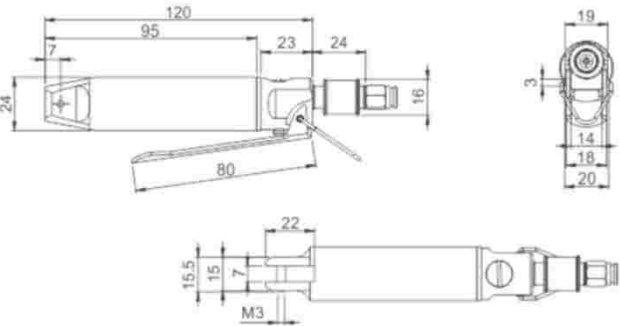

主體型號	重量	氣體消耗量	進氣口	使用氣壓	可裝配刀刃	主體材質
HLF-3A(方形)	80g	45cm ³ /次	6mm	0.4~0.5Mpa	HF10、HF10S、HS20	鋁合金硬質氧化
HLY-3A(圓形)	80g					
HLS-3A(手持式)	100g					


HF10塑料水口斜口剪鉗



▶ 切斷能力
Cutting off effect

塑料材質專用刀刃	剪切力		材質
	軟塑料	硬塑料	
可裝配主體 HLF-3A/HLY-3A/HLS-3A	2mm	1.5mm	合金鋼



HF10S塑料水口平口剪鉗



▶ 切斷能力
Cutting off effect

塑料材質專用刀刃	剪切力		材質
	軟塑料	硬塑料	
可裝配主體 HLF-3A/HLY-3A/HLS-3A	2mm	1.5mm	合金鋼




HS20金屬圓頭斜口剪鉗



▶ 切斷能力
Cutting off effect

金屬材質專用刀刃	剪切力		材質
	銅	鐵	
可裝配主體 HLF-3A/HLY-3A/HLS-3A	1.2mm	0.8mm	合金鋼

直線導軌

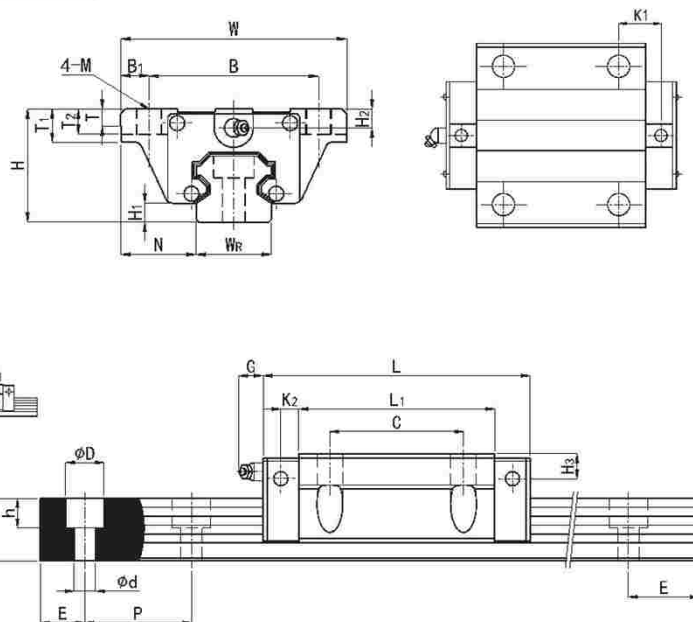
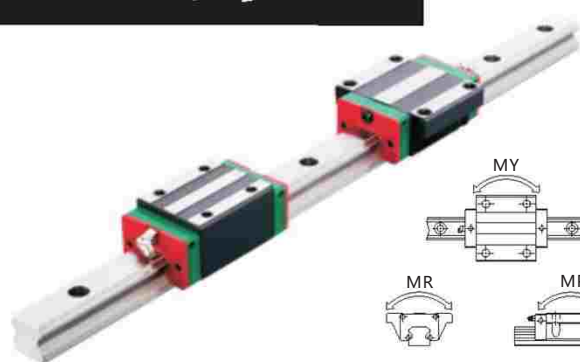


滾珠式直線導軌特徵:

直線導軌，為四列式單圓弧牙型接觸直線導軌，同時整合最佳化結構設計之重負荷精密直線導軌，相較於其他之直線導軌提升了負荷與剛性能力；具備四方向等負載特色、及自動調心的功能，可吸收安裝面的裝配誤差，得到高精度的訴求。此產品具備高速度、高負荷、高剛性與高精度。

規格型號	H	90	mm
	H1	15	mm
	N	53.5	mm
滑塊尺寸	W	170	mm
	B	142	mm
	B1	14	mm
	C	110	mm
	L1	203.6	mm
	L	259.6	mm
	K1	52.8	mm
	K2	14	mm
	G	12.9	mm
	M	M16	mm
	T	25	mm
	T1	37.5	mm
	T2	23	mm
	H2	15	mm
	H3	15	mm
導軌尺寸	WR	63	mm
	HR	53	mm
	D	26	mm
	h	22	mm
	d	18	mm
	p	150	mm
	E	35	mm
導軌的固定螺栓尺寸	導軌的固定螺栓尺寸	M16x50	mm
基本額定負荷	動負荷C	208.36	kN
	靜負荷C0	303.13	kN
容許靜力矩	MR	9.38	kN-m
	Mp	7.38	kN-m
	My	7.38	kN-m
重量	滑塊	12.89	kg
	導軌	21.1	kg/m

氮氣彈簧

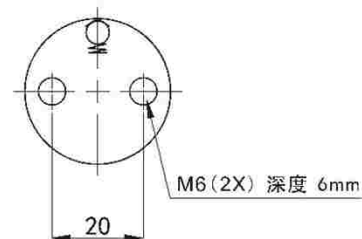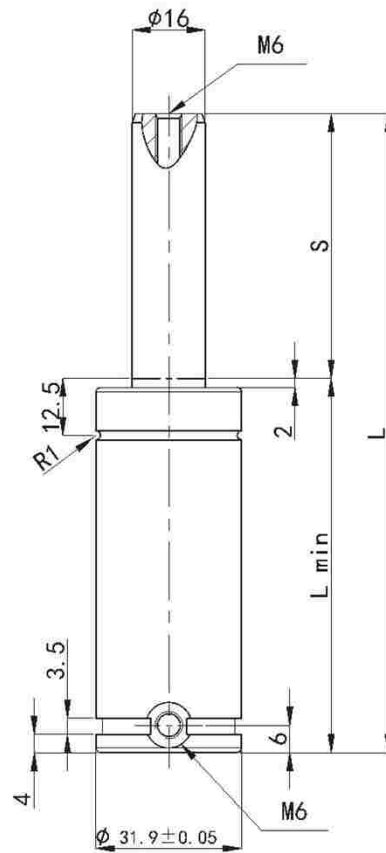


產品特性

1. 體積小，結構緊湊，彈力大，行程長；
2. 工作平穩，制造精密，使用壽命長。

型號	行程S	總長L(±0.25)	缸體長度L(min)	初始力N	終壓力N
HJC-350-010	10	50	40	3600	5900
HJC-350-013	13	56	43	3600	5200
HJC-350-016	16	62	46	3600	5300
HJC-350-019	19	68	49	3600	5600
HJC-350-025	25	80	55	3600	5500
HJC-350-025-1	32	94	62	3600	5500
HJC-350-038	38	106	68	3600	5500
HJC-350-050	50	130	80	3600	5600
HJC-350-063	63	156	93	3600	5500
HJC-350-075	75	180	105	3600	5500
HJC-350-080	80	190	110	3600	5500
HJC-350-100	100	230	130	3600	5500
HJC-350-125	125	280	155	3600	5500

可調式搪孔頭

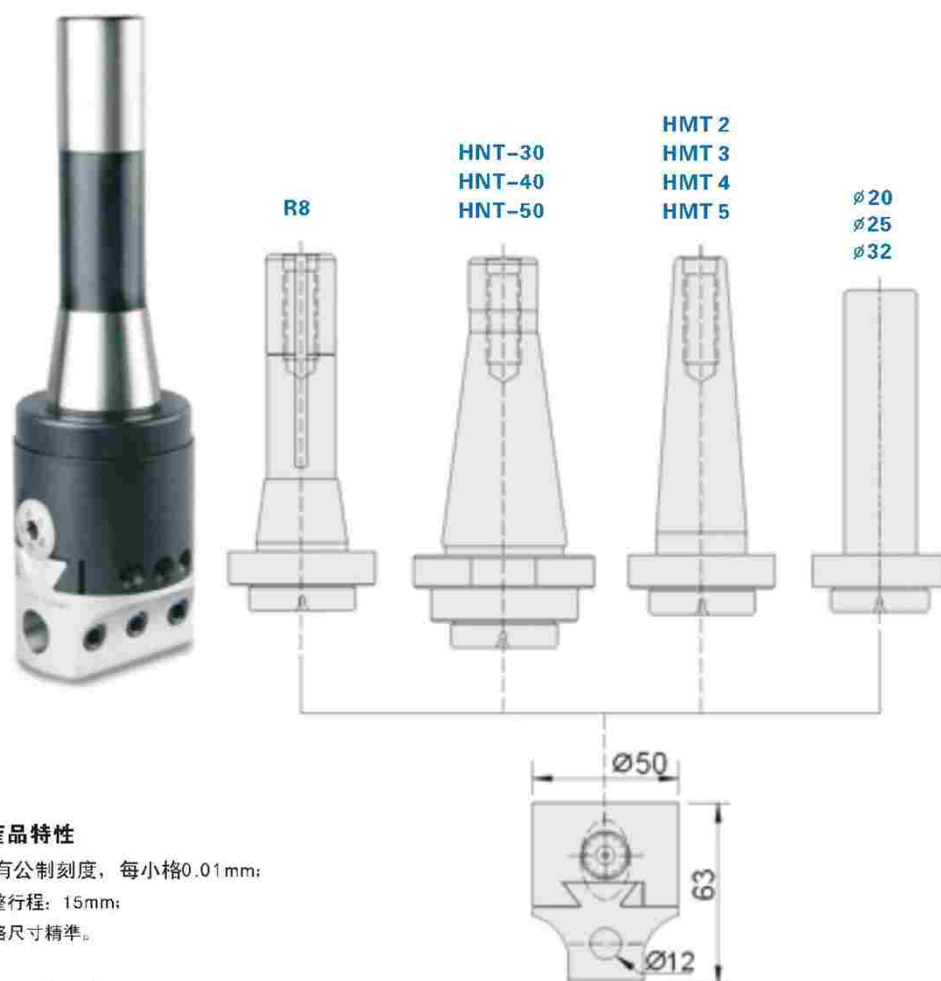


產品特性

1. 刻有公制刻度，每小格0.01mm；
2. 調整行程：15mm；
3. 規格尺寸精準。

型號	規格	重量N.W.
HBHC2+R8	7/16×20UNC	1.3kg
HBHC2+HNT30	M12×P1.75	1.3kg
HBHC2+HNT40	M16×P2.0	2.0kg
HBHC2+HNT50	M24×P3.0	3.9kg
HBHC2+HMT2	M10×P1.5	1.0kg
HBHC2+HMT3	M12×P1.75	1.2kg
HBHC2+HMT4	M16×P2.0	1.6kg
HBHC2+HMT5	M24×P3.0	2.1kg
HBC2+ø20	ø20×60L	1.1kg
HBC2+ø25	ø25×60L	1.2kg
HBC2+ø32	ø32×60L	1.4kg

聯軸器

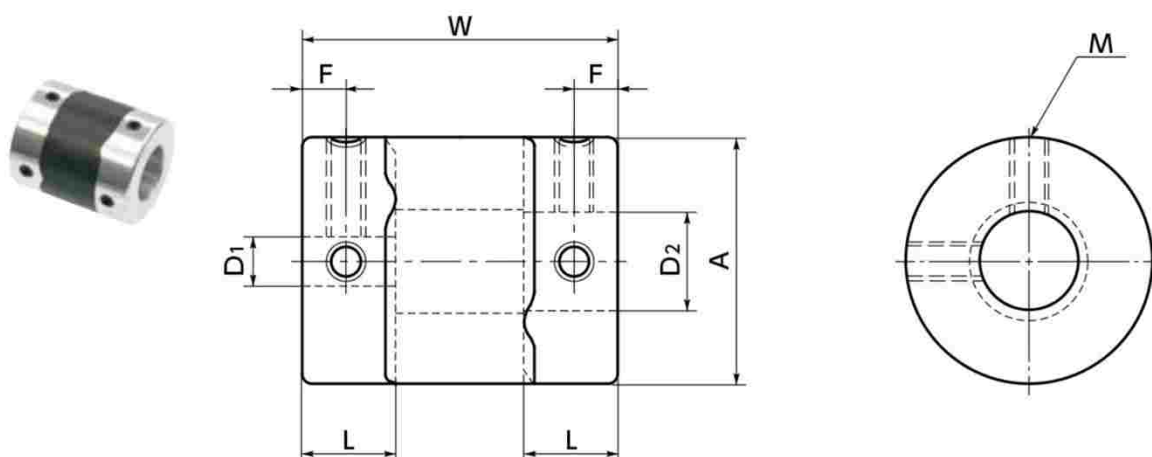

型號表示

1 型號 - 2 孔徑
HXGT-15 - 6-6

產品特性

高能力可移動性，高緩沖性、安全、強度大，使用壽命長。

1 型號	A	L	W	F	M	螺絲緊固扭矩 (N·m)
HXGT-15	15	6.5	23	3	M3	0.7
HXGT-19	19	7.7	26	4	M3	0.7
HXGT-25	25	9.5	32	5	M4	1.7
HXGT-27	27	9.5	32	5	M4	1.7
HXGT-30	30	11	36	5.5	M4	1.7
HXGT-34	34	12	38	6	M5	4
HXGT-39	39	15.5	48	8	M5	4
HXGT-44	44	15	48	7.5	M6	7
HXGT-56	56	19.5	60	10	M6	7


型號	標準軸孔徑 (尺寸容許偏差H8) D1-D2 2									
HXGT-15	3-5	3-6	4-4	4-5	4-6	4.5-5	5-5	5-6	6-6	
HXGT-19	4-5 6.35-8	4-8 8-8	5-5	5-6	5-7	5-8	6-6	6-6.35	6-7	6-8
HXGT-25	5-6 8-10	5-8 8-11	6-6 8-12	6-8 10-10	6-10 10-12	6-11 12-12	6-12	6.35-8	6.35-10	8-8
HXGT-27	5-6 8-10	5-8 8-11	5-14 8-12	6-6 8-14	6-8 10-10	6-10 10-12	6-11 10-14	6-12 12-12	6-14 12-14	8-8 14-14
HXGT-30	8-8 10-15	8-10 11-12	8-11 12-12	8-12 12-14	8-14 12-15	8-15 14-14	10-10 14-15	10-11 15-15	10-12	10-14
HXGT-34	8-8 10-15	8-10 11-11	8-11 11-12	8-12 12-12	8-14 12-14	8-15 12-12	10-10 14-14	10-11 14-15	10-12 15-15	10-14 16-16
HXGT-39	10-10 20-20	10-12 14-14	10-14 14-15	10-15 14-16	10-16 15-15	12-12 15-16	12-14 15-19	12-15 16-16	12-16 17-17	12-19 20-20
HXGT-44	12-12 15-19	12-14 15-20	12-16 16-16	12-19 16-19	14-14 17-17	14-15 19-20	14-16 20-20	14-19	15-15	15-16
HXGT-56	15-15	15-19	15-20	15-25	19-20	19-24	20-20	20-25	24-25	25-25

1. 所有產品均附帶內六角止動螺絲。
2. 軸孔徑為φ4以下時，附帶1個止動螺絲。
3. 適用軸徑的推薦尺寸公差為h6及h7。

無油襯套



代号	类型	材质	内径公差	外径公差	硬度 HB	使用温度范围 (°C)
HOFABZ	直柱标准型	高力黄铜 + 固体润滑剂 GR1	F7	m6	≥ 210	-50~+150

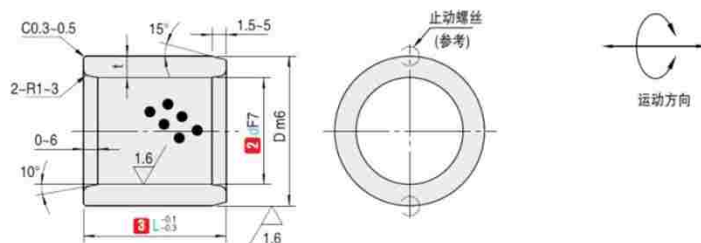

■ 型號表示


1 型號 - 2 d - 3 L

HOFABZ- 30 - 10

■ 產品特性

銅合金系列中最常用的規格，薄壁型的厚度與干式襯套同級，
耐磨性比干式襯套優異，可承受重載。

1 型號	2 dF7	Dm6	3 L	t	基準孔尺寸	推荐公差 H7
HOFABZ	5	+0.022	8 9 10 12 15	2	9	+0.015
	6	+0.010	8 9 10 12 15 16 19 20		10	0
	8	+0.028	8 9 10 12 15 16 19 20 25		12	+0.018
	10	+0.013	8 9 10 12 15 16 19 20 25 30		14	0
	12		8 9 10 12 15 16 19 20 25 30 35	3	18	
	13		10 12 15 16 20 25 30 35		19	
	14	+0.034	10 12 15 20 25 30		20	+0.021
	15	+0.016	9 10 12 15 16 19 20 25 30 35 40		21	0
	16		9 10 12 15 16 19 20 25 30 35 40	4	22	
	18		9 10 12 15 16 20 25 30 35 40		24	
	20		9 10 12 15 16 19 20 25 30 35 40 50 60		28	
	20A		10 12 15 16 20 25 30 35 40 50		30	
	22		10 15 20 25	5	32	
	25	+0.041	12 15 16 19 20 25 30 35 40 50 60	4	33	+0.025
	25A	+0.020	12 15 16 20 25 30 35 40 50 60		35	0
	28		20 25 30 40		38	
	30		12 15 16 20 25 30 35 40 50 60 70		38	
	30A		12 15 16 20 25 30 35 40 50 60 70	5	40	+0.030
	32		20 30 40		42	0
	35		20 25 30 35 40 50 60 70		44	
	35A		20 25 30 35 40 50 60 70		45	
	40		15 20 25 30 35 40 50 60 70 80 90 100	7.5	50	+0.035
	40A		15 20 25 30 35 40 50 60		55	0
	45	+0.050	30 35 40 50 60		55	
	45A	+0.025	12 30 35 40 50 60		55	
	45B		30 35 40 50 60 70 80	7.5	60	+0.040
	50		20 30 35 40 50 60 70 80		60	0
	50A		30 35 40 50 60 70 80		62	
	50B		30 35 40 50 60 70 80 90 100		65	
	55		30 35 40 50 60 70	7.5	70	+0.045
	60		30 35 40 50 60 70 80 100		74	0
	60A		30 35 40 50 60 70 80 90 100		75	
	63		50 60 70 80		75	
	65		40 50 60 70 80	7.5	80	+0.050
	70	+0.060	30 35 40 50 60 70 80 90 100		85	0
	70A	+0.030	50 60 70 80 90 100		90	
	75		50 60 70 80 90 100		90	
	75A		60 70 80 90 100	8	95	+0.055
	80		40 50 60 70 80 90 100 120		96	0
	80A		40 50 60 70 80 90 100 120 130 140		100	
	85		60 70 80		100	
	90		30 40 50 60 70 80 90 100 120	10	110	+0.060
	100	+0.071	50 60 70 80 90 100 120 130 140		120	0
	110	+0.036	50 60 70 80 100 120		130	
	120		60 70 80 90 100 120 130 140		140	
	125		80 100 120 140	10	145	+0.065
	130	+0.040	80 100 120 130 140		150	0
	140	+0.015	100 120 130 140 150		160	
	150		80 100 120 140 150		170	
	160	+0.083	80 100 120 140 150	10	180	+0.070
	170	+0.043	80 100 120 140 150 160		190	0
	180		100 120 140 150 160 180		200	
	190	+0.096	100 120 140 150 160 180 200		210	
	200	+0.050	100 120 140 150 160 180 200 220	15	230	

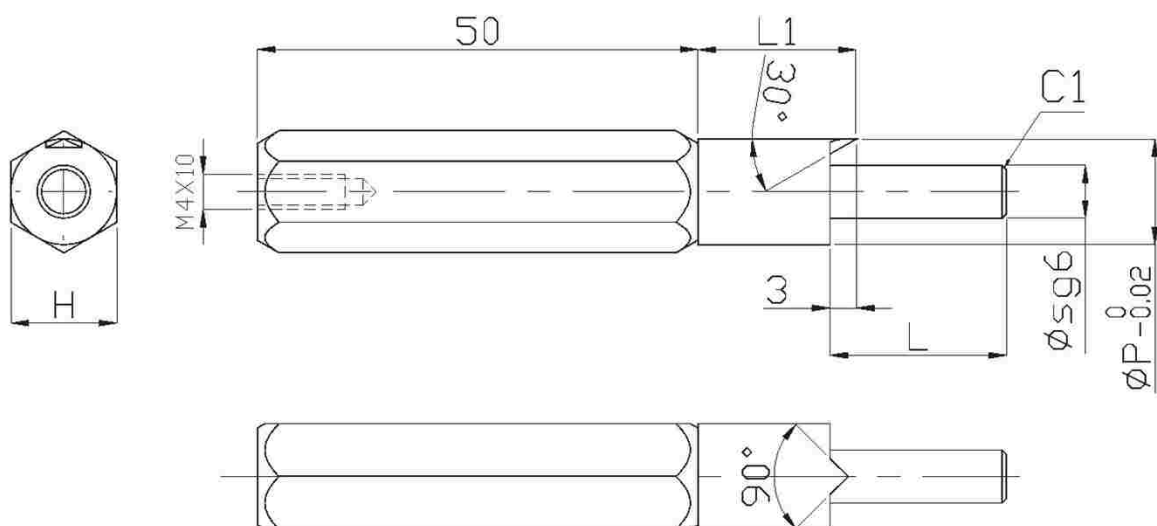

1 2 3 4 5


HS - H - P - S - L - L1

零件	材質	硬度	技術要求
把手部	LY12(六角形)+顏色陽極氧化		1. 未注倒角C0.5 2. 導向削0.1mm通氣 3. 去尖角銳邊，修毛利 4. 零件表面電鍍硬鉻處理，中性鹽霧試驗48H 5. 連續部位過盈配合，連接力矩 $\geq 300\text{N}$ 6. 其他未注公差 $\pm 0.30\text{mm}$
量規部	SKS3	55-58HRC	

⚠ 手柄部位可換成圓柱形（材料不銹鐵），外圓滾花（鋁制把手，顏色可選紅、黃、藍、綠、黑）

H ①	P指定單位0.01mm②	S(單位1mm) ③	L長度(單位: mm)④	L1指定單位1mm ⑤
10	4.00~6.00	ø4	15-20	10-15
12	6.01~12.00	ø6		
14	12.01~16.00	ø8		
16	16.01~20.00	ø10		
18	20.01~	ø12		

固定金屬支脚

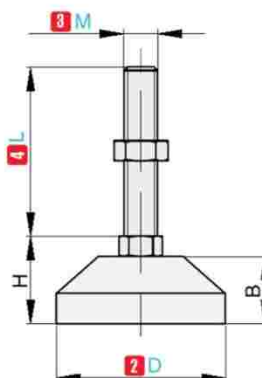

HSFM

HSFMR(底部帶膠墊)

標準型

型號表示

1 型號 - 2 底徑 - 3 螺紋直徑 × 4 螺紋長度 - 5 材料代碼

HSFM - 60 - M16 × 100 - D


產品特性

底部與螺桿為不銹鋼或碳鋼，承載力大。

1 型号	底 径		主要尺寸			最大静载 P (kg)		
	2 D	3 M	4 L	H	B			
HSFM HSFMR(底部带胶垫)	50	M10	50	30	20	800		
			100			1000		
		M12	50			1000		
			100			1200		
	60	M12	50			36	26	3000
			100					
			M16					
								100
		M20	50	3000				
			100					
			130					
			150					
	80	M20	100	36	26	3000		
			150					
			180					
			100					
		M24	100			3000		
			150					
			180					
			100			M16	100	36
	150							
	180							
	100							
	M20	150		3000				
		180						
		100						
		150						
	150	M24	180	36	26	3000		
			100					
			150					
			180					
		M16	100			3000		
150								
100								
150								
M20	100	3000						
	150							
	100							
	150							

型号	5 材料代码	底座	螺杆	
		材质	材质	表面处理
HSFM	C	碳钢	碳钢	镀铬
HSFMR(底部带胶垫)	D	不锈钢	不锈钢	无

三維柔性焊接平臺

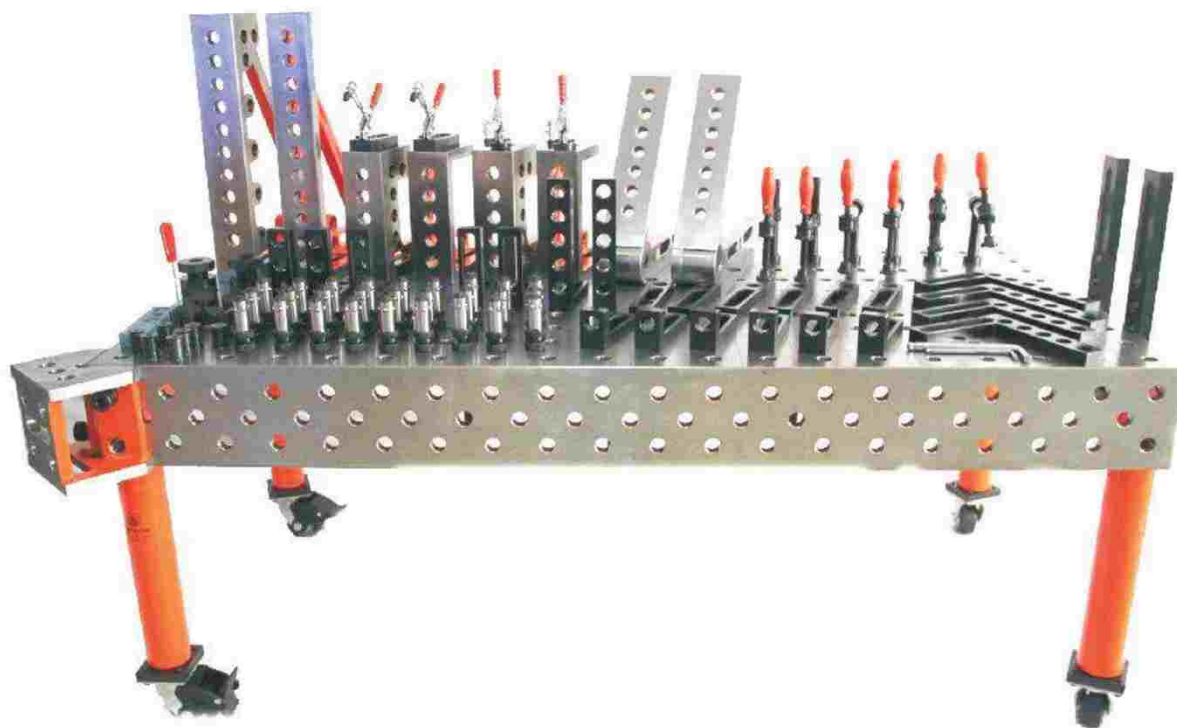

三維柔性焊接平臺尺寸： (材料q345 也可以稱16mn)

長x寬(mm):1000x1000/1200x1200/500x1500/2000x1000/2400x1200/3000x1500/4000x2000

三維鑄件平臺尺寸： (鑄鐵ht300)

2000x1000/2400x1200/3000x1500

所有三維平臺側面高度為200mm

二維平臺尺寸：

1000x1000 / 2000x1000 / 2400x1200 / 1200x1200 / 1500x1500 / 3000x1500

三維孔系組合柔性焊接工藝裝備。

三維： 代表三個方向一般夾具都是縱向和橫向沒有垂直方向。平臺大面有二個方向，四周還可用作垂直方向的安裝，從而達到立體組合。

孔系： 這套夾具的主要特點就是從平臺到附件都是標準孔沒有傳統的螺紋或t型槽，配合快速鎖銷就能使裝配變得更加快捷方便，定位更精確。

組合： 因為所有附件都是事先預制好的，可根據產品的需求任意組合及調整。

柔性： 因為有上述功能整套裝備可根據產品的變化而變化，一套夾具就可完成幾個產品或幾十個產品的需求，從而大大的加快了產品的研發、試制的進程，節省大量的人力、物力和財力(環保和低碳產品)。

焊接： 本產品是專為焊接制品的制造而設計的通用夾具;用于焊接十分方便、靈活、精確，與傳統的焊接方式先進許多。

孔尺寸：

φ28系列平臺：孔公差是d10級，與平臺相配的鎖銷是h7級。相鄰兩孔的孔心距是 $100 \pm 0.05\text{mm}$

φ16系列平臺：孔公差是d10級，與平臺相配的鎖銷是h7級。相鄰兩孔的孔心距是 $50 \pm 0.05\text{mm}$ ，

工作臺立柱分三種形式： 高度(分三種)承重均為2t，固定(框架型)承重為5t，活動(升降型)承重為3t，(帶剎萬向輪型)承重為1t。

磁力夾具



HDLK-100




HDLK-150



型號	外型尺寸 (mm)	最大吸力(kg)	重量 (kg)	定位角度 (度)
HDLK-100	130 × 130 × 40	50 × 2	1.3	90
HDLK-150	172 × 172 × 48	100 × 2	2.73	90
HDLK-150J	172 × 172 × 48	100 × 2	2.76	90

產品特性

1. 最大可提供100kg的夾持力，滿足大工件的夾持作業。
2. 零件測量劃線：磁力夾具強大的磁力和精度可以代替磁力方箱的使用，進行零件的劃線和測量等工作，具有攜帶方便，自由拼裝等優勢。
3. 零件加工：多只磁力夾具配合可以將零件很好地固定在工作臺上，進行鑽孔、打磨、組裝、緩切割等作業，裝夾簡便，大大提高工作效率。

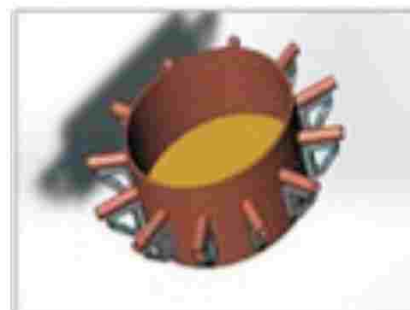

PNEUMATIC AND HYDRAULIC CLAMP

HCAS 空壓/HSL油壓轉角缸
 HCAS Air/HSL Hydraulic
 Swing Clamp Cylinder



HPSU/HNSU上法蘭
 配管式空/油壓轉角缸
 HPSU HNSU Uppers
 Flange pneumatic/
 hydraulic Swing
 Clamp Cylinder



HSV油壓順序閥
 Hydraulic
 Sequence Valve



HPB感應式空壓轉
 角缸焊接專用
 HPB Air Swing
 Clamp Cylinder



HPSB空壓塊狀轉角缸
 HPSB Pneumatic Swing
 Clamp, Block version



HPLCU 空壓杠杆缸
 HPLCU Leverage
 Clamping cylinder



HTB薄型油壓缸
 HTB Hydraulic
 thin-type cylinder



HLC 杠杆式油壓缸
 HLC Hydraulic
 Leverage-type cylinder



HTC外螺紋小型油壓單動缸
 HTC Thread-body Single
 Acting Hydraulic Cylinder



HSP油壓支撐缸
 HSP Hydraulic
 Supporting Cylinder



HPS 高壓轉角缸
 HPS Oil Pressure Swing
 Calmping Cylinder



030底部法蘭轉角缸
 030 Hydraulic Swing
 Clamps, Bottom Flange



040外螺紋固定轉角缸
 040 Hydraulic Swing
 Clamps, Thread-body



050頂部法蘭轉角缸
 050 Hydraulic Swing
 Clamps, Upper Flange



HB油壓增壓器
 Hydraulic Booste



HCQ2薄型鋁合金氣缸
 HCQ2 Compact
 Pneumatic Cvinders



快速肘節夾鉗系列



垂直式夾鉗



水平式夾鉗



气动夾鉗



門栓式夾鉗



焊接組立式夾鉗



推拉式夾鉗



大力鉗

氣&油壓缸系列



空壓轉角缸



空壓支撐缸



油壓高動力杠杆缸



高壓轉角缸



HFZ氣動手指



CXS雙軸氣缸系列



CQ2薄型氣缸系列



上法蘭支撐缸



同步油缸



油壓支撐缸

液壓站(液壓動力單元)



變頻調節器液壓站



數控車床液壓站



緊湊節能型液壓站